Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal

MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 284 Quehl Ave N, Lakeland, MN **Site Conditions:** 12" Snow 30" Frost

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This system consists of two pre-cast septic tanks, a pre-cast lift tank, and a chamber trench drainfield.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (I requirements and attached forms – additional local requirements may also apply.				
Submit completed form to Local Unit of Government (LUG) and system of within 15 days	wner			
System Status				
System status on date (mm/dd/yyyy): _2/12/2018				
_ ·	oncompliant – Notice of Noncompliance See Upgrade Requirements on page 3)			
Reason(s) for noncompliance (check all applicable)				
☐ Impact on Public Health (Compliance Component #1) – Imminent	threat to public health and safety			
☐ Other Compliance Conditions (Compliance Component #3) – Immi	nent threat to public health and safety			
☐ Tank Integrity (Compliance Component #2) – Failing to protect gro				
Other Compliance Conditions (Compliance Component #3) – Failir				
Soil Separation (Compliance Component #4) – Failing to protect g				
Operating permit/monitoring plan requirements (Compliance Comp	onen #0) – Noncompilant			
Property Information	ID-us so			
Property Information Parcel ID# or Sec/Tv				
· · ·	Reason for inspection: Property Transfer Owner's phone: 651-808-7959			
or	wher's phone. <u>051-000-7959</u>			
	epresentative phone:			
•	Regulatory authority phone: 651-430-4052			
Brief system description: Two pre-cast septic tanks, a pre-cast lift tank, and				
Comments or recommendations:				
Certification				
I hereby certify that all the necessary information has been gathered to determined determination of future system performance has been nor can be made due to possible abuse of the system, inadequate maintenance, or future water usage.				
Inspector name: Brian Humpal C	ertification number: L5342			
Business name: Inspect Minnesota, Midwest Soil Testing	License number: L2896			
Inspector signature: Brian Humpal	Phone number: 651-492-7550			
Necessary or Locally Required Attachments				
	rms per local ordinance			
☐ Other information (list): Report Summary, Property Information, Disclaim	•			
- 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10	, =			

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 1 of 3

Property address: _284 Quehl Ave N, Lakeland, MN 55043

Inspector initials/Date: 02/12/2018

1.	In	Impact on Public Health - Compliance component #1 of 5						
	Compliance criteria:			Verification method(s):				
		stem discharge sewage to the bund surface.	☐ Yes ☒ No	 ✓ Searched for surface outlet ✓ Searched for seeping in yard/backup in home ✓ Excessive ponding in soil system/D-boxes 				
	-	stem discharge sewage to drain tile surface waters.	☐ Yes ☐ No	☐ Homeowner testimony (See Comments/Explanation)				
	System cause sewage backup into dwelling or establishment.		☐ Yes ⊠ No	 □ "Black soil" above soil dispersal system □ System requires "emergency" pumping □ Performed dye test 				
		ny "yes" answer above indicates n Imminent Threat to Public Heal		☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)				
		omments/Explanation: one of the above found.						
2.	Ta	ank Integrity – Compliance com	nponent #2 of 5					
	Co	ompliance criteria:		Verification method(s):				
		stem consists of a seepage pit,	☐ Yes ⊠ No	□ Probed tank(s) bottom □				
		sspool, drywell, or leaching pit.		Examined construction records				
		epage pits meeting 7080.2550 may be mpliant if allowed in local ordinance.		☐ Examined Tank Integrity Form (Attach)☐ Observed liquid level below operating depth				
	Sewage tank(s) leak below their designed operating depth.		☐ Yes ☐ No					
	If yes, which sewage tank(s) leaks:			☐ Probed outside tank(s) for "black soil"☐ Unable to verify (See Comments/Explanation)				
		ny "yes" answer above indica /stem is Failing to Protect Gro		☐ Other methods not listed (See Comments/Explanation)				
	Comments/Explanation: Lowered underwater camera into tanks - baffles and tank walls OK.							
	LIŤ	t pump and alarm were operational at	the time of the inspection.					
_	_							
3.	U	ther Compliance Conditions						
	a.	Maintenance hole covers are damaged	d, cracked, unsecured, or app	pear to structurally unsound. ☐ Yes* ☒ No ☐ Unknown				
 b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☒ No ☐ *System is an imminent threat to public health and safety Explain: 								
							C.	c. System is non-protective of ground water for other conditions as determined by inspector ☐ Yes* ☒ No *System is failing to protect groundwater
		Explain:						

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Property address: 284 Quehl Ave N, Lakeland, MN 55043

Inspector initials/Date: 02/12/2018

Date of installation: _2004	Unkr	nown	Verification method(s):			
Shoreland/Wellhead protection/Food Beverage Lodging?	☐ Yes	⊠ No	Soil observation does not expire. P			
Compliance criteria:			observations by two independent parties are suff unless site conditions have been altered or local			
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes	□ No	requirements differ. Conducted soil observation(s) (Two previous verifications (Atta	ch boring logs)		
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.			☐ Unable to verify (See Comments. ☐ Other (See Comments/Explanation	Explanation)		
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	⊠ Yes	□ No	Comments/Explanation: Reviewed design and permit record	ds.		
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV	ental", "Other", or "Performance"		Indicate depths of elevations	0 44 1 1		
or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			A. Bottom of distribution media	See Attached Boring Log(s)		
Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.			B. Periodically saturated soil/bedrock C. System separation			
			D. Required compliance separation*			
Any "no" answer above indicates the system is Failing to Protect Groundwater. *May be reduced up to 15 percent if allowed by Local Ordinance.						
Operating Permit and Nitrogen B	MP* – 0	Compliance	component #5 of 5 🛮 🖂 Not app	licable		
Is the system operated under an Operating Per	mit?	☐ Yes [⊠ No If "yes", A below is required			
Is the system required to employ a Nitrogen BMP? Yes No If "yes", B below is required						
BMP=Best Management Practice(s) specified in the system design						
If the answer to both questions is "no",		-				
•			,			
a. Operating Permit number:			☐ Yes ☐ No			
Have the Operating Permit requirements been met? . Is the required nitrogen BMP in place and properly functioning?						

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3


Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: February 12, 2018	Time: 1:00 PM				
Property Address: 284 Quehl Ave N, Lakeland, MN	Zip: 55043				
Property Owner: Jacob Spychalla	Phone: 651-808-7959				
Tank(s) Tank(s)Material Soil Treatment System Septic 2 Fiberglass Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding Concrete Seepage bed Other: Block Mound Other At-grade	Other Alternative system Experimental system Cesspool system Other system				
Are the tank maintenance covers accessible? ☐ Yes ☐ No *I	no, proper maintenance must be				
performed through the maintenance holes. Maintenance hole co					
the ground surface to facilitate access and proper maintenance of	the system.				
Year house built: 1975 Year septic installed: 2004	Tank size (gals.): 1-1200, 1-000				
	esidents in home?				
Number of bedrooms? 4 Are all floors drained by					
Garbage disposal? Whirlpool bath					
More than one system (laundry, etc.)?					
Does this property have any footing drain tiles connected to the s	eptic system?				
Are any buildings on this property such as garages or out-buildings connected to this system?					
Are there any additional systems on this property serving other b	uildings?				
Location of septic system on lot? Tanks - Southeast Side, Drainf	eld - West Side				
Location of water well on lot? West Side	ne well a deep well? Y				
Have you ever experienced any problems with the system such a	s: tree roots, sewage back-ups,				
surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:					
	nper: Pinky's Sewer Service				
How often pumped in previous years?					
Have you received notices from any government agency concerning this system?					
Is your property located in a shoreland management area? N					
Do you have any additional information that should be given to the new owner?					
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection					

Owner/Occupant: Date:

by Inspect Minnesota and Midwest Soil Testing.

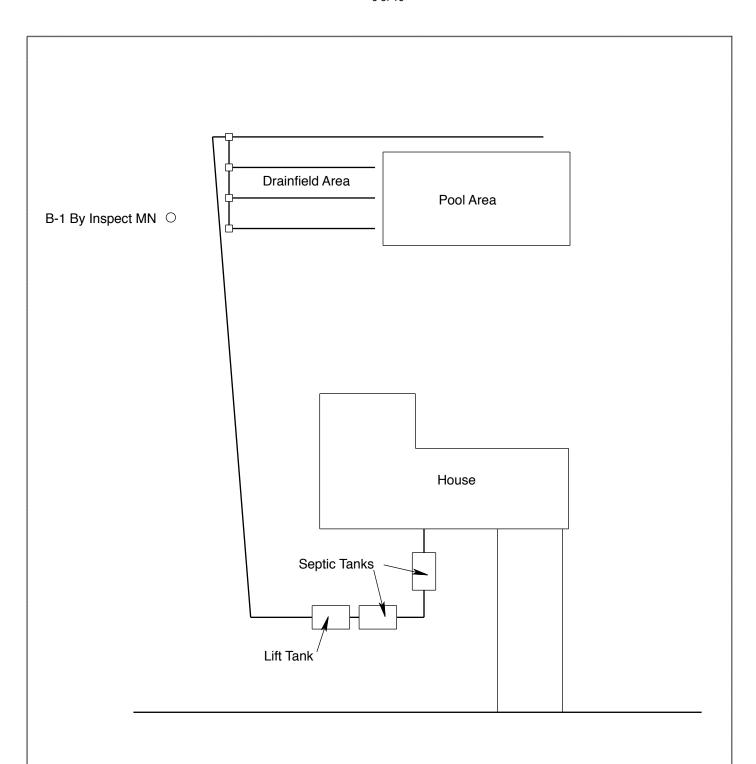

NO SCALE

284 Quehl Ave N, Lakeland, MN 55043

Log Of Soil Borings

Location of Project: 284 Quehl Ave N, Lakeland, MN 55043							
Borings Made By: Inspect Minnesota					2/12/18		
Auger Used: Hand/Bucket			Classification System: USDA				
Boring Number: 1			Boring Number:				
Surface Elevation Boring	of Same grou	and surface as last	Surface Elevation (Boring	of			
Depth In Inches	Soils E	ncountered	Depth In Inches	Soils Er	Soils Encountered		
0-30 30-65	10YR 3/4 Loar ≈20-30%	Medium Sand n Sand With Gravel Rock Fragments sal At 65"					
65"	Depth To End Of B	oring Or Redox		Depth To End Of Bo	oring Or Redox		
Same	Elevation Of Boring	g Relative To System	[Elevation Of Boring	Relative To System		
-30"					f Distribution Media		
≥35"	Of Separation		(Of Separation			
	End Of Boring At:	65"		End Of Boring At:			
	Redox Present At:	None		Redox Present At:			
				Water Present At:			
Standing Water Present At: None			Stariding				

Bottom Of Distribution Medium At: 30 Inches	

8 of 10

		4								
JOHN NO.	hokaland									
LOS OF SOIL BORING		24	Durk brown	CLAVE. SAND	1/8 shall	Red brown		5/44/3	3	
· t	284 Quehl Ave.	1	Dank brown	1 10	•		Reel browns savo	Ralbon con savo f gon	5/44/3	
		Davih Feet		671			•	•		

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems Non-transferable Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2018

Issued: 10/10/2017

es:

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expir		
C9633	Anthony P Scully	7/28/2018		
	Installer, Designer (Conditional)			
C5342	Brian L Humpal	10/15/2020		
	Installer, Maintainer, Serv Prov,	Adv Designer, Adv Inspector		
C9852	Christopher R Uebe	3/4/2018		
	Designer, Inspector			



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Charles & Thompson

Charles K Thompson, Supervisor Certification & Training Unit