## **Inspect Minnesota & Midwest Soil Testing**

P.O. Box 383 Hugo	, MN 55038	Brian Humpal				
651-492-7550/Brian@mid	dwestsoiltesting.com	MPCA Licensed Advanced Inspector				
SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT						
Date: April 27, 2016Time: 10:15 AMOwner: Roger Stack						
Inspection Address: 20611 July Ave N, Forest Lake, MN 55025						

## **REPORT SUMMARY**

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, Roger Stack, and have reviewed the original design/permit records on file at Washington County. This system consists of two pre-cast septic tanks, a pre-cast lift tank, and a rock trench drainfield.

Predicated on my inspection of the system, my review of the history of the system with the owner, and my review of the original design/permit records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Brian Humpal

Brian Humpal

Minnesota Pollution Control Agency 520 Lafayette Road North St. Paul, MN 55155-4194	Compliance Inspection Form Existing Subsurface Sewage Treatment Systems (SSTS) Doc Type: Compliance and Enforcement
Instructions: Inspection results based on Minnesota requirements and attached forms – additional local re-	0,0,0,0
Submit completed form to Local Unit of Governm within 15 days	ent (LUG) and system owner
System Status System status on date (mm/dd/yyyy):	//2016
Compliant – Certificate of Compl (Valid for 3 years from report date, unless frame outlined in Local Ordinance.)	· · ·
Reason(s) for noncompliance (check al	applicable)
Impact on Public Health (Compliance Compliance)	mponent #1) – Imminent threat to public health and safety
Other Compliance Conditions (Compliance)	ce Component #3) – Imminent threat to public health and safety
Tank Integrity (Compliance Component	
	ce Component #3) – Failing to protect groundwater
Soil Separation (Compliance Component)	t #4) – Failing to protect groundwater

Operating permit/monitoring plan requirements (Compliance Component #5) – Noncomplia		Operating	permit/moni	toring plan	requirements	(Compliance	Component	#5) —	Noncomp	liant
--	--	-----------	-------------	-------------	--------------	-------------	-----------	-------	---------	-------

## **Property Information**

Parcel ID# or Sec/Twp/Range:

· · · · · · · · · · · · · · · · · · ·				
Property address	20611	July Ave N, Forest Lake, MN 55025	Reason for inspec	tion: Property Sale
Property owner:	Roger St	tack	Owner's phone:	651-245-3796
or				
Owner's represer	ntative:		Representative ph	ione:
Local regulatory authority: Wa		Washington County	Regulatory author	ity phone:651-430-4052
Brief system desc	cription:	Two pre-cast septic tanks, a pre-cast lift	tank, and a rock trench dra	ainfield.
Comments or rec	ommenda	tions:		

## Certification

I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage.

Inspector name:	Brian Humpal	Certification number:	L5342
Business name:	Inspect Minnesota, Midwest Soil Testing	License number:	L2896
Inspector signatur	e: Brian Humpal	Phone number:	651-492-7550

## **Necessary or Locally Required Attachments**

🛛 Soil boring logs	🛛 System/As-built drawing	Forms per local ordinance
Other information (list):	Report Summary, Property Information	tion, Disclaimer, License

## 1. Impact on Public Health – Compliance component #1 of 5

# Compliance criteria: System discharge sewage to the ground surface. System discharge sewage to drain tile or surface waters. System cause sewage backup into dwelling or establishment.

## Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.

Comments/Explanation:

None of the above found.

## Verification method(s):

- Searched for surface outlet
- Searched for seeping in yard/backup in home
- Excessive ponding in soil system/D-boxes
- Homeowner testimony (See Comments/Explanation)
- "Black soil" above soil dispersal system
- System requires "emergency" pumping
- Performed dye test
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

## 2. Tank Integrity - Compliance component #2 of 5

## **Compliance criteria:**

System consists of a seepage pit, cesspool, drywell, or leaching pit.	🗌 Yes	🛛 No
Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.		
Sewage tank(s) leak below their designed operating depth.	🗌 Yes	🛛 No
If yes, which sewage tank(s) leaks:		

## Any "yes" answer above indicates the system is Failing to Protect Groundwater.

Comments/Explanation:

Lowered underwater camera into tanks - baffles and tank walls OK. Lift pump and alarm were operational at the time of the inspection.

## Verification method(s):

- Probed tank(s) bottom
- Examined construction records
- Examined Tank Integrity Form (Attach)
- Observed liquid level below operating depth
- Examined empty (pumped) tanks(s)
- Probed outside tank(s) for "black soil"
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

## 3. Other Compliance Conditions - Compliance component #3 of 5

- a. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. 🗌 Yes\* 🛛 No 🗌 Unknown
- b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety.  $\Box$  Yes\*  $\boxtimes$  No  $\Box$  Unknown \*System is an imminent threat to public health and safety

Explain:

c. System is non-protective of ground water for other conditions as determined by inspector □ Yes\* ⊠ No \*System is failing to protect groundwater

Explain:

## 4. Soil Separation – Compliance component #4 of 5

	_	Verification method(s):		
Shoreland/Wellhead protection/Food Beverage Lodging?	🗌 Yes 🛛 No	Soil observation does not expire. Previous soil observations by two independent parties are sufficie		
Compliance criteria:	1	unless site conditions have been alt		
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.	☐ Yes ☐ No	<ul> <li>requirements differ.</li> <li>Conducted soil observation(s) (A</li> <li>Two previous verifications (Attac</li> <li>Not applicable (Holding tank(s), not</li> <li>Unable to verify (See Comments/E</li> <li>Other (See Comments/Explanation)</li> </ul>	h boring logs) o drainfield) Explanation)	
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	🛛 Yes 🗌 No	Comments/Explanation: Verified depth and location of drainfi	eld.	
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*				
"Experimental", "Other", or "Performance"	🗌 Yes 🔲 No	Indicate depths of elevations		
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)	pre-2008 Rules; Type IV Inder 2008 Rules (7080.	A. Bottom of distribution media	See Attached Boring Log(s)	
Drainfield meets the designed vertical		B. Periodically saturated soil/bedrock		
separation distance from periodically saturated soil or bedrock.		C. System separation		
		D. Required compliance separation*		
Any "no" answer above indicates a Failing to Protect Groundwater.	the system is	*May be reduced up to 15 percent if Ordinance.	allowed by Local	
Operating Permit and Nitrogen E	<b>3MP*</b> – Complianc	e component #5 of 5 🛛 🛛 Not appl	icable	
s the system operated under an Operating Pe	rmit? 🗌 Yes	⊠ No If "yes", A below is required		
s the system required to employ a Nitrogen Bl		•		
BMP=Best Management Practice(s) speci	ified in the system de	sign		
f the answer to both questions is "no"	, this section doe	s not need to be completed.		
· · · · · · · · · · · · · · · · · · ·				

a.	Operating Permit number:	🗌 Yes 🗌 No
	Have the Operating Permit requirements been met?	
b.	Is the required nitrogen BMP in place and properly functioning?	🗌 Yes 🗌 No

## Any "no" answer indicates Noncompliance.

**Upgrade Requirements** (*Minn. Stat.* § 115.55) *An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.* 

## <u>Inspect Minnesota & Midwest Soil Testing</u>

## Subsurface Sewage Treatment System Owner/Property Information


This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: April 27, 2016	Time: 10:15 AM
	Zin: 55025
Property Address: 20611 July Ave N, Forest Lake, MN Property Owner: Roger Stack	Zip: 55025 Phone: 651-245-3796
Troperty Owner.         Roger Stack           Tank(s)         Tank(s)Material         Soil Treatment	
$\boxed{\texttt{Septic 2}} \qquad \boxed{\texttt{Fiberglass}} \qquad \boxed{\texttt{Son reduction}} \\ \boxed{\texttt{Septic 2}} \qquad \boxed{\texttt{Fiberglass}} \qquad \boxed{\texttt{Rock trench}} \\ \boxed{\texttt{Rock trench}} \\ \boxed{\texttt{Rock trench}} \\ \boxed{\texttt{Septic 2}} \\ \boxed{\texttt{Rock trench}} \\ \\ \texttt{Rock tr$	
Aerobic Plastic Gravelless tr	
Lift Metal Chamber tre	
☐ Holding     ☐ Concrete     ☐ Seepage bed       ☐ Other:     ☐ Block     ☐ Mound	Other system
Other At-grade	
Are the tank maintenance covers accessible? $\boxtimes$ Yes $\square$	No *If no proper maintenance must be
performed through the maintenance holes. Maintenance h	
the ground surface to facilitate access and proper mainten	
	-
Year house built: 1970 Year septic installed: 2005	
How long has seller owned the property? 2005 Num	
Number of bedrooms? 3         Are all floors drain	
	ool bath? N
More than one system (laundry, etc.)? N	
Does this property have any footing drain tiles connected	to the septic system? N
An one buildings on this monorty such as someons on out	huildings connected to this system?
Are any buildings on this property such as garages or out- Floor drain in garage, point of disharge unknown.	-buildings connected to this system?
rioor drain in garage, point of disharge unknown.	
Are there any additional systems on this property serving	other huildings? N
The more any additional systems on ans property serving	ollier oullangs. It
Location of septic system on lot? East Side	
Location of water well on lot? East Side	Is the well a deep well? Y
Have you ever experienced any problems with the system	
surfacing of sewage onto the ground, septic tank overflow	
to the system? N If yes, explain:	ing, etc., of have any repairs been made
When was the system last pumped? 2014 Name	e of pumper: VES
	Is system on a monitoring plan? N
Have you received notices from any government agency of	
Is your property located in a shoreland management area?	
Do you have any additional information that should be give	ven to the new owner? N

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant	: Roger Stac	k's Signature On Fi	le
----------------	--------------	---------------------	----

Date: 4/27/2016

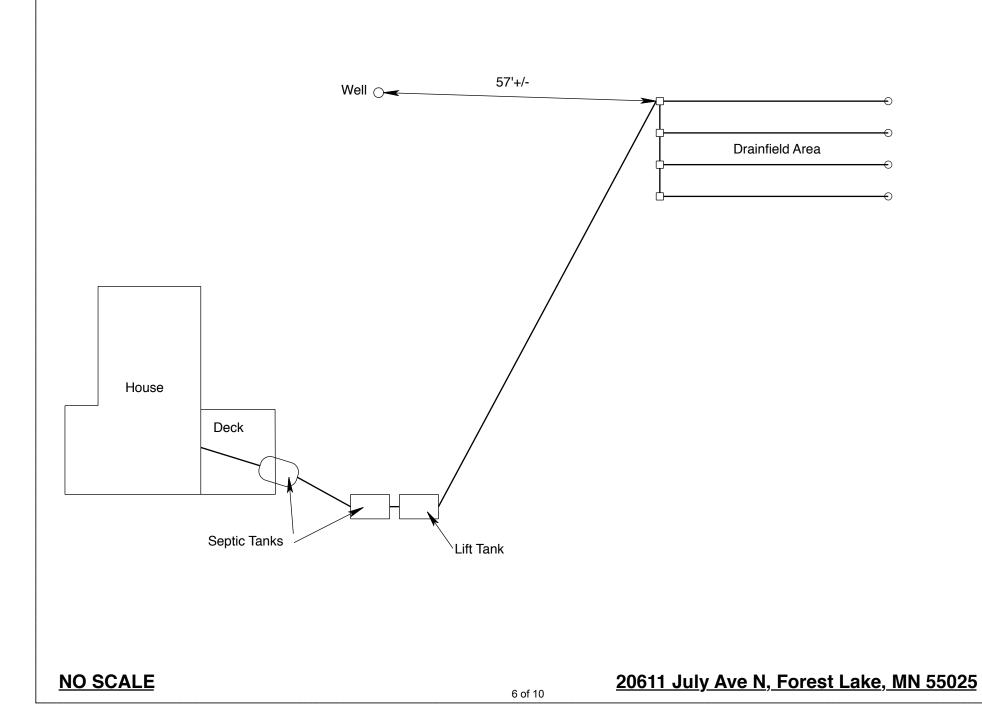

		```			CHECK AL	L THAT APPLY:	C
SITE EVALUATION	C	OUNTY USI	EONLY			CLASS V COMMERCIAL ES	4
					-	FBL ESTABLISHA	
ALUATOR:	LECLAIR						ROTECTION AREA
ATE: 31 AUE 200		A.F. A	(	GEOCODE:	2-21-24	1-0001	
24	TIME JOLY	7) UE 14	k	29-03	2-21-24	2006	
ATE: 31 AUE 200	o <i>5 13</i> :	40					
		SOIL R					
DIL CLASSIFICATION:			PARENT MAT	ERIAL:	DEC		TASH
132 B HAYDE	EN FINE SANDY	, LOAM	100	Strack	SOIL BORIN	10, NES ou	
50	IL BORING 1	MISPLE					
LEVATION OF BORING: 921			ELEVATION C	F BORING:		LOCATION:	
PS COORDINATES: LAT: 45"	14.9105' LON: 92	° 54,5014'	GPS COORDIN	ATES: LAT:		LON:	
B BORING	D PIT	D PROBE		BORING		PIT	
SOIL HORIZON		REDOXIMORPHIC FEATURES	SOIL HORIZON DEPTH (IN)	TEXTURE	COLOR	STRUCTURE	REDOXIMORPHIC FEATURES
	48 1001	בור					
	JR I				·		an a
10"-41" LOAM 4	114 GRAN	NO			<u></u>		
SAND 7 7.	57R 116 GRAN	NO					
53"-60" " " " 10Am 4	STR ERAN	NO					a na antara e
53-60 any 4	19 EPTIN	<u></u>		· · · · ·			
60"- 035	STRUCTION						
		•					
		OIL REVIEW	CONCLUS	IONS			
		DEPTH INFOR			SOIL	TEXTURE: S	AND
	STANDING WATER:					SIZING FACTOR	
UNSUITABLE SOIL DISTURBED SOIL	STANDING WATER.			~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			- 1.27
COMPACTED SOIL	BEDROCK	MAXI	MAXIMUM DEPTH OF S				ATE:
		0		L	[		
			REVIEW	<b>T</b> .		SETBACKS	
CHECK ALL	THAT APPLY	EASE	MENTS ON LO		FLINE	SEIDALAS	
U WETLAND OR WETLAND	VEGETATION	C	UTILITY				
D POND, LAKE, STREAM,				RIVE	ર		
FLOODPLAIN     10 YEAR FLOOD ELEVA	TION		DRAINAGE	PON	, LAKE, STR	EAM, WETLAND	)
		1	OTHER				
	G DEPTH:			WELI	100'	MESS	DEEP
				·····	<u>,,,,,</u>	WELL	DEEP
. 1-	PIE		ASUL		PTH	PR	INR
COMMENTS/NOTES: VE	FIFY W	EU U				1 /	
TO	5 ISSUAN	ILE O	FFE	FMIT	······		<u></u>
<u></u>							
		·····					
							· ·
		7 of	10				

## SOIL BORING LOG

MAC'S SEWER SERVICE: By Michael D. McElhatton-Designer I

	<u>OHN JOHNSON 20611 JULY AVE. N., FOREST LAKE, N</u>	Date: 8/11/05 USDA-SCS; Recovered by hand auger					
Depth Inches	SOIL BORING # PIT BORING Surface Elevation:	Depth Inches	SOIL BORING # Surface Elevation:				
0-32	10yr 4/4 dark brown sand & gravel						
32-66	7.5yr 4/6 med brown clay loam & gravel						
	No Mottling						
End of Boring at <u>5.5</u> ft.		End of Boring at ft.					
Standing Water at ft. Not present in holeX		Standing Water at ft. Not present in hole <u>X</u> .					
Mottled soil at ft Not present in holeX		Mottled soil at ft. Not present in hole					
Commer	Comments:		Comments:				
Depth Inches	SOIL BORING # Surface Elevation :	Depth Inches	SOIL BORING # Surface Elevation :				
End of B	End of Boring at ft.		End of Boring at ft.				
Standing	Standing Water at ft. Not present in holeX		Standing Water at ft. Not present in holeX				
Mottled s	soil at ft. ent in hole	Mottled soil at ft. Not present in hole					
Commen	ts:	Comments:					
1							

## **DISCLAIMER**

## Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing

## Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems



Non-transferable

## License # L2896

Adv Inspector License Expires: Adv Designer License Expires: Maintainer License Expires: Installer License Expires: Date of Issuance:

Oct 28, 2015 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016

# **Inspect Minnesota, Midwest Soil Testing**

	10/15/2017	<u> </u>		0/15/201	03/04/2018	3/04/201
--	------------	----------	--	----------	------------	----------

Ä

**Minnesota Pollution Control Agency** 

520 Lafayette Road North St. Paul, Minnesota 55155-4194

Steven Giddings Manager Environmental Business Assistance Section