Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear	Brian Humpal					
651-492-7550/Brian@Midw	MPCA Licensed Advanced Inspector					
SUBSURFACE SEWAGE T	TREATMENT SYSTEM	I (SSTS) COMPLIANCE REPORT				
Date: October 23, 2019	Time: 10:15 AM	Owner: Pat Kuslich				
Inspection Address: 10343 Dellwood Rd N, Grant, MN 55082						

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, Pat Kuslich, and have reviewed the original design/permit records on file at Washington County. This system consists of two pre-cast septic tanks, a pre-cast lift tank, and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(D) because of the lack of the required three foot separation between the bottom of the drainfield and seasonally saturated soils.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact the Washington County Department of Public Health & Environment (651-430-6655) to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Christopher Uebe

Brian Humpal

Brian Humpal

3	Minnesota Pollution	
	Control Agency	

520 Lafayette Road North St. Paul, MN 55155-4194

Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems

(SSTS)

Page 1 of 3

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA)	
requirements and attached forms – additional local requirements may also apply.	

Submit completed form to Local Unit of Government (LUG) and system owner within 15 days

System Status

System status on date (mm/dd/yyyy): 10/23/2019

Compliant – Certificate of Compliance

(Valid for 3 years from report date, unless shorter time frame outlined in Local Ordinance.)

Noncompliant – Notice of Noncompliance

For local tracking purposes:

(See Upgrade Requirements on page 3)

Reason(s) for noncompliance (check all applicable)

Impact on Public Health (Compliance Component #1) – Imminent threat to public health and safety

Other Compliance Conditions (Compliance Component #3) – Imminent threat to public health and safety

2 of 9

Tank Integrity (Compliance Component #2) – Failing to protect groundwater

Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwater

Soil Separation (Compliance Component #4) – Failing to protect groundwater

Operating permit/monitoring plan requirements (Compliance Component #5) – Noncompliant

Property Information

Parcel ID# or Sec/Twp/Range:

Property address	10343 Dellwood Rd N, Grant, MN 55082	Reason for inspection: Property Transfer			
Property owner: Pat Kuslich		Owner's phone: 651-653-5788			
or					
Owner's represer	tative:	Representative phone:			
Local regulatory authority: Washington County		Regulatory authority phone: 651-430-6655			
Brief system desc	ription:Two pre-cast septic tank, a pre-cast lift tank, and	d a rock trench drainfield.			
Comments or rec	ommendations.				

Comments or recommendations:

Certification

wq-wwists4-31 • 1/24/12

I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage.

Inspector name: Brian Humpal/Christopher Uebe					Certification number:	C5342/C9852		
Business name:	Inspect I	Minnesota, N	lidwes	st Soil Testing		License number:	L2896	
Inspector signatu	re:	Brian ;	Heen	pal Atra	_1/1	Phone number:	651-492-7550	
Necessary or	Locally	y Require	ed At	tachment	S			
Soil boring lo	ogs	🛛 Syst	em/As	s-built drawing	J	Forms per local ordinar	nce	
🛛 Other inform	ation (list)	: Report S	Summa	ary, Property I	inform	nation, Disclaimer, License		
www.pca.state.mn.	.us • 6	51-296-6300	•	800-657-3864	•	TTY 651-282-5332 or 800-657-3864	• Available in alternative formats	

1. Impact on Public Health – Compliance component #1 of 5

🗌 Yes 🖾 No
🗌 Yes 🖾 No
🗌 Yes 🖾 No

an Imminent Threat to Public Health and Safety.

Comments/Explanation:

None of the above found.

Verification method(s):

- Searched for surface outlet
- Searched for seeping in yard/backup in home
- Excessive ponding in soil system/D-boxes
- Homeowner testimony (See Comments/Explanation)
- "Black soil" above soil dispersal system
- System requires "emergency" pumping
- Performed dye test
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

2. Tank Integrity – Compliance component #2 of 5

Compliance criteria:		Verification method(s):
System consists of a seepage pit,	🗌 Yes 🛛 No	Probed tank(s) bottom
cesspool, drywell, or leaching pit.		Examined construction records
Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.		 Examined Tank Integrity Form (Attach) Observed liquid level below operating depth
Sewage tank(s) leak below their	🗌 Yes 🛛 No	Examined empty (pumped) tanks(s)
designed operating depth.		Probed outside tank(s) for "black soil"
If yes, which sewage tank(s) leaks:		Unable to verify (See Comments/Explanation)
Any "yes" answer above indic system is Failing to Protect G		Other methods not listed (See Comments/Explanation)

Comments/Explanation:

Lowered underwater camera into tanks - baffles and tank walls OK. Lift pump and alarm were operational at the time of the inspection.

3. Other Compliance Conditions - Compliance component #3 of 5

a.	Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound.	□ Yes*	🛛 No	Unknown

b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. \Box Yes* \boxtimes No \Box Unknown *System is an imminent threat to public health and safety

Explain:

c. System is non-protective of ground water for other conditions as determined by inspector □ Yes* ⊠ No *System is failing to protect groundwater

Explain:

4. Soil Separation – Compliance component #4 of 5

Date of installation: 2000	Unknown	Verification method(s):	
Shoreland/Wellhead protection/Food Beverage Lodging?	🛛 Yes 🗌 No	Soil observation does not expire. Pr	
Compliance criteria:		observations by two independent pa unless site conditions have been alt	
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.	☐ Yes ☐ No	requirements differ. Conducted soil observation(s) (A Two previous verifications (Attac Not applicable (Holding tank(s), not Unable to verify (See Comments/A Other (See Comments/Explanation)	h boring logs) o drainfield) Explanation)
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	🗌 Yes 🖾 No	Comments/Explanation:	
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*			
"Experimental", "Other", or "Performance"	🗌 Yes 🔲 No	Indicate depths of elevations	
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)		A. Bottom of distribution media	See Attached Boring Log(s)
Drainfield meets the designed vertical		B. Periodically saturated soil/bedrock	
separation distance from periodically saturated soil or bedrock.		C. System separation	
		D. Required compliance separation*	
Any "no" answer above indicates t Failing to Protect Groundwater.	he system is	*May be reduced up to 15 percent if Ordinance.	allowed by Local
Operating Permit and Nitrogen B	MP* – Compliance	component #5 of 5 🛛 🛛 Not appl	icable
Is the system operated under an Operating Per		No If "yes", A below is required	
Is the system required to employ a Nitrogen BM	IP? □Yes □] No If "yes", B below is required	
BMP=Best Management Practice(s) speci	fied in the system desig	qn	

If the answer to both questions is "no", this section does not need to be completed.

Compliance criteria

5.

a.	Operating Permit number: Have the Operating Permit requirements been met?	Yes No
b.	Is the required nitrogen BMP in place and properly functioning?	Yes No

Any "no" answer indicates Noncompliance.

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

Inspect Minnesota & Midwest Soil Testing

Subsurface Sewage Treatment System Owner/Property Information


This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: October 23, 2019	Time: 10:15 AM					
Property Address: 10343 Dellwood Rd N, Grant,	MN Zip: 55082					
Property Owner: Pat Kuslich	Phone: 651-653-5788					
⊠Septic 2 □Fiberglass ⊠Roc □Aerobic □Plastic □Grav ⊠Lift □Metal □Cha						
Are the tank maintenance covers accessible? Ye performed through the maintenance holes. Mainten the ground surface to facilitate access and proper m	nance hole covers should be made accessible to					
Year house built: 1973 Year septic installed	e ,					
How long has seller owned the property? 1995	Number of residents in home? 1-3					
	rs drained by gravity? Lower Pumped					
<u> </u>	Vhirlpool bath? Y					
More than one system (laundry, etc.)? N						
Does this property have any footing drain tiles connected to the septic system? N Are any buildings on this property such as garages or out-buildings connected to this system? N						
Are there any additional systems on this property s	erving other buildings? N					
Location of septic system on lot? Northeast Side						
Location of water well on lot? North Side	Is the well a deep well? Y					
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? N If yes, explain:						
When was the system last pumped? 2017	Name of pumper: Smilie's Sewer Service					
How often pumped in previous years? Every 3	Is system on a monitoring plan? N					
Have you received notices from any government ag						
Is your property located in a shoreland management						
Do you have any additional information that should be given to the new owner? N						

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant: Pat Kuslich's Signature On File

Date: 10/23/2019

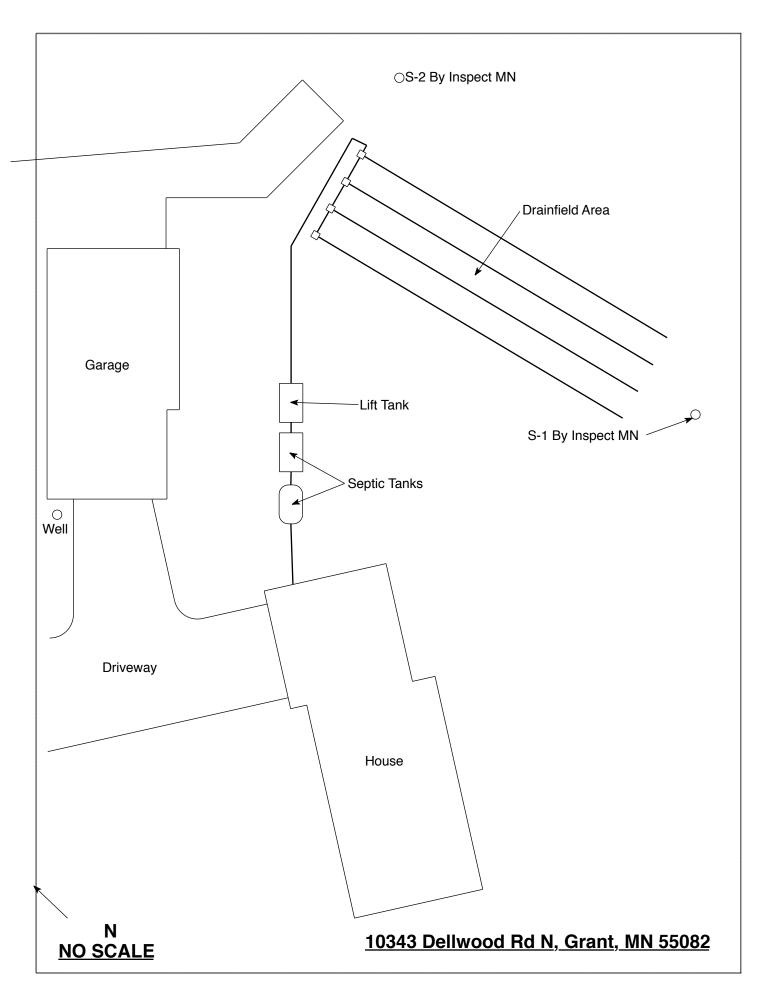

6 of 9

Soil Observations Log

Location of Project: 10343 Dellwood Rd N, Grant, MN 55082								
Ob			Inspect Minnesota					
CI	lassifica	ation System:	USDA					
	Soil	Observation:	1		Soil C	bservation:	2	
Surfa Elevati Observ	on of	-	nd surface as last Tield trench	Surface Elevation of Observation		-	und surface as last infield trench	
Depth In Inches	Rock %	<u>Soils E</u>	ncountered	Depth In Inches	Rock %	<u>Soils</u>	Encountered	
0-14 14-24 24-37 37-45		10YR 3/4 Trace 10YR 3/4 7.5YR 5/8 10YR 10YR 4/4 5 7.5YR 5/8 8	2 Silt Loam Silt Loam With e Of Gravel Silt Loam With , 10YR 6/2, And 7/2 Redox Sandy Loam with & 10YR 7/3 Redox Isal At 43"	0-14 14-30 30-36 36-48	AnchesIsourisSons Encouncered0-1410YR 4/2 Loamy Fine Sand1-3010YR 4/3 Sandy Loam0-3610YR 5/3 Silt Loam (Moist)			
24" l	Depth T	o End Of Soil O	bservation Or Redox	36"	Depth T	o End Of Soil	Observation Or Redox	
Same I	Elevatio	n Of Observatio	n Relative To System	Same	Elevatio	n Of Observal	tion Relative To System	
-40" [Depth T	o Bottom Of Dis	stribution Media	-40"	Depth T	o Bottom Of	Distribution Media	
	Of Sepa			=0"	Of Sepa			
							46.1	
End C		Observation At:	45"	End Of		servation At:	48"	
		lox Present At:	24"			x Present At:	40"	
Stand	Standing Water Present At: None				ng Wate	r Present At:	41" At 15 Minutes	

Bottom Of Distribution Medium At: 40 Inches

Signature:

Other Ula

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing

Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage[®]Treatment Systems Non-transferable Business License

Inspect Minnesota, Midwest Soil Testing

License Expires: 12/22/2019

Issued: 11/20/2018

Specialty Area(s):

License # L2896

Installer Maintainer Service Provider Advanced Designer Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expires:
C9633	Anthony P Scully	3/5/2020
•	Installer, Designer (Apprentice)	
C5342	Brian L Humpal	10/15/2023
	Installer, Maintainer, Serv Prov, Adv De	esigner, Adv Inspector
C9852	Christopher R Uebe	3/4/2021
	Designer, Inspector	

MINNESOTA POLLUTION CONTROL AGENCY

520 Lafayette Road North St. Paul, Minnesota 55155-4194

Nich Haig

Nick Haig, Supervisor Certification and Training Unit



