Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM COMPLIANCE REPORT

Inspection Address: 9077 Justen Trl N, Grant, MN 55082

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, Doug Kovaleski, and have reviewed the original design/permit records on file at Washington County. This very old system (installed in 1987) consists of a pre-cast septic tank and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(D) because of the lack of the required three foot separation between the bottom of the drainfield and seasonally saturated soils. Washington County issued sewage treatment permit #4474 for the installation of this septic system.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact the Washington County Department of Public Health & Environment (651-430-6655) to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:			
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days				
System Status				
System status on date (mm/dd/yyyy): 6/6/2018				
<u> </u>	mpliant – Notice of Noncompliance grade Requirements on page 3)			
Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) – Imminent threat to Other Compliance Conditions (Compliance Component #3) – Imminent the Tank Integrity (Compliance Component #2) – Failing to protect groundwer Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwer Soil Separation (Compliance Component #4) – Failing to protect groundwer Operating permit/monitoring plan requirements (Compliance Component	reat to public health and safety ater rotect groundwater vater			
Property Information Parcel ID# or Sec/Twp/Rar	nge:			
Property address: 9077 Justen Trl N, Grant, MN 55082 Reason	for inspection: Property Transfer phone: 651-426-0309			
Or Ourse's representative:	ntativo nhano			
• • • • • • • • • • • • • • • • • • • •	Representative phone:			
Brief system description: A pre-cast septic tank and a rock trench drainfield.				
Comments or recommendations:				
Certification				
I hereby certify that all the necessary information has been gathered to determine the determination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.				
Inspector name: Brian Humpal Certifica	tion number: L5342			
	nse number: L2896			
Inspector signature: Brian Humpal Ph	one number: 651-492-7550			
Necessary or Locally Required Attachments				
	local ordinance			
☑ Other information (list): Report Summary, Property Information, Disclaimer, Li				

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 1 of 3

Property address: 9077 Justen Trl N, Grant, MN 55082

Inspector initials/Date: 6/6/2018

1.	ln	mpact on Public Health - Compliance component #1 of 5						
	Co	Compliance criteria:			Verification method(s):			
		stem discharge sewage to the bund surface.	☐ Yes ⊠	☑ No	\boxtimes	Searched for surface outlet Searched for seeping in yard/backup in home		
		stem discharge sewage to drain tile surface waters.	☐ Yes 区	☑ No		Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation) "Black soil" above soil dispersal system		
		rstem cause sewage backup into relling or establishment.	☐ Yes 区	☑ No		System requires "emergency" pumping Performed dye test		
		ny "yes" answer above indicates n Imminent Threat to Public Heal			☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)			
		omments/Explanation: one of the above found.						
	INC	one of the above lound.						
•	_							
2.		ank Integrity — Compliance com	ponent #2	of 5				
	Co	ompliance criteria:			Verification method(s):			
		stem consists of a seepage pit, sspool, drywell, or leaching pit.	☐ Yes 🗵	☑ No		Probed tank(s) bottom Examined construction records		
		epage pits meeting 7080.2550 may be				Examined Constituction records Examined Tank Integrity Form (Attach)		
		mpliant if allowed in local ordinance.				Observed liquid level below operating depth		
		ewage tank(s) leak below their signed operating depth.	☐ Yes ⊠	☑ No		Examined empty (pumped) tanks(s)		
		es, which sewage tank(s) leaks:			Probed outside tank(s) for "black soil"			
	Any "yes" answer above indicates the system is Failing to Protect Groundwater.			er.	☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)			
Comments/Explanation:								
	Lowered underwater camera into tank - baffles and tank walls OK.							
3.	Ωŧ	ther Compliance Conditions	Complia	nco componon	+ #2	of 5		
<u>J.</u>		-	-	-				
	a. b.	Maintenance hole covers are damaged Other issues (electrical hazards, etc.) to it				·		
 Other issues (electrical hazards, etc.) to immediately and adversely impact public heal *System is an imminent threat to public health and safety 					passion localities of calcoly.			
	Explain:							
	c. System is non-protective of ground water for other conditions as determined by inspector ☐ Yes* ☐ No *System is failing to protect groundwater				ned by inspector ☐ Yes* ☐ No			
	Explain:							

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Property address: 9077 Justen Trl N, Grant, MN 55082

Inspector initials/Date: 6/6/2018

	Date of installation: 1987	☐ Unkr	nown	Ver	rification method(s):		
	Shoreland/Wellhead protection/Food Beverage Lodging?	⊠ Yes		Soil	observation does not expire. Pervations by two independent p		
	Compliance criteria:				ess site conditions have been al		
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes	□ No		requirements differ. ☐ Conducted soil observation(s) (Attach bo ☐ Two previous verifications (Attach boring ☐ Not applicable (Holding tank(s), no drainfie.		
	Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.				Unable to verify (See Comments/Explanation) Other (See Comments/Explanation)		
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes	⊠ No	Con	nments/Explanation:		
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
	"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV	☐ Yes	□No	Ind	icate depths of elevations		
	or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			A. E	Bottom of distribution media	See Attached Boring Log(s)	
	Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.				Periodically saturated soil/bedrock System separation		
				D. F	Required compliance separation*		
	Any "no" answer above indicates the system is				*May be reduced up to 15 percent if allowed by Local Ordinance.		
	.						
•	Operating Permit and Nitrogen B					licable	
	Is the system operated under an Operating Permit?						
	Is the system required to employ a Nitrogen BMP?						
	BMP=Best Management Practice(s) specified in the system design						
	If the answer to both questions is "no",	this sec	tion does	not ne	ed to be completed.		
	a. Operating Permit number:				☐ Yes ☐ No		
	Have the Operating Permit requirements to						
	b. Is the required nitrogen BMP in place and properly functioning?			,	☐ Yes ☐ No		

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3

WASHINGTON COUNTY, MINNESOTA

Sewage Treatment Permit No. 4474

Inspection of Installation Must Be Made By the Building Offical Before Any Portion of System is Covered Contact Planning Department, 779-5444, 24 Hour Notice Required

Owner KOYALESKI
Property Description Let 3 Blk 2 Victoria Station #5 Sec 15 Grant Turp 83939-2200
Property Address 9077 Justin Trail N., White Bear Lake
Property Address 40 7 105/17/11/11/11/11/11/11/11/11/11/11/11/11/
Use of Building: Shale FAMILY PES Flow Rate: 150 GAL/A4 Percolation Rate: 34 mp
Septic Tank
Type of System: SPRIC TANK AND OFAINFIELD
Absorption Trench — Square Feet 10/200 Lineal Feet 3/0 480 Width
Depth of Rock Below LinesInches, Above LinesInches
Don'th of Trench From Existing Grade — Minimum Inches, Maximum Inches
Recommended Number of Lines 40 100 F1 (Note: Maximum Length of Individual Line is 100 Feet
7 % State Contact
Special Conditions Install system in arra tested and Shoun on site pan.
REMOVAL OF NESPOSAL
PERMIT: Permission is hereby granted to the above named applicant to perform the work described in the application to the minimum specifications shown above and per attached site plan. This permit is granted upon express condition that the person to whom it is granted, and his agents, employees and workmen shall conform in all respect to ordinances of Washington County, Minnesota. This permit may be revoked at any time upon violation of a said ordinance, and permit shall be void if work is not commenced within six (6) months. INSTALLER MUST HOLD CURRENT SEPTIC INSTALLER LICENSE WITH WASHINGTON COUNTY.
Approved:
Comments
Installation Approved Sunsell Constallation Date 12-15-87
Contribution White-Annivant Canady-File Pink-Inspector Goldenrod-Municipality Form 2501 Vists


Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: June 6, 2018	Time: 1:00 PM			
Property Address: 9077 Justen Trl N, Grant, MN	Zip: 55082			
<u> </u>	Phone: 651-426-0309			
Property Owner: Doug Kovaleski Tank(s) Tank(s)Material Soil Treats				
$\begin{array}{ccc} \underline{Tank(s)} & \underline{Tank(s)Material} & \underline{Soil\ Treats} \\ \overline{\bigotimes} Septic\ 1 & \overline{\bigcirc} Fiberglass & \overline{\bigotimes} Rock\ tr \end{array}$	ment System Other ench Alternative system			
	ess trench Experimental system			
	er trench Cesspool system			
☐Holding ☐Concrete ☐Seepag				
Other: Block Mound				
Other At-grad	e			
Are the tank maintenance covers accessible? Yes	⊠ No *If no, proper maintenance must be			
performed through the maintenance holes. Maintenan	ice hole covers should be made accessible to			
the ground surface to facilitate access and proper main				
Year house built: 1987 Year septic installed: 1	987 Tank size (gals.): 1200			
1	Jumber of residents in home? 2-4			
	drained by gravity? Lower Pumped			
	irlpool bath? Y			
More than one system (laundry, etc.)? N	•			
Does this property have any footing drain tiles connec	eted to the septic system? N			
	1			
Are any buildings on this property such as garages or	out-buildings connected to this system? N			
	E ,			
Are there any additional systems on this property serv	ing other buildings? N			
Location of septic system on lot? East Side				
Location of water well on lot? South Side	Is the well a deep well? Y			
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups,				
surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made				
to the system? N If yes, explain:				
When was the system last pumped? 2014	Jame of pumper: Pinky's Sewer Service			
How often pumped in previous years? Every 3				
Have you received notices from any government agency concerning this system? N				
Is your property located in a shoreland management area? N				
Do you have any additional information that should be given to the new owner? N				

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant: Doug Kovaleski's Signature On File Date: 6/6/2018

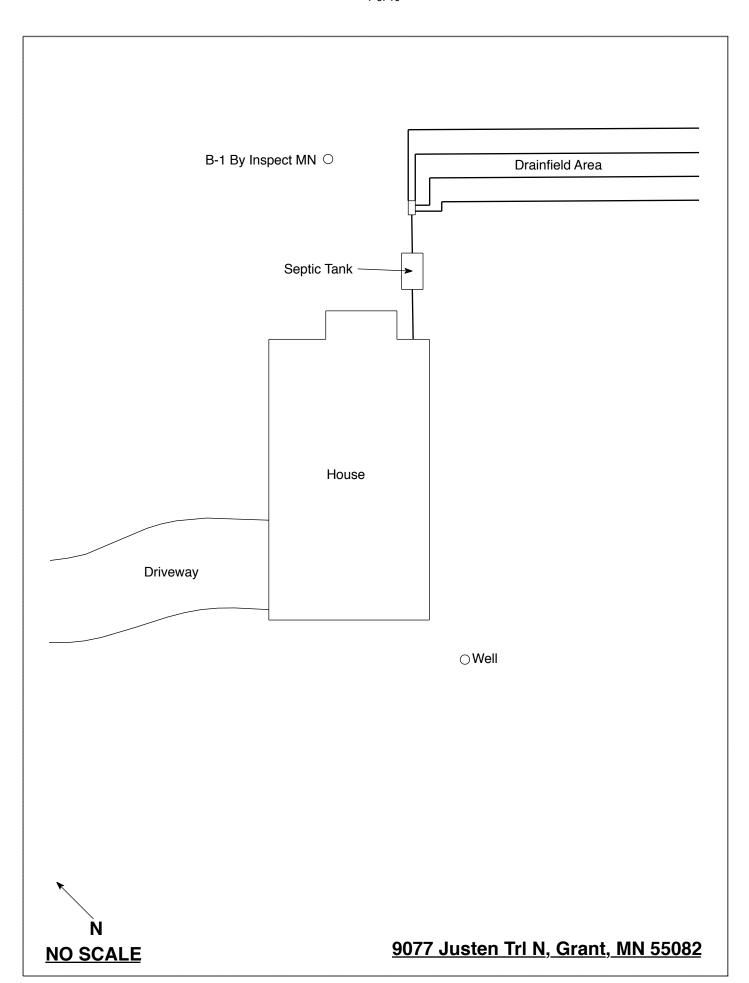

Log Of Soil Borings

Location of Project: 9077 Justen Trl N, Grant, MN 55082					
Borings Made By: Inspect Minnesota			Date:		6/6/18
Auger Used: Hand/Bucket			Classi	ification System:	USDA
Вог	ring Number:	1		Boring Number:	
Surface Same ground surface as last		Surface Elevation Boring			
Depth In Inches	Soils E	ncountered	Depth In Inches	Soils Er	ncountered_
0-33 33-40 40-48 48-60	10YR 3/4 F 10YR 3 10YR 3/6	ine Sandy Loam ine Sandy Loam /6 Silt Loam Silt Loam With 10YR 6/2 Redox			
48" Dep	oth To End Of B	oring Or Redox		Depth To End Of Bo	oring Or Redox
Same Elevation Of Boring Relative To System			Elevation Of Boring	Relative To System	
-37" Depth To Bottom Of Distribution Media				of Distribution Media	
=11" Of Separation			Of Separation		
Fnc	d Of Boring At:	60"		End Of Boring At:	
	lox Present At:	48"		Redox Present At:	
Standing Water Present At: None				Water Present At:	

Bottom Of Distribution Medium At: 37 Inches	

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems Non-transferable Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2018

Issued: 10/10/2017

es:

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expir		
C9633	Anthony P Scully	7/28/2018		
	Installer, Designer (Conditional)			
C5342	Brian L Humpal	10/15/2020		
	Installer, Maintainer, Serv Prov,	Adv Designer, Adv Inspector		
C9852	Christopher R Uebe	3/4/2018		
	Designer, Inspector			



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Charles & Thompson

Charles K Thompson, Supervisor Certification & Training Unit