Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 1109 Norell Ave N, West Lakeland, MN 55082

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, Bruce Thordson, and have reviewed the original design/permit records, along with the previous compliance inspections from 2007, which was on file at Washington County. This very old system (installed in 1988) consists of a pre-cast two-compartment septic tank and a rock trench drainfield. It should be noted that the average life expectancy of a septic system is approximately 30 years.

Although not a compliance criteria, it should be noted that the septic tank manhole covers are buried. I recommend extending these covers to the ground surface to facilitate easier access and proper maintenance.

Predicated on my inspection of the system, my review of the history of the system with the owner, and my review of the records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Christopher Uebe

Brian Humpal

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

	,			
Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply. Submit completed form to Local Unit of Government (LUG) and system owner within 15 days	For local tracking purposes:			
William 10 days				
System Status				
System status on date (mm/dd/yyyy):9/24/2018				
· · · · · · · · · · · · · · · · · · ·	mpliant – Notice of Noncompliance grade Requirements on page 3)			
Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) – Imminent threat to Other Compliance Conditions (Compliance Component #3) – Imminent this Tank Integrity (Compliance Component #2) – Failing to protect groundwa Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwa Soil Separation (Compliance Component #4) – Failing to protect groundwa Operating permit/monitoring plan requirements (Compliance Component)	reat to public health and safety ter otect groundwater vater			
Property Information				
Property Information Parcel ID# or Sec/Twp/Ran Property address: 1109 Norell Ave N, West Lakeland, MN 55082 Reason f	ge: or inspection: Property Transfer			
	phone: 651-373-7587			
or				
Owner's representative: Represen	ntative phone:			
Local regulatory authority: Washington County Regulato	Regulatory authority phone: 651-430-6655			
Brief system description: A pre-cast two-compartment septic tank and a rock trench	drainfield.			
Comments or recommendations: Although not a compliance criteria, it should be noted that the septic tank manhole cov covers to the ground surface to facilitate easier access and proper maintenance.	ers are buried. I recommend extending these			
Certification				
I hereby certify that all the necessary information has been gathered to determine the determination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.				
Inspector name: Brian Humpal/Christopher Uebe Certificat	ion number: <u>C5342/C9852</u>			
	nse number: L2896			
Inspector signature: Brian Humpal for the Pho	one number: 651 402 7550			
Inspector signature: Pho	one number: 651-492-7550			
Necessary or Locally Required Attachments				
· · · · · ·	local ordinance			
☐ Other information (list): Report Summary, Property Information, Disclaimer, License				

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 1 of 3

Property address: 1109 Norell Ave N, West Lakeland, MN 55082

Inspector initials/Date: 9/24/2018

1.	ln	npact on Public Health – Cor	npliance	componen	t #1 of 5			
	Sy	ompliance criteria:	☐ Yes	⊠ No	\boxtimes	erification method(s): Searched for surface outlet		
	ground surface. System discharge sewage to drain tile or surface waters. System cause sewage backup into dwelling or establishment. □ Yes □ No		☐ Yes	⊠ No		Searched for seeping in yard/backup in home Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation)		
				"Black soil" above soil dispersal system System requires "emergency" pumping Performed dye test				
	Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.				☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)			
		omments/Explanation: one of the above found.						
2.	Ta	ank Integrity – Compliance com	ponent	#2 of 5				
	C	ompliance criteria:			Ve	rification method(s):		
	•	stem consists of a seepage pit, sspool, drywell, or leaching pit.	☐ Yes	⊠ No	\boxtimes	Probed tank(s) bottom Examined construction records		
		epage pits meeting 7080.2550 may be mpliant if allowed in local ordinance.				Examined Tank Integrity Form (Attach) Observed liquid level below operating depth		
		ewage tank(s) leak below their signed operating depth.	☐ Yes	⊠ No		Examined empty (pumped) tanks(s)		
	lf y	yes, which sewage tank(s) leaks:				Probed outside tank(s) for "black soil"		
	Any "yes" answer above indicates the system is Failing to Protect Groundwater.				 ☐ Unable to verify (See Comments/Explanation) ☑ Other methods not listed (See Comments/Explanation) 			
	Comments/Explanation: Lowered underwater camera into tanks - baffles and tank walls OK. Although not a compliance criteria, it should be noted that the septic tank manhole covers are buried. I recommend extendir these covers to the ground surface to facilitate easier access and proper maintenance.							
<u>3.</u>	01	ther Compliance Conditions			•			
	a. h	Maintenance hole covers are damaged				•		
	 b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☐ No *System is an imminent threat to public health and safety 					public reality of safety. Tes No Onknown		
		Explain:						
	C.	System is non-protective of ground wa *System is failing to protect ground		er conditions	as determi	ned by inspector ☐ Yes* ☒ No		
	Explain:							

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

rop	perty address: 1109 Norell Ave N, West Lakela	Inspector initials/Date: 9	124/2018 BH ()				
1. Soil Separation — Compliance component #4 of 5							
	Date of installation: 1988 Shoreland/Wellhead protection/Food Beverage Lodging? Compliance criteria:	Ilhead protection/Food Beverage ☐ Yes ☐ No Soil observation does observations by two		erification method(s): oil observation does not expire. It is a servations by two independent pless site conditions have been a	parties are sufficient,		
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.	⊠ Yes □ No	requirements differ. ☐ Conducted soil observation(s) (Ai ☐ Two previous verifications (Attact ☐ Not applicable (Holding tank(s), no ☐ Unable to verify (See Comments/E ☐ Other (See Comments/Explanation)		ach boring logs) no drainfield) s/Explanation)		
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes ☐ No	Re	omments/Explanation: eviewed previous compliance inserviewed design and permit recor	•		
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
	"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)	☐ Yes ☐ No	A. Bottom of distribution media		See Attached Boring Log(s)		
	Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.			Periodically saturated soil/bedrock System separation			
_	Any "no" answer above indicates the Failing to Protect Groundwater.	Required compliance separation* May be reduced up to 15 percent ordinance.	·				
5.	Operating Permit and Nitrogen Balls the system operated under an Operating Peri	·		onent #5 of 5 Not ap			
	Is the system required to employ a Nitrogen BM			If "yes", B below is required			
	BMP=Best Management Practice(s) specified in the system design						
	If the answer to both questions is "no", this section does not need to be completed.						
	Compliance criteria						
	a. Operating Permit number: Have the Operating Permit requirements been met?			☐ Yes ☐ No			
	b. Is the required nitrogen BMP in place and	•	☐ Yes ☐ No				
	Any "no" answer indicates Noncompliance.						

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • wq-wwists4-31 • 1/24/12 Page 3 of 3


Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: September 24, 2018	Time: 1:00 PM				
Property Address: 1109 Norell Ave N, West Lakeland, MN	Zip: 55082				
Property Owner: Bruce Thordson	Phone: 651-373-7587				
Tank(s) Tank(s)Material Soil Treatment Sy Septic 2 Comp Fiberglass Septic Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding Concrete Seepage bed Other: Block Mound Other At-grade	Alternative system ch				
Are the tank maintenance covers accessible? Yes No performed through the maintenance holes. Maintenance holes the ground surface to facilitate access and proper maintenance holes.	le covers should be made accessible to				
Year house built: 1988 Year septic installed: 1988	Tank size (gals.): 1650 2-Comp				
How long has seller owned the property? 1988 Number	r of residents in home? 1-4				
Number of bedrooms? 3 Are all floors drained	d by gravity? Y				
Garbage disposal? Y Whirlpool	bath? Y				
More than one system (laundry, etc.)? N					
Does this property have any footing drain tiles connected to the septic system? N Are any buildings on this property such as garages or out-buildings connected to this system? N					
Are there any additional systems on this property serving of	her buildings? N				
Location of septic system on lot? Northeast Side					
Location of water well on lot? West Side	Is the well a deep well? Y				
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? N If yes, explain:					
When was the system last pumped? 2015 Name of	of pumper: Meyer Sewer Service				
How often pumped in previous years? Every 3 Is system on a monitoring plan? N					
Have you received notices from any government agency concerning this system? N					
Is your property located in a shoreland management area? N					
Do you have any additional information that should be given to the new owner? N					

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant: Bruce Thordson's Signature On File Date: 9/24/2018

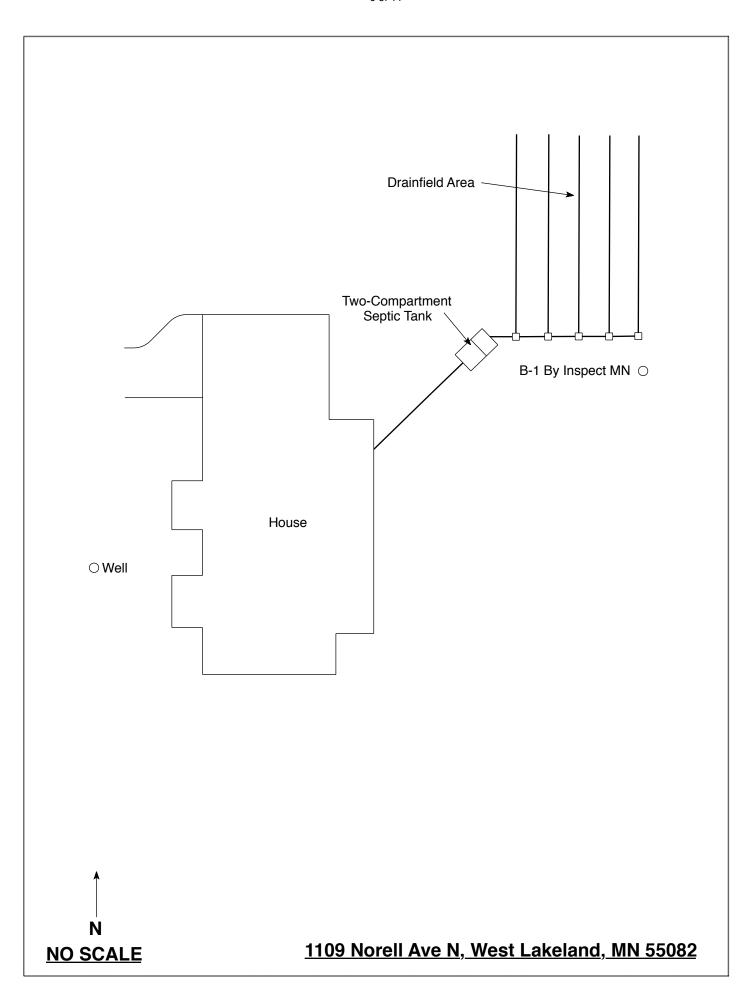

Log Of Soil Borings

Location of Project: 1109 Norell Ave N, West Lakeland, MN 55082					
Borings Made By: Inspect Minnesota					9/24/18
Auger Used: Hand/Bucket			Class	ification System:	<i>'</i>
	Boring Number:	1		Boring Number:	
Surface Elevation Boring	of Same grou	und surface as last nfield trench	Surface Elevation Boring		
Depth In Inches	Soils E	ncountered	Depth In Inches	Soils E	ncountered
0-17 25-41 41-74	Soils Encountered 10YR 2/2 Loamy Sand 10YR 4/3 Loamy Sand With Gravel ≈15% Rock Fragments 10YR 3/4 Medium Sand With Few Fine Sand Layers And Gravel ≈20% Rock Fragments Refusal At 74"				
74"	Depth To End Of B	oring Or Redox		Depth To End Of B	oring Or Redox
Same	ne Elevation Of Boring Relative To System			Elevation Of Borin	g Relative To System
-37" Depth To Bottom Of Distribution Media					Of Distribution Media
≥37"	Of Separation			Of Separation	
End Of Borina At: 74"				End Of Boring At-	I
3				End Of Boring At: Redox Present At:	
Redox Present At: Same			Standing	Water Present At:	
Standing Water Present At: Same			Standing	water riesent At.	

Bottom Of Distribution Medium At: 37 Inches	

Log Of Soil Borings

Loca	tion of Project:	1100 Novell Ave. At. M.				
Bo	rings Made Ry	1109 Norell Ave. N., W	est Lakelar			
30.	Borings Made By: Inspect Minnesota Auger Used: Hand/Bucket		Class		te: 11/7/07	
	oring Number:		Lias	sification Syste		
		<u> </u>		Boring Numb	er:	
. Surface		Top Of Ground At	Surface			
Elevation of	Beginning	Of Last Drainfield	Elevation			
Boring		Trench	Boring			
Depth In	Soils E	ncountered	Depth In	Soils	Encountered	
Inches 0-14		3 Loamy Sand	Inches		<u> </u>	
14-60		amy Sand & Gravel				
		Sand Trace Of Gravel				
1	•			!		
			1			
i i						
	·					
1						
<u> </u>						
İ						
ļ		İ				
78" Depth To End Of Boring Or Mottled Soils		oring Or Mottled Soils		Depth To End Of	Boring Or Mottled S	oils
Same Elevation Of Boring Relative To System					ing Relative To Syste	m
-42" Depth To Bottom Of System		f System		Depth To Botton	of System	
>/=36" U[>/=36" Of Separation			Of Separation		
Fn	d Of Boring At:	78"		End Of Boring A	\f•	
	Soil Present At:	None	Mottle			
		None	Mottled Soil Present At: Standing Water Present At:			
Junioning We	Standing Water Present At: None Standing Water Present At:					

Bottom Of Distribution	Medium At:	42	Inches

LOG OF SOIL BORINGS

EAA OF JOIL DOUINGS							
	BORING NO. / BORING NO. &			BOR		BORI	NG NO. 4
DEPTH	CESCHIPTION	DEPTH IN PEET	SOIL DESCRIPTION	SEPTH IN FEET	SOIL NOITHINDESC	DEPTH IN FEET	SOIL DESCRIPTION
0	DACK ISHOW4	0	BACK Browns	0	PARE SHOWN	0	DAEK BROWN
	FIND SAYOY		Lieb savep		SAMAY GAM		RING SANOY
	comm	-	com_		4 FOCKS		com -
<u></u>	4. each		Kacus				peoess !
	1						
5"	·	_5"		4"			
		3			Brown . KCO	5	
	Brown Fine Sandy Cipy		Brown sinc.		Smay Low		Brownsie
	COANL		- Mco. Lanny SMO.		Rocks		sawy emy
	Roses !		rocses		GANCL		KOCE5
				16"			
10					ELO B-ow4		
	4. 164 Graves				Fire · MCO.		
	Fire - Mes				5440	₽9	
-	Thus- Rocks				GANEL		KEOBOUWY
	Graver						sonoy come
				38"			4 Kocks
					Brawn sina .		1
35"		25"			- MEO. 5240		
	- בנות הישפים		KED G-1W41		Gravel		İ
	- 446 27		SAWAY COME		1 1		
	5441.		4 KOCKS				
	Roins						
	,			60			
					4T. 8 - 1 W-1	7:0"	
					File - Maa		Banes Sassy
) L		5440-	1	Loim -
-					Gravel		KOCKS
					L		
			1 1		1 1		1
	1 1						
Ţ .	1 1	1	1 1	Į	1 1	1	l

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems Non-transferable Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2018

Issued: 10/10/2017

es:

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expir		
C9633	Anthony P Scully	7/28/2018		
	Installer, Designer (Conditional)			
C5342	Brian L Humpal	10/15/2020		
	Installer, Maintainer, Serv Prov,	Adv Designer, Adv Inspector		
C9852	Christopher R Uebe	3/4/2018		
	Designer, Inspector			



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Charles & Thompson

Charles K Thompson, Supervisor Certification & Training Unit