Inspect Minnesota & Midwest Soil Testing					
P.O. Box 383 Hugo, N	AN 55038	Brian Humpal			
651-492-7550/Brian@midw	estsoiltesting.com	MPCA Licensed Designer & Inspector			
SUBSURFACE SEWAG	E TREATMENT S	SYSTEM COMPLIANCE REPORT			
Date: July 28, 2016	Time: 9:00 AN	A Owner: Kurt Legred			
Inspection Address: 9430 96th St N, Grant, MN 55110					
REPORT SUMMARY					

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, Spencer Legred (Son), and have reviewed the original design/permit records on file at Washington County. This older system (installed in 1987) consists of a pre-cast septic tank, pre-cast lift tank, and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(E) because of the lack of the required two foot separation between the bottom of the drainfield and seasonally saturated soils. This system is not an imminent threat to public health or safety per MPCA rule 7080.1500 Subp. 4(A). Washington County issued sewage treatment permit #4273 for the installation of this septic system.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact Washington County Environmental Specialist, Mr. Chris LeClair (651-430-4052), to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal Brian Humpal

Minnesota Pollution Control Agency 520 Lafayette Road North St. Paul, MN 55155-4194	-	mpliance Inspection Form g Subsurface Sewage Treatment Systems (SSTS) Doc Type: Compliance and Enforcement			
Instructions: Inspection results based on Minnesota requirements and attached forms – additional local re	5,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	For local tracking purposes:			
Submit completed form to Local Unit of Governi within 15 days	ment (LUG) and system owner				
System Status					
System status on date (mm/dd/yyyy):7/2	oliance 🛛 Noncon	npliant – Notice of Noncompliance rade Requirements on page 3)			
Reason(s) for noncompliance (check a Impact on Public Health (Compliance C Other Compliance Conditions (Complia Tank Integrity (Compliance Component	Component #1) – Imminent threat to nce Component #3) – Imminent thr	eat to public health and safety			

Soil Separation (Compliance Component #4) – Failing to protect groundwater

Operating permit/monitoring plan requirements (Compliance Component #5) – Noncompliant

Property Information

Parcel ID# or Sec/Twp/Range:

Property address:	9430 96th St N, Grant, MN 55110	Reason for inspection: Property Sale
Property owner:	Kurt Legred	Owner's phone:
or		
Owner's represent	ative:	Representative phone:
Local regulatory a	uthority: Washington County	Regulatory authority phone: 651-430-4052
Brief system descr	iption: Pre-cast septic tank, pre-cast lift tan	ık, and rock trench drainfield.
Commonte or roce	mmendations:	

Comments or recommendations:

Certification

I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage.

Inspector name:	Brian Humpal	Certification number:	L5342
Business name:	Inspect Minnesota, Midwest Soil Testing	License number:	L2896
Inspector signatur	e: Brian Humpal	Phone number:	651-492-7550

Necessary or Locally Required Attachments

🛛 Soil boring logs	🛛 System/As-built drawing	Forms per local ordinance
Other information (list):	Report Summary, Property Informa	ation, Disclaimer, License

1. Impact on Public Health – Compliance component #1 of 5

Compliance criteria: System discharge sewage to the ground surface. System discharge sewage to drain tile or surface waters. System cause sewage backup into dwelling or establishment.

Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.

Comments/Explanation:

None of the above found.

Verification method(s):

- Searched for surface outlet
- Searched for seeping in yard/backup in home
- Excessive ponding in soil system/D-boxes
- Homeowner testimony (See Comments/Explanation)
- "Black soil" above soil dispersal system
- System requires "emergency" pumping
- Performed dye test
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

2. Tank Integrity - Compliance component #2 of 5

Compliance criteria:

System consists of a seepage pit, cesspool, drywell, or leaching pit.	🗌 Yes	🛛 No
Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.		
Sewage tank(s) leak below their designed operating depth.	🗌 Yes	🛛 No
If yes, which sewage tank(s) leaks:		

Any "yes" answer above indicates the system is Failing to Protect Groundwater.

Comments/Explanation:

Lowered underwater camera into tanks - baffles and tank walls OK. Lift pump and alarm were opertional at the time of the inspection.

Verification method(s):

- Probed tank(s) bottom
- Examined construction records
- Examined Tank Integrity Form (Attach)
- Observed liquid level below operating depth
- Examined empty (pumped) tanks(s)
- Probed outside tank(s) for "black soil"
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

3. Other Compliance Conditions - Compliance component #3 of 5

a.	Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound.	□ Yes*	🖾 No	Unknown

b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ⊠ No ☐ Unknown *System is an imminent threat to public health and safety

Explain:

c. System is non-protective of ground water for other conditions as determined by inspector □ Yes* ⊠ No *System is failing to protect groundwater

Explain:

4. Soil Separation – Compliance component #4 of 5

Date of installation: 1987	Unknown	Verification method(s):
Shoreland/Wellhead protection/Food Beverage Lodging?	🗌 Yes 🖾 No	Soil observation does not expire. Previous soil observations by two independent parties are suffici
Compliance criteria:		unless site conditions have been altered or local
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	🗌 Yes 🖾 No	 requirements differ. Conducted soil observation(s) (Attach boring logs Two previous verifications (Attach boring logs) Not applicable (Holding tank(s), no drainfield)
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.		 Unable to verify (See Comments/Explanation) Other (See Comments/Explanation)
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes ☐ No	Comments/Explanation:
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*		
"Experimental", "Other", or "Performance"	🗌 Yes 🗌 No	Indicate depths of elevations
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)		A. Bottom of distribution media Boring Log(
Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.		B. Periodically saturated soil/bedrock C. System separation
		D. Required compliance separation*
Any "no" answer above indicates the Failing to Protect Groundwater.	he system is	*May be reduced up to 15 percent if allowed by Loo Ordinance.
Operating Permit and Nitrogen B	MP* – Complian	nce component #5 of 5 🛛 🛛 Not applicable
Is the system operated under an Operating Per		s ⊠ No If "yes", A below is required
Is the system required to employ a Nitrogen BN		s ⊠ No lf "yes", B below is required
BMP=Best Management Practice(s) specifi		
If the answer to both questions is "no",	this section doe	es not need to be completed.
Compliance criteria		
a. Operating Permit number:		
		🗌 Yes 🔲 No

Any "no" answer indicates Noncompliance.

Have the Operating Permit requirements been met?

b. Is the required nitrogen BMP in place and properly functioning?

Upgrade Requirements (*Minn. Stat.* § 115.55) *An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.*

☐ Yes ☐ No

Inspect Minnesota & Midwest Soil Testing

Subsurface Sewage Treatment System Owner/Property Information


This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: July 28, 2016	Time: 9:00 AM					
Property Address: 9430 96th St N, Grant, MN	Zip: 55110					
Property Owner: Kurt Legred	Phone: 651-503-3896					
Tank(s) Tank(s)Material Soil Treatment System Septic 1 Fiberglass Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding Concrete Seepage bed Other: Block Mound Other At-grade	Other Alternative system Experimental system Cesspool system Other system					
Are the tank maintenance covers accessible? Yes No *If performed through the maintenance holes. Maintenance hole cov the ground surface to facilitate access and proper maintenance of	ers should be made accessible to					
1	Tank size (gals.): 1200					
	esidents in home? 4					
Number of bedrooms? 4 Are all floors drained by g						
Garbage disposal? Y Whirlpool bath?	? N					
More than one system (laundry, etc.)? N						
Does this property have any footing drain tiles connected to the set Are any buildings on this property such as garages or out-building						
Are there any additional systems on this property serving other bu	uildings? N					
Location of septic system on lot? East Side						
	e well a deep well? Y					
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? Y If yes, explain:2014, Replaced lift pump and installed alarm.						
	per: Pinky's Sewer Service					
How often pumped in previous years? Every 3 Is system	n on a monitoring plan? N					
Have you received notices from any government agency concerning this system? N						
Is your property located in a shoreland management area? N						
Do you have any additional information that should be given to the	ne new owner? N					

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant: Spencer William Legred's Signature On File (Son)

Date: 7/28/2016

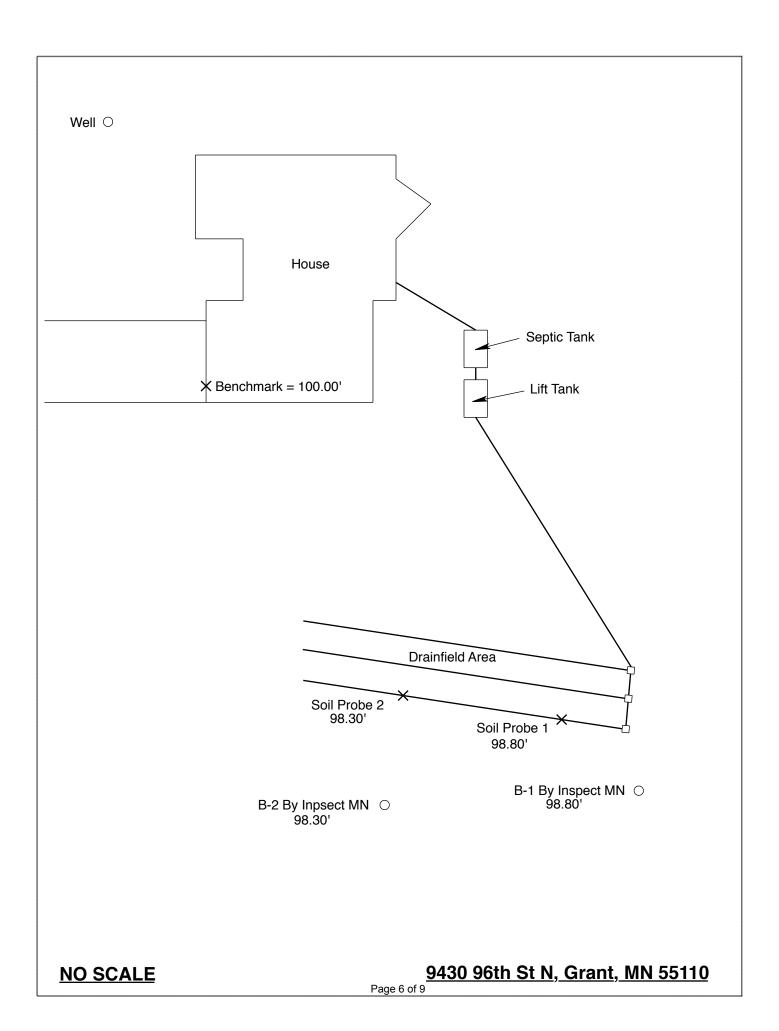

Log Of Soil Borings

Borings Made By: Inspect Minnesota Date: 7/28/16 Auger Used: Hand/Bucket Classification System: USDA Surface 98.80' Surface 2 Elevation of Boring Benchmark = 100.00' at garage Elevation of Boring 98.30' 98.30' Depth In Inches Soils Encountered Depth In Inches Soils Encountered Depth In Inches Soils Encountered Depth In Inches Soils Countered 0-23 10YR 3/3 Loamy Fine Sand 0-17 10YR 3/3 Loamy Fine Sand 10YR 4/3 Loamy Fine Sand 10YR 4/3 Loamy Fine Sand 39-47 10YR 3/3 Loamy Fine Sand Mith 10YR 3/3 Loamy Fine Sand With 34-52 10YR 4/4 Lamellae Banding 39-47 10YR 4/3 Loamy Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 & IOYR 6/3 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox PS.97' Elevation To Bottom Of Distribution Media 95.38' Elevation To Bottom Of Distribution Media 95.97' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox 96.38' End Of Boring At: 66'' End Of	Location of Project: 9430 96th St N, Grant, MN 55110								
Auger Used: Hand/Bucket Classification System: USDA Boring Number: 1 Boring Number: 2 Surface Elevation of Boring Benchmark = 100.00' at garage overhead door threshold Surface Elevation of Boring Soils Encountered Surface Depth In Inches Soils Encountered Depth In Inches Soils Encountered Depth In Inches Soils Encountered IOYR 3/3 Loamy Fine Sand 0-17 10YR 4/3 Loamy Fine Sand 10YR 4/3 Loamy Fine Sand 017 10YR 4/3 Loamy Fine Sand 10YR 4/3 Loamy Fine Sand 7.5YR 4/4 Loamy Fine Sand 7.5YR 5/8 & IOYR 6/1 Redox 39-47 10YR 4/3 Lamellae Banding 10YR 3/3 Lamellae Banding And 7.5YR 5/8 & IOYR 6/1 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 95.97' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.55' Depth To Redox Or End Of Boring 95.57' Depth To Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.97' Elevation To Bottom Of Distribution Media 95.57' 06 porting At: 95.57' 52'' 96.33'10'''Of Separation =0.5'/e''' Of Boring At: 95.57'									
Surface Elevation of Boring 98.80' Benchmark = 100.00' at garage overhead door threshold Surface Elevation of Boring Surface Elevation of Boring Depth In Inches Soils Encountered Depth In Inches Soils Encountered 0-23 10YR 3/3 Loamy Fine Sand With 10YR 3/3 Lamellae Banding 0-17 10YR 4/3 Joamy Fine Sand 39-47 10YR 4/3 Loamy Fine Sand With 10YR 3/3 Lamellae And 7.5YR 5/8 & 10YR 6/1 Redox 04-17 10YR 4/4 Loamy Fine Sand With 10YR 3/3 Lamellae And 7.5YR 5/8 & 10YR 6/1 Redox 47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Elevation To Bottom Of Distribution Media 95.47' 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Depth To Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Depth To Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Depth To Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Depth To Redox 96.39'/0'' Of Separation =0.5'/6'' Of Separation 52''''''''''''''''''''''''''''''''''''		Auger Used:	Hand/Bucket	Class	ification System:	USDA			
Elevation of Boring Benchmark = 100.00' at garage overhead door threshold Elevation of Boring 98.30' Depth In Inches Soils Encountered Depth In Inches Soils Encountered Inches 0-23 10YR 3/3 Loamy Fine Sand 0-17 10YR 3/3 Loamy Fine Sand 10YR 4/3 Loamy Fine Sand 39-47 10YR 4/3 Loamy Fine Sand With 10YR 3/3 Lamellae Banding 34-52 10YR 4/4 Loamy Fine Sand With 10YR 3/3 Lamellae Banding 34-52 39-47 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 6/3 Loamy Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 95.97' Elevation To Bottom Of Distribution Media 95.55' 95.97' 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Depth To Redox =0.5'/6'' 0f Separation 95.35' Depth To Redox Or End Of Boring =0.83'/10'' Of Separation 66'' End Of Boring At: 39''.95.55' 52'' Redox Present At: 39''.95.55'	B	oring Number:	1		Boring Number:	2			
Boring overhead door threshold Boring Depth In Inches Soils Encountered Depth In Inches Soils Encountered 0-23 10YR 3/3 Loamy Fine Sand 0-17 10YR 3/3 Loamy Fine Sand 30-33 10YR 4/3 Fine Sand With 10YR 3/3 Lamellae Banding 39-47 10YR 4/3 Loamy Fine Sand With 10YR 3/3 Lamellae Banding 10YR 6/3 Fine Sand With 10YR 6/3 Fine Sand With 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 & Tork 6/1 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 7.5YR 5/8 New 10YR 6/3 Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.97' 97.05'/6'' Of Separation	Surface		98.80'	Surface	9				
Depth In Inches Soils Encountered Depth In Inches Soils Encountered 0-23 10YR 3/3 Loamy Fine Sand 0-17 10YR 3/3 Loamy Fine Sand 23-39 10YR 3/3 Lamellae Banding 34-52 10YR 4/3 Loamy Fine Sand 39-47 10YR 3/3 Lamellae Banding 34-52 10YR 4/4 Loamy Fine Sand With 10YR 3/3 Lamellae Banding 7.5YR 5/8 & 10YR 6/1 Redox 7.5YR 5/8 & 10YR 6/3 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 7.5YR 5/8 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 96.38' Elevation To Bottom Of Distribution Media 95.97' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox OF End Of Boring 95.47' Depth To Redox =0.83/10'' Of Separation =0.5'/6''' Of Separation =0.5'/6''' Of Separation	Elevation of	Benchmark =	= 100.00' at garage	Elevation	of	98.30'			
Inches Soils Encouncered Inches Soils Encouncered 0-23 10YR 3/3 Loamy Fine Sand 0-17 10YR 3/3 Loamy Fine Sand 23-39 10YR 4/3 Fine Sand With 17-34 10YR 4/3 Loamy Fine Sand With 39-47 10YR 4/3 Loamy Fine Sand With 34-52 10YR 4/4 Loamy Fine Sand With 10YR 3/3 Lamellae Banding 34-52 10YR 4/4 Loamy Fine Sand With 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 96.38' Elevation To Bottom Of Distribution Media 95.97' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox 96.38' Elevation To Bottom Of Distribution Media 95.97' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.5'/6'' 95.37'/10''Of Separation =0.5'/6'' Of Separation =0.5'/6'' S2'' End Of Boring At: 66'' </td <td></td> <td>overhead</td> <td>door threshold</td> <td></td> <td></td> <td></td>		overhead	door threshold						
Incres		Soils Er	ncountered		Soils E	ncountered			
23-39 10YR 4/3 Fine Sand With 10YR 3/3 Lamellae Banding 17-34 10YR 4/3 Loamy Fine Sand With 10YR 3/3 Lamellae And 39-47 10YR 4/3 Loamy Fine Sand With 10YR 3/3 Lamellae And 34-52 10YR 4/4 Loamy Fine Sand With 10YR 6/3 Fine Sand With 10YR 6/3 Fine Sand With 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.97' Elevation To Bottom Of Distribution Media 95.47' 95.97' Elevation To Bottom Of Distribution Media 95.47' 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Depth To Redox Or End Of Boring 95.47' 95.47' Depth To Redox 95.52' End Of Boring At: 66'' End Of Boring At: 52'' S2'' End Of Boring At: 66'' End Of Boring At: 52''									
39-47 10YR 3/3 Lamellae Banding 10YR 3/3 Lamellae And 7.5YR 5/8 & 10YR 6/1 Redox 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 34-52 10YR 4/4 Loamy Fine Sand With 7.5YR 4/4 Lamellae Banding 7.5YR 5/8 & Few 10YR 6/3 Redox 47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 7.5YR 5/8 & Few 10YR 6/3 Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.97' Elevation To Bottom Of Distribution Media 95.47' 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' Depth To Redox =0.5'/6'' 96.38' Elevation To Bottom Of Distribution Media 95.55' 95.47' 96.38' Elevation To Redox Or End Of Boring =0.83'/10'' Of Separation 95.47' 96.38' Elevation To Redox Or End Of Boring =0.5'/6'' 95.47' 95.55' End Of Boring At: 52'' Separation									
39-47 10YR 4/3 Loamy Fine Sand With 10YR 3/3 Lamellae And 7.5YR 5/8 & IOYR 6/3 Redox 47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 96.38' Elevation To Bottom Of Distribution Media 95.55' 96.38' Elevation To Bottom Of Distribution Media 95.55' 96.38' Elevation To Bottom Of Distribution Media 95.55' 0 Depth To Redox Or End Of Boring =0.83'(10') Of Separation 0 Few 7.55/6' End Of Boring At: 66'' End Of Boring At: 66'' End Of Boring At: 39''/95.55' Redox Present At: 39''/95.55'	23 35								
47-66 7.5YR 5/8 & 10YR 6/1 Redox 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox Image: Construction of the second se	39-47	10YR 4/3 Loar	ny Fine Sand With		7.5YR 4/4 L	amellae Banding			
47-66 10YR 6/3 Fine Sand With 10YR 3/4 Lamellae Banding And Few 7.5YR 5/8 Redox 96.38' Elevation To Bottom Of Distribution Media 95.35' Depth To Redox Or End Of Boring 95.55' Depth To Redox Or End Of Boring 95.55' 95.47' 96.38' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.57' 95.47' 96.38' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.57' 95.47' 96.38' Elevation To Bottom Of Distribution Media 95.57' Depth To Redox Or End Of Boring 95.47' Depth To Redox 97.47' Depth To Redox 95.47' 97.47' Depth To Redox		-			7.5YR 5/8 & F	ew 10YR 6/3 Redox			
96.38' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.55' Depth To Redox Or End Of Boring 95.83'/10'' Of Separation End Of Boring At: 66'' End Of Boring At: 64''	17-66								
96.38' Elevation To Bottom Of Distribution Media 95.5' Depth To Redox Or End Of Boring 95.5' Depth To Redox Or End Of Boring 95.38' Elevation To Bottom Of Distribution Media 95.5' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.51/6'' Of Separation =0.51/6'' Of Separation End Of Boring At: 66'' End Of Boring At: 66'' End Of Boring At: 39"/95.55' Redox Present At: 39"/95.55'	47-00								
96.38' Elevation To Bottom Of Distribution Media 95.97' Elevation To Bottom Of Distribution Media 95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
95.55' Depth To Redox Or End Of Boring 95.47' Depth To Redox =0.83'/10" Of Separation =0.5'/6" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"									
=0.83'/10" Of Separation End Of Boring At: 66" End Of Boring At: 52" Redox Present At: 39"/95.55' Redox Present At: 34"						Of Distribution Media			
End Of Boring At:66"End Of Boring At:52"Redox Present At:39"/95.55'Redox Present At:34"									
Redox Present At: 39"/95.55' Redox Present At: 34"	=0.83 ⁻ /10 ⁻ 0f	Separation		=0.5'/6"	Of Separation				
Redox Present At: 39"/95.55' Redox Present At: 34"	Fr	nd Of Boring At	66"		End Of Boring At.	52"			
	5								
			None						

Bottom Of Distribution Medium At: 29" Or Elevation 96.38' At Soil Probe 1 Bottom Of Distribution Medium At: 28" Or Elevation 95.97' At Soil Probe 2

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing

Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems



Non-transferable

License # L2896

Date of Issuance: Maintainer License Expires: Installer License Expires: Adv Inspector License Expires: Adv Designer License Expires:

Oct 28, 2015 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016

Inspect Minnesota, Midwest Soil Testing

Designated Certified Individual (DCI)	Brian L. Humpal	Christopher R. Uebe	Christopher R. Uebe				
Ĩ Ď	B	B	B	Б	H	Ъ	Ъ

Certificatio Expires		10/15/2017	10/15/2017	 10/15/2017		
	-			 	\mathbf{U}	\sim

Ä



Minnesota Pollution Control Agency

520 Lafayette Road North St. Paul, Minnesota 55155-4194



Road North

Steven Giddings Manager Environmental Business Assistance Section