1 of 9

Inspect Minnesota & Midwest Soil Testing

P.O. Box 383 Hugo, MN 55038		Brian Humpal		
651-492-7550/Brian@midwestsoiltesting.com		MPCA Licensed Advanced Inspector		
SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT				
Date: May 24, 2017 Time: 1:00 PM Owner: Elly Fried				
Inspection Address: 1541 Racine Ave S, Lake St Croix Beach, MN 55043				

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This older system (installed in 1993) consists of two pre-cast septic tanks and a rock trench drainfield.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system presently meets MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Brian Humpal Brian Humpal

Ainnesota Pollution Control Agency	Complian
20 Lafayette Road North t. Paul, MN 55155-4194	Existing Subsurfa

ce Inspection Form

ice Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA)	
requirements and attached forms – additional local requirements may also apply.	

For local tracking purposes:

Submit completed form to Local Unit of Government (LUG) and system owner within 15 days

System Status

System status on date (mm/dd/yyyy): 5/24/2017

Compliant – Certificate of Compliance

(Valid for 3 years from report date, unless shorter time frame outlined in Local Ordinance.)

Noncompliant – Notice of Noncompliance

(See Upgrade Requirements on page 3)

Reason(s) for noncompliance (check all applicable)

□ Impact on Public Health (Compliance Component #1) – Imminent threat to public health and safety

Other Compliance Conditions (Compliance Component #3) – Imminent threat to public health and safety

2 of 9

Tank Integrity (Compliance Component #2) – Failing to protect groundwater

Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwater

Soil Separation (Compliance Component #4) – Failing to protect groundwater

Operating permit/monitoring plan requirements (Compliance Component #5) – Noncompliant

Property Information

Parcel ID# or Sec/Twp/Range:

Property address: 1541 Racine Ave S, Lake St Croix Beac	h, MN 55043 Reason for inspection: Property Transfer
Property owner: Elly Fried	Owner's phone: 651-698-2277
or	
Owner's representative:	Representative phone:
Local regulatory authority: <u>Washington County</u>	Regulatory authority phone: _651-430-4052
Brief system description:Two pre-cast septic tanks and a	rock trench drainfield.
Commonts or recommondations:	

Comments or recommendations:

Certification

I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage.

Inspector name:	Brian Humpal	Certification number:	L5342
Business name:	Inspect Minnesota, Midwest Soil Testing	License number:	L2896
Inspector signatur	e: Brian Humpal	Phone number:	651-492-7550

Necessary or Locally Required Attachments

🛛 Soil boring logs	🛛 System/As-built drawing	Forms per local ordinance
Other information (list):	_Report Summary, Property Informa	tion, Disclaimer, License

1. Impact on Public Health – Compliance component #1 of 5

Property address: 1541 Racine Ave S, Lake St Croix Beach, MN 55043

Compliance criteria:		Verification method(s):
System discharge sewage to the ground surface.	🗌 Yes 🖾 No	 Searched for surface outlet Searched for seeping in yard/backup in home
System discharge sewage to drain tile or surface waters.	🗌 Yes 🛛 No	 Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation)
System cause sewage backup into dwelling or establishment.	🗌 Yes 🛛 No	 "Black soil" above soil dispersal system System requires "emergency" pumping Performed dye test
Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.		 Penormed dye test Unable to verify (See Comments/Explanation) Other methods not listed (See Comments/Explanation)

Comments/Explanation:

2. Tank Integrity – Compliance component #2 of 5

-			
C			
L.OM	nllance	Crite	ria.
00111	pliance	01110	

System consists of a seepage pit, cesspool, drywell, or leaching pit.	🗌 Yes 🛛 No
Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.	
Sewage tank(s) leak below their designed operating depth.	🗌 Yes 🖾 No
If yes, which sewage tank(s) leaks:	

Any "yes" answer above indicates the system is Failing to Protect Groundwater.

Comments/Explanation:

Lowered underwater camera into tank - baffles and tank walls OK.

Verification method(s):

Probed tank(s) bottom
 Examined construction records
 Examined Tank Integrity Form (Attach)
 Observed liquid level below operating depth
 Examined empty (pumped) tanks(s)
 Probed outside tank(s) for "black soil"
 Unable to verify (See Comments/Explanation)
 Other methods not listed (See Comments/Explanation)

3. Other Compliance Conditions – Compliance component #3 of 5

a.	Maintenance hole covers are damag	ed, cracked, unsecured,	or appear to structurally unsound	. 🛛 Yes*	🛛 No	Unknown

b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. \Box Yes* \boxtimes No \Box Unknown *System is an imminent threat to public health and safety

Explain:

c. System is non-protective of ground water for other conditions as determined by inspector □ Yes* ⊠ No *System is failing to protect groundwater

Explain:

4. Soil Separation – Compliance component #4 of 5

Date of installation: 1993	Unknown	Verification method(s):	
Shoreland/Wellhead protection/Food Beverage Lodging?	🗌 Yes 🛛 No	Soil observation does not expire. Previou observations by two independent parties	
Compliance criteria:		unless site conditions have been altered	
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.	⊠ Yes 🔲 No	requirements differ. Conducted soil observation(s) (Attach Two previous verifications (Attach bori.) Not applicable (Holding tank(s), no drain Unable to verify (See Comments/Explant Other (See Comments/Explanation)	ng logs) nfield)
Non-performance systems built April 1,	🗌 Yes 🗌 No	Comments/Explanation:	
1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:		Reviewed design and permit records.	
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*			
"Experimental", "Other", or "Performance"	🗌 Yes 🗌 No	Indicate depths of elevations	
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			ee Attached oring Log(s)
Drainfield meets the designed vertical		B. Periodically saturated soil/bedrock	
separation distance from periodically saturated soil or bedrock.		C. System separation	
		D. Required compliance separation*	
Any "no" answer above indicates the Failing to Protect Groundwater.	he system is	*May be reduced up to 15 percent if allow Ordinance.	ved by Loca
Operating Permit and Nitrogen B	MP* – Complia	ance component #5 of 5 🛛 🛛 Not applicab	le
Is the system operated under an Operating Peri	mit? 🗌 Ye	es 🖾 No 🛛 If "yes", A below is required	
Is the system required to employ a Nitrogen BM	IP? 🗌 Ye	es 🛛 No 🛛 If "yes", B below is required	
BMP=Best Management Practice(s) specifi	ied in the system	design	
If the answer to both questions is "no",	this section d	oes not need to be completed.	
-			
Compliance criteria			

a. Operating Permit number: Have the Operating Permit requirements been met?
b. Is the required nitrogen BMP in place and properly functioning?
C Yes No

Any "no" answer indicates Noncompliance.

Upgrade Requirements (*Minn. Stat.* § 115.55) *An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.*

<u>Inspect Minnesota & Midwest Soil Testing</u>


Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: May 24, 2017	Time: 1:15 PM			
Property Address: 1541 Racine Ave S, Lake St Croix Beach, MN Zip: 55043				
Property Owner:	Phone:			
Tank(s) Tank(s)Material Soil Treatmer Septic 2 Fiberglass Rock trenc Aerobic Plastic Gravelless Lift Metal Chamber th Holding Concrete Seepage be Other: Block Mound Other At-grade	t System Other h Alternative system trench Experimental system rench Cesspool system ed Other system			
performed through the maintenance holes. Maintenance				
the ground surface to facilitate access and proper mainte				
Year house built: 1930 Year septic installed: 199	3 Tank size (gals.): 2-1000			
	nber of residents in home?			
	ined by gravity? Y			
	bool bath?			
More than one system (laundry, etc.)?				
Does this property have any footing drain tiles connected to the septic system?				
Are any buildings on this property such as garages or out-buildings connected to this system?				
Are there any additional systems on this property serving other buildings?				
Location of septic system on lot? South Side				
Location of water well on lot? City Water	Is the well a deep well? N/A			
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:				
When was the system last pumped? Nan	ne of pumper:			
How often pumped in previous years?	Is system on a monitoring plan?			
Have you received notices from any government agency concerning this system?				
Is your property located in a shoreland management area? N				
Do you have any additional information that should be g	iven to the new owner?			

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant:

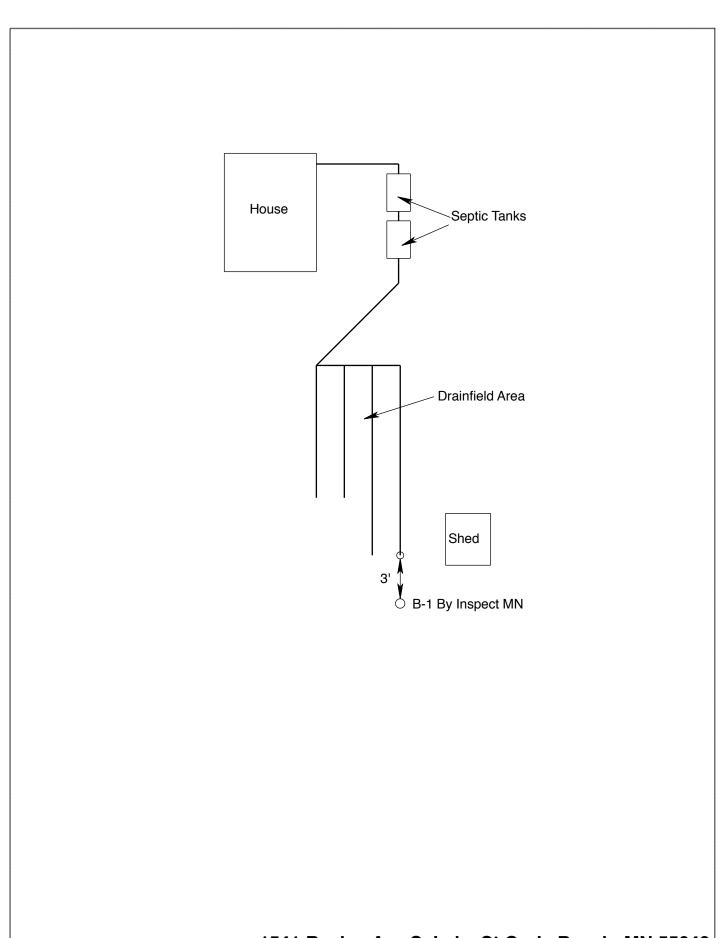

NO SCALE

1541 Racine Ave S, Lake St Croix Beach, MN 55043

Log Of Soil Borings

Location of Project: 1541 Racine Ave S, Lake St Croix Beach, MN 55043						
Borings Made By: Inspect Minnesota			Date:	5/24/17		
	Auger Used: Hand/Bucket		Classification System: USDA			
Boring Number: 1		Boring Number:				
Surface Elevation of Boring		und surface as last nfield trench	Surface Elevation of Boring			
Depth In Inches	Soils Encountered		Depth In Inches	<u>Soils Er</u>	icountered	
0-31 31-42 42-51 51-64 64-70 10	7.5YR 2.5/ 10YR 3/3 10YR 3/4 Mediu ≈10% Ro YR 3/4 Medium 0 ≈15% Ro	 ⁷1 Medium Sand ⁷3 Medium Sand ⁵ Medium Sand ⁵ Medium Sand ⁵ Medium Sand ⁵ With Gravel ⁵ Ock Fragments ⁵ Sal At 70" 				
70" De	pth To End Of Boring Or Redox		D	epth To End Of Bo	oring Or Redox	
Same Ele	evation Of Boring Relative To System		E	levation Of Boring	Relative To System	
-27"Depth To Bottom Of Distribution Media≥43"Of Separation				epth To Bottom O of Separation	f Distribution Media	
End Of Boring At: 70"			F	End Of Boring At:		
Redox Present At: None				Redox Present At:		
Standing Water Present At: None				Water Present At:		

Bottom Of Distribution Medium At: 27 Inches

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing

Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems Non-transferable Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2017

Issued: 11/29/2016

Specialty Area(s): Installer Maintainer Service Provider Advanced Designer Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expires:	
C5342	Brian L Humpal 10/15/2017 Installer, Maintainer, Serv Prov, Adv Designer, Adv Inspec		
C9852	Christopher R Uebe	3/4/2018	
C9052	Designer, Inspector	5/4/2016	



Minnesota Pollution Control Agency

520 Lafayette Road North St. Paul, Minnesota 55155-4194

Steven Giddings, Manager Prevention and Solid Waste Management Section