Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal

MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Date: September 5, 2019 **Time:** 11:15 AM **Owner:** Jennifer Heddle

Inspection Address: 1323 Orwell Ave N, West Lakeland, MN 55082

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records, along with a previous compliance inspection from 2017, which were on file at Washington County. This system consists of two pre-cast septic tanks and a rock trench drainfield.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Christopher Uebe

Brian Humpal

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:		
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days			
System Status			
System status on date (mm/dd/yyyy): 9/5/2019			
·	pliant – Notice of Noncompliance ade Requirements on page 3)		
Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) – Imminent threat to Other Compliance Conditions (Compliance Component #3) – Imminent three Tank Integrity (Compliance Component #2) – Failing to protect groundwate Other Compliance Conditions (Compliance Component #3) – Failing to protect Soil Separation (Compliance Component #4) – Failing to protect groundwate Operating permit/monitoring plan requirements (Compliance Component #4)	at to public health and safety er ect groundwater ter		
Property Information Parcel ID# or Sec/Twp/Range	∋:		
	r inspection: Property Transfer		
Property owner: Jennifer Heddle Owner's p	none: 612-360-7039		
or .			
•	Representative phone: 651-430-6655		
Brief system description: Two pre-cast septic tanks and a rock trench drainfield.	dutionty priorie. <u>031-430-0000</u>		
Comments or recommendations:			
Certification			
I hereby certify that all the necessary information has been gathered to determine the condetermination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.			
Inspector name: Brian Humpal/Christopher Uebe Certification	n number: <u>C5342/C9852</u>		
	e number: L2896		
Inspector signature: Brian Thumpak for the Phor	ne number: 651-492-7550		
Necessary or Locally Required Attachments			
Soil boring logs	ocal ordinance		
☑ Other information (list): Report Summary, Property Information, Disclaimer, Lice	ense		

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 1 of 3

Property address: 1323 Orwell Ave N, West Lakeland, MN 55082

Inspector initials/Date: 9/5/2019 24

1.	Impact on Public Health - Compliance component #1 of 5					
	Compliance criteria:		Verification method(s):			
	System discharge sewage to the ground surface.	☐ Yes ☒ No	 ✓ Searched for surface outlet ✓ Searched for seeping in yard/backup in home 			
	System discharge sewage to drain tile or surface waters.	☐ Yes ☒ No	 ☑ Excessive ponding in soil system/D-boxes ☐ Homeowner testimony (See Comments/Explanation) ☐ "Black soil" above soil dispersal system 			
	System cause sewage backup into dwelling or establishment.	☐ Yes ☐ No	System requires "emergency" pumping Performed dye test			
	Any "yes" answer above indicates an Imminent Threat to Public Hea		Unable to verify (See Comments/Explanation)Other methods not listed (See Comments/Explanation)			
	Comments/Explanation: None of the above found.					
2.	Tank Integrity – Compliance cor	nponent #2 of 5				
	Compliance criteria:		Verification method(s):			
	System consists of a seepage pit, cesspool, drywell, or leaching pit.	☐ Yes ⊠ No	☐ Probed tank(s) bottom			
	Seepage pits meeting 7080.2550 may be		 ☑ Examined construction records ☐ Examined Tank Integrity Form (Attach) ☐ Observed liquid level below operating depth ☐ Examined empty (pumped) tanks(s) ☐ Probed outside tank(s) for "black soil" ☐ Unable to verify (See Comments/Explanation) ☒ Other methods not listed (See Comments/Explanation) 			
	compliant if allowed in local ordinance.					
	Sewage tank(s) leak below their designed operating depth.	☐ Yes ⊠ No				
	If yes, which sewage tank(s) leaks:					
	Any "yes" answer above indica system is Failing to Protect Gr					
	Comments/Explanation:	haffia and tank walls OK				
	Lowered underwater camera into tanks	- banies and tank walls OK	•			
3.	Other Compliance Conditions	•				
	-		ppear to structurally unsound. Yes* No Unknown			
	System is an imminent threat to pu	y impact public health or safety. ☐ Yes ☒ No ☐ Unknown				
	Explain:					
	c. System is non-protective of ground wa *System is failing to protect ground		letermined by inspector ☐ Yes* ☒ No			
	Explain:					

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Inspector initials/Date: 9/5/2019 84(1)

4.	Soil Separation – Compliance compor	nent #4 of 5		
	Date of installation: 2000	Unknown	Verification method(s):	
	Shoreland/Wellhead protection/Food Beverage Lodging?	☐ Yes ⊠ No	Soil observation does not expire. Probservations by two independent pa	
	Compliance criteria:		unless site conditions have been alt	
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.	☐ Yes ☐ No	requirements differ. Conducted soil observation(s) (A tack of the conducted soil observation) (Attack of the c	ch boring logs) o drainfield) Explanation)
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment: Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*	⊠ Yes □ No	Comments/Explanation: Reviewed previous compliance insp Reviewed design and permit records	
	"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required) Drainfield meets the designed vertical separation distance from periodically	☐ Yes ☐ No	A. Bottom of distribution media B. Periodically saturated soil/bedrock	See Attached Boring Log(s)
	saturated soil or bedrock.		C. System separation D. Required compliance separation*	
5.	Any "no" answer above indicates to Failing to Protect Groundwater. Operating Permit and Nitrogen B		*May be reduced up to 15 percent if Ordinance.	·
<u> </u>	Is the system operated under an Operating Per Is the system required to employ a Nitrogen BM	mit?	No If "yes", A below is required No If "yes", B below is required	iousio
BMP=Best Management Practice(s) specified in the system design				
	If the answer to both questions is "no",	ot need to be completed.		
	Compliance criteria			
	a Operating Permit number:	peen met?	☐ Yes ☐ No	
	b. Is the required nitrogen BMP in place and	properly functioning?	☐ Yes ☐ No	
	Any "no" answer indicates Nencom	nlianaa		

Any "no" answer indicates Noncompliance.

Property address: 1323 Orwell Ave N, West Lakeland, MN 55082

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.


www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats Page 3 of 3

Inspect Minnesota & Midwest Soil Testing

Subsurface Sewage Treatment System Owner/Property Information This information will be used for the purpose of conducting an MPCA Compliance Inspection.

This information will be used for the purpose of conducting all twife	T compilative inspection.				
Date of Inspection: September 5, 2019	Time: 11:15 AM				
Property Address: 13223 Orwell Ave N, West Lakeland, MN	Zip: 55082				
Property Owner: Jennifer Heddle	Phone: 612-360-7039				
Tank(s) Tank(s)Material Soil Treatment System Septic 2 Fiberglass ⊠Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding ⊠Concrete Seepage bed Other: Block Mound Other At-grade Are the tank maintenance covers accessible? ☑ Yes ☐ No *If performed through the maintenance holes. Maintenance hole covers.					
the ground surface to facilitate access and proper maintenance of					
1	Tank size (gals.): 2-1000				
How long has seller owned the property? 2000 Number of rown Number of bedrooms? 4 Are all floors drained by a	esidents in home? 4				
Garbage disposal? Y Whirlpool bath	•				
More than one system (laundry, etc.)? N	; 1				
Does this property have any footing drain tiles connected to the s	eptic system? N				
and the property and the second secon	opino oyunaa				
Are any buildings on this property such as garages or out-buildin	gs connected to this system? N				
Are there any additional systems on this property serving other b	uildings? N				
Location of septic system on lot? South Side					
Location of water well on lot? Southwest Side Is the	e well a deep well? Y				
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? N If yes, explain:					
When was the system last pumped? 2018 Name of pur	nper: Meyer Sewer Service				
How often pumped in previous years? Every 3 Is system on a monitoring plan? N					
Have you received notices from any government agency concerning this system? N					
Is your property located in a shoreland management area? N					
Do you have any additional information that should be given to the new owner? N					
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.					

Owner/Occupant: Date:

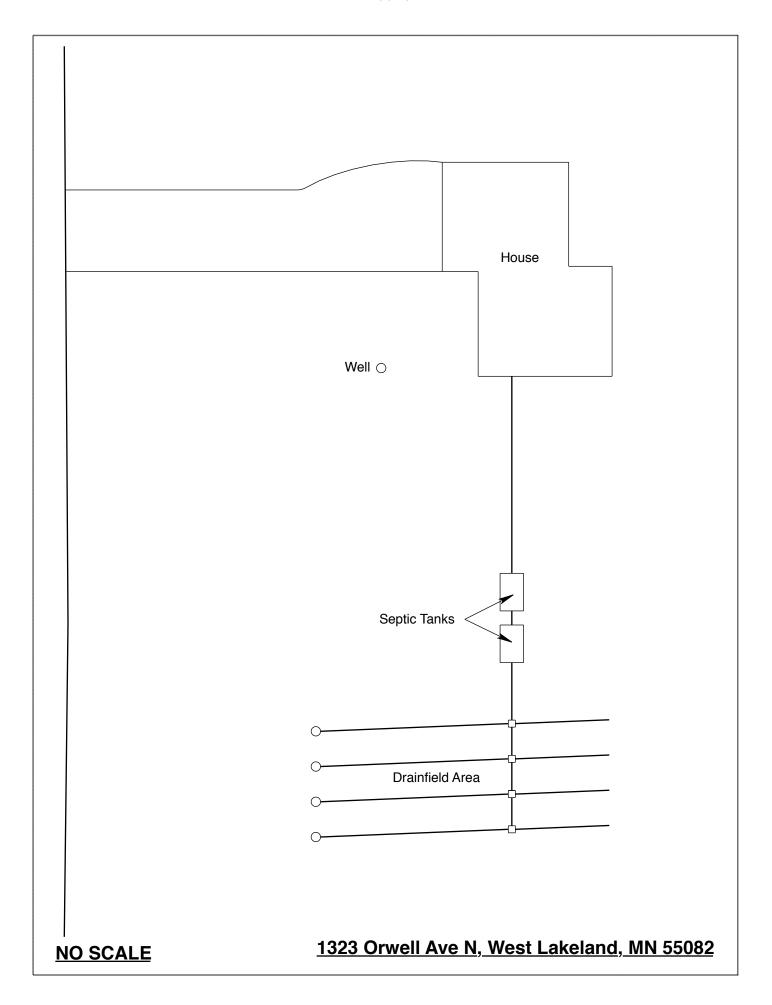

Loc	ation of Project:	1323 Orwell Ave N, V	Vest Lakela	ind, MN 55082	
Borings Made By: Inspect Minnesota		Date: 5/8/17		5/8/17	
Auger Used: Hand/Bucket		Classification System: USDA		USDA	
	Boring Number:	1		Boring Number:	
Surface Elevation of Boring Same ground surface as last drainfield trench		Surface Elevation Boring			
Depth In Inches	Soils E	ncountered	Depth In Inches	Soils Er	ncountered
0-18 18-29 29-43 43-56 56-63	10YR 2 10YF 10YR 4 10YR 3/4 Mediu ≈20% Ro	dy Silt Loam (Fill?) /2 Silt Loam R 4/3 Silt /4 Silt Loam Im Sand With Gravel Ock Fragments Sal At 63"			
63"	Depth To End Of B	oring Or Redox		Depth To End Of B	oring Or Redox
Same	Elevation Of Boring	g Relative To System		Elevation Of Boring	Relative To System
		Of Distribution Media			of Distribution Media
≥42"	Of Separation			Of Separation	
	End Of Boring At:	63"		End Of Boring At:	
	Redox Present At:	None		Redox Present At:	
	Water Present At:	None	Standing	Water Present At:	

Bottom Of Distribution Medium At: 21 Inches

B-27 Pt. of Fk of Sec. 28, TZSN R20W (West Lakeland) ŋs

	or Project Lot II, Block 5, "FOI"			,
Borings	made by RS Johnson Soil Testing		Date	May 1998
Classifi	cation System: AASHO; USDA-	-scs <u>x</u>	_; Unified;	other
Auger us Soil Color	sed (check two): Hand, or Power Descriptions: Minsell Soil Color Chart	er X; F	light X, or Bucke	et; other <u>Giddi</u> r
Depth,	Boring number SB3A	Depth,	Boring number	∕ SB4A
in feet	Surface elevation	in feet	Surface elevation	į.
0	Very Dark Grayish Brown (10YR 3/2)	0 —	Black Silt Loam	(10YR 2/1)
1.—	Silt Loam Black (10YR 2/1) Silt Loam	1 —	Dark Grayish Bro Dark Brown Silt	wn (10YR 4/2) & (10YR 4/3)
2 —	Dark Brown (10YR 3/3) Silt	2 —	Yellowish Brow	n (10YR 5/6)
3 	Yellowish Brown (10YR 5/6)	3 —	Cit	
4	Silt (Lacustrine) Dark Brown (7.5YR 4/4)	4 —	Silt Brownish Yello	w (10YR 6/8)
5 —	Fine Sand	5 —	Fine Sand (End of Boring)
6 —	(End of Boring)	6 —		
7 —		7		
8 —	·	8 —		
End of b	oring at 5.0 feet.	Find of	boring at 4.5	feet
	water table:		ng water table:	
-	at feet of depth,		t at feet o	of depth.
	hours after boring.		hours after	
	ent in boring hole x.	Not pre	esent in boring hol	
Ottled	soil:	Mottled	i soil:	
bserved	at 4.1 feet of depth.	Observe	ed at 4.1 feet	of depth.
ot pres	ent in boring hole	Not pre	esent in boring hol	e
bservat	ions and comments:	' Observa	ations and comments	1 :
Sandetone	a S. F. dooth	White	e Sandstone @ 421 denth	

Tracks & Ruts from previous vehicle traffic present in Test Area.

Tracks & Ruts from previous vehicle traffic present in Test Area.

B-27

Location	or Project Lot 11, Block 5, "FOU	NIA	IN HILLS"	, Pt. of Ex of Sec. 28, T29N R20W (West Lakeland)	
Borings made by RS Johnson Soil Testing Date May 1998					
Classification System: AASHO; USDA-SCS X ; Unified; other					
Auger used (check two): Hand, or Power X ; Flight X , or Bucket; other Gidding Soil Color Descriptions: Minsell Soil Color Chart					
Depth,	Boring number SP5A		Depth,	Boring number SP6A	
in feet	Surface elevation(Slight Drainage Swale)		in feet	Surface elevation	
0	Very Dark Gray (10YR 3/1)		0	Very Dark Grayish Brown (10YR 3/2) Silt	
1.—	Silt		1 -	Black (10YR 2/1)	
2 —	Yellowish Brown (10YR 5/6)		2 —	Silt	
3 —	Silt		3 —	Dark Grayish Brown (100R 4/2) & Dark Brown (100R 4/3) & Silt	
_	Yellowish Brown (10YR 5/6) Sandy Silt			Yellowish Brown (10YR 5/6)	
4	Yellowish Brown (10YR 5/6)		4 —	Silt	
5 —	Sand		5 —	Yellowish Brown (10YR 5/6)	
6 —	(End of Borring)		6	Silty Sand (End of Boring)	
7 —			7 —		
8 —	·		8 —		
End of b	oring at 5.5 feet.		End of	boring at 6.0 feet.	
Standing	water table:		Standing water table:		
Present	at feet of depth,		Present at feet of depth,		
hours after boring.			hours after boring.		
Not present in boring hole x.			Not present in boring hole x.		
Mottled soil:			Mottled	I soil:	
Observed	at feet of depth.		Observe	ed atfeet of depth.	
Not pres	ent in boring hole		Not pre	sent in boring holex	
	ions and comments:	•		tions and comments:	

B-27 Location or Project Lot 11, Block 5, "FOLNMAIN HILLS", Pt. of Ez of Sec. 28, T29N R20W (West Lakeland) Borings made by RS Johnson Soil Testing May 1998 Date Classification System: AASHO ____; USDA-SCS X ; Unified ____; other ____ Auger used (check two): Hand X, or Power ___; Flight ___, or Bucket X; other ____ Soil Color Descriptions: Minsell Soil Color Chart Boring number _____ Boring number Depth. Depth, in in Surface elevation ____ Surface elevation ___ feet feet 0 -(10YR 3/2)Very Dark Grayish Brown Very Dark Grayish Brown (10YR 3/2)Silt Loam Silt Loam 1 .--1 — (10 YR 5/6)Yellowish Brown Dark Grayish Brown Dark Brown (10YR 4/2)& (10YR 4/3) Silt Loam Silt Loam 2 — Yellowish Brown (10YR 5/6) Yellowish Brown (10YR 5/8)Silt Loam Silty Sand (7.5YR 4/4)Dark Brown 3 — 3 — Silty Sand (End of Boring) (End of Boring) End of boring at 3.3 feet. End of boring at 3.5 feet. Standing water table: Standing water table: Present at _____ feet of depth, Present at _____ feet of depth, hours after boring. ____ hours after boring. Not present in boring hole x. Not present in boring hole X Mottled soil: Mottled soil: Observed at _____ feet of depth. Observed at _____ feet of depth. Not present in boring hole X . Not present in boring hole X _. Observations and comments: Observations and comments:

Hand Auger obstructed.

Hand Auger obstructed.

B-27

	or Project Lot 11, Block 5, "FU			, Pt. or by or sec. Z		ACC TOKETOD
Borings	made by RS Johnson Soil Testing		·	Date	May 1998	
Classif	Lcation System: AASHO; USDA	A-S	cs X	; Unified;	other	
	sed (check two): $Hand X$, or $Port$ Descriptions: Munsell Soil Color Chart	/eT	;; F1	ight, or Buck	et <u>X</u> ; oth	er
Depth,	Boring number Extension of P-5A		Depth,	Boring number _	,	
in feet	Surface elevation]	in feet	Surface elevati	on	
			reer		•	
0		1	0 —			
•	(See Data Sheet for P-5A)					
1.—	·		1 —			
		†				
2 —	Yellowish Brown (10YR 5/6)		2 —			
•	Silt					
3 —	Yellowish Brown (10YR 5/6) Silty Sand		3			
4 —	Dark Yellowish Brown (10YR 4/4)		4	·		
	Silty Sand					
5 —	(Pad of Persian)		5 —			
	(End of Boring)					
o —			6 —			
7			,			ĺ
,			′ —	·		
8 —	·		8 —			
		ו]]			
	,					
	oring at 5.0 feet.]	boring at	feet.	
-	water table:		l	g water table:		
	at feet of depth,		1	at feet o		•
	hours after boring.			hours after		
not pres	ent in boring holex		Not pre	sent in boring hol	Le•	
Mottled	soil:		Mottled	soil:		
	at * feet of depth.		Observe	d at feet	of depth.	
Not pres	ent in boring hole		Not pre	sent in boring hol	le	
	ions and comments: tling @ 4.5' depth.		Observa	tions and comments	:	•

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems

Non-transferable

Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2019

Issued: 11/20/2018

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expires:
C9633	Anthony P Scully	3/5/2020
	Installer, Designer (Apprentice)	
C5342	Brian L Humpal	10/15/2023
	Installer, Maintainer, Serv Prov, Adv	Designer, Adv Inspector
C9852	Christopher R Uebe	3/4/2021
	Designer, Inspector	



520 Lafayette Road North St. Paul, Minnesota 55155-4194



Nick Haig, Supervisor Certification and Training Unit