Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal

MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 567 Quinnell Ave N, Lakeland, MN 55043

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This very old system (installed in 1989) consists of a pre-cast septic tank, a pre-cast lift tank, and a rock trench drainfield. It should be noted that the average life expectancy of a septic system is approximately 30 years.

Although not a compliance criteria, it should be noted that the septic tank and lift tank manhole covers are buried. I recommend extending these covers to the ground surface to facilitate easier access and proper maintenance. The septic tank is currently due for maintenance pumping and should be pump as soon as possible. In addition, the inspection caps on the drainfield and septic tank are damage or missing and should be replaced to prevent ground water infiltration. Also, the electrical box for the lift pump has become detached from its post and should be repaired. There is a toilet that is constantly running, it should be repaired to prevent overloading and premature failure of the septic system.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Christopher Uebe

Brian Humpal

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollurequirements and attached forms – additional local requirements	nents may also apply.
Submit completed form to Local Unit of Government (within 15 days	LUG) and system owner
System Status	
System status on date (mm/dd/yyyy):10/8/2019	9
□ Compliant – Certificate of Compliant (Valid for 3 years from report date, unless shorted frame outlined in Local Ordinance.)	<u> </u>
 ☐ Other Compliance Conditions (Compliance Component #2) — ☐ Other Compliance Conditions (Compliance Component #4) ☐ Soil Separation (Compliance Component #4) 	nent #1) – Imminent threat to public health and safety omponent #3) – Imminent threat to public health and safety Failing to protect groundwater omponent #3) – Failing to protect groundwater
	· (completed compension in)
Duamantian	
	Parcel ID# or Sec/Twp/Range:
Property address: 567 Quinnell Ave N, Lakeland, MN 55	
Property owner:Tom Norris or	Owner's phone: 651-436-6994
Owner's representative:	Representative phone:
Local regulatory authority: Washington County	Regulatory authority phone: 651-430-6655
	cast lift tank, and a rock trench drainfield.
Comments or recommendations:	
Although not a compliance criteria, it should be noted that the sep covers to the ground surface to facilitate easier access and prope should be pump as soon as possible. In addition, the inspection of	otic tank and lift tank manhole covers are buried. I recommend extending these or maintenance. The septic tank is currently due for maintenance pumping and caps on the drainfield and septic tank are damage or missing and should be cox for the lift pump has become detached from its post and should be repaired. I prevent overloading and premature failure of the septic system.
Certification	
	n gathered to determine the compliance status of this system. No can be made due to unknown conditions during system construction, r future water usage.
Inspector name: Brian Humpal/Christopher Uebe	Certification number: C5342/C9852
Business name: Inspect Minnesota, Midwest Soil Testin	-
Inspector signature: Brian Humpal Affice	Phone number: _651-492-7550
Necessary or Locally Required Attachmer	nts
Soil boring logs System/As-built drawi	
Other information (list): Report Summary. Property	

Property address: _ 567 Quinnell Ave N, Lakeland, MN 55043

Inspector initials/Date: _10/8/2019 **B**#

	Compliance criteria:			Verification method(s):				
		stem discharge sewage to the	☐ Yes ⊠ No	Searched for surface outlet				
		ound surface.		Searched for seeping in yard/backup in home				
		stem discharge sewage to drain tile surface waters.	☐ Yes ⊠ No	 ☑ Excessive ponding in soil system/D-boxes ☐ Homeowner testimony (See Comments/Explanation) 				
		vstem cause sewage backup into velling or establishment.	☐ Yes ⊠ No	 "Black soil" above soil dispersal system System requires "emergency" pumping Performed dye test 				
		ny "yes" answer above indicate n Imminent Threat to Public Hea	_	☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)				
		omments/Explanation:						
	No	one of the above found.						
2.	Ta	ank Integrity – Compliance cor	mponent #2 of 5					
	C	ompliance criteria:		Verification method(s):				
		stem consists of a seepage pit,	☐ Yes ⊠ No	□ Probed tank(s) bottom				
		esspool, drywell, or leaching pit.						
		epage pits meeting 7080.2550 may be mpliant if allowed in local ordinance.		☐ Examined Tank Integrity Form (Attach)				
		,	□ Voc. ⊠ No.	Observed liquid level below operating depth				
		ewage tank(s) leak below their esigned operating depth.	☐ Yes ⊠ No	Examined empty (pumped) tanks(s)				
		yes, which sewage tank(s) leaks:		Probed outside tank(s) for "black soil"				
	Any "yes" answer above indicates the		ates the	☐ Unable to verify (See Comments/Explanation)				
	sj	stem is Failing to Protect Gr	oundwater.	☑ Other methods not listed (See Comments/Explanation)				
	Co	omments/Explanation:						
	Although not a compliance criteria, it should be noted that the septic tank and lift tank manhole covers are buried. I recommend exte							
	pu	mping and should be pump as soon as pos	ssible. In addition, the ins	per maintenance. The septic tank is currently due for maintenance spection caps on the drainfield and septic tank are damage or missing				
				electrical box for the lift pump has become detached from its post and d be repaired to prevent overloading and premature failure of the septic				
		stem.	,					
_	_							
3.	O.	ther Compliance Conditions	s – Compliance com	ponent #3 of 5				
	a.	Maintenance hole covers are damage	d, cracked, unsecured,	or appear to structurally unsound. $\ \square$ Yes* $\ \square$ No $\ \square$ Unknown				
	b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☒ No ☐ Ur *System is an imminent threat to public health and safety							
		Explain:						
	C.	System is non-protective of ground was *System is failing to protect ground		as determined by inspector ☐ Yes* ☒ No				
		Explain:						
		b. 						

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Inspector initials/Date: 10/8/2019 8# (M

	Date of installation: 1989	Unkr	nown	٧	erification method(s):			
	Shoreland/Wellhead protection/Food Beverage Lodging?	☐ Yes	⊠ No		Soil observation does not expire. Previous soil observations by two independent parties are s			
	Compliance criteria:			u	unless site conditions have been altered or local			
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	⊠ Yes	□ No	requirements differ. Conducted soil observation Two previous verifications Not applicable (Holding tar		s (Attach boring logs)		
	Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.				Unable to verify (See Comments	/Explanation)		
	Non-performance systems built April 1,	☐ Yes	☐ No	C	comments/Explanation:			
	1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:			Reviewed design and permit records.		ds.		
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*							
-	"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)	☐ Yes ☐ No		_ _lr	Indicate depths of elevations			
			<u>A</u> .	Bottom of distribution media	See Attached Boring Log(s)			
	Drainfield meets the designed vertical			В.	Periodically saturated soil/bedrock			
	separation distance from periodically saturated soil or bedrock.			C.	System separation			
					. Required compliance separation*			
Any "no" answer above indicates the system is Failing to Protect Groundwater. *May be reduced up to 15 percent if allowed Ordinance.				if allowed by Local				
5.	Operating Permit and Nitrogen B	MP* – C	Compliand	ce com	ponent #5 of 5 Not app	olicable		
	Is the system operated under an Operating Per				If "yes", A below is required			
	Is the system required to employ a Nitrogen BM				If "yes", B below is required			
BMP=Best Management Practice(s) specified in the system design								
If the answer to both questions is "no", this section does not need to be completed.								
	Compliance criteria							
	a. Operating Permit number:				☐ Yes ☐ No			
	Have the Operating Permit requirements to							

Property address: 567 Quinnell Ave N, Lakeland, MN 55043

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3

Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information


This information will be used for the purpose of conducting an MPCA Compliance Inspection.


Date of Inspection: October 8, 2019	Time: 1:15 PM				
Property Address: 567 Quinnell Ave N, Lakeland, MN	Zip: 55043				
Property Owner: Tom Norris	Phone: 651-436-6994				
Tank(s) Tank(s)Material Soil Treatment System Septic 1 □Fiberglass □Rock trench □Aerobic □Plastic □Gravelless trench □Lift □Metal □Chamber trench □Holding □Concrete □Seepage bed □Other: □Block □Mound □Other □At-grade	Other Alternative system Experimental system Cesspool system Other system				
Are the tank maintenance covers accessible? Yes No *If no, performed through the maintenance holes. Maintenance hole covers the ground surface to facilitate access and proper maintenance of the	should be made accessible to				
Year house built: 1948 Year septic installed: 1989 Tar	nk size (gals.): 1250				
How long has seller owned the property? Number of resid	ents in home?				
Number of bedrooms? 2 Are all floors drained by grav	ity? Y				
Garbage disposal? Whirlpool bath?					
More than one system (laundry, etc.)?					
Does this property have any footing drain tiles connected to the septic system? Are any buildings on this property such as garages or out-buildings connected to this system?					
Are there any additional systems on this property serving other buildings?					
Location of septic system on lot? North Side					
Location of water well on lot? N/A Is the w	ell a deep well? City Water				
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups,					
surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:					
When was the system last pumped? Due Name of pumper	r: Unknown				
	n a monitoring plan?				
Have you received notices from any government agency concerning this system?					
Is your property located in a shoreland management area? N					
Do you have any additional information that should be given to the new owner?					
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection					

Date:

by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant:

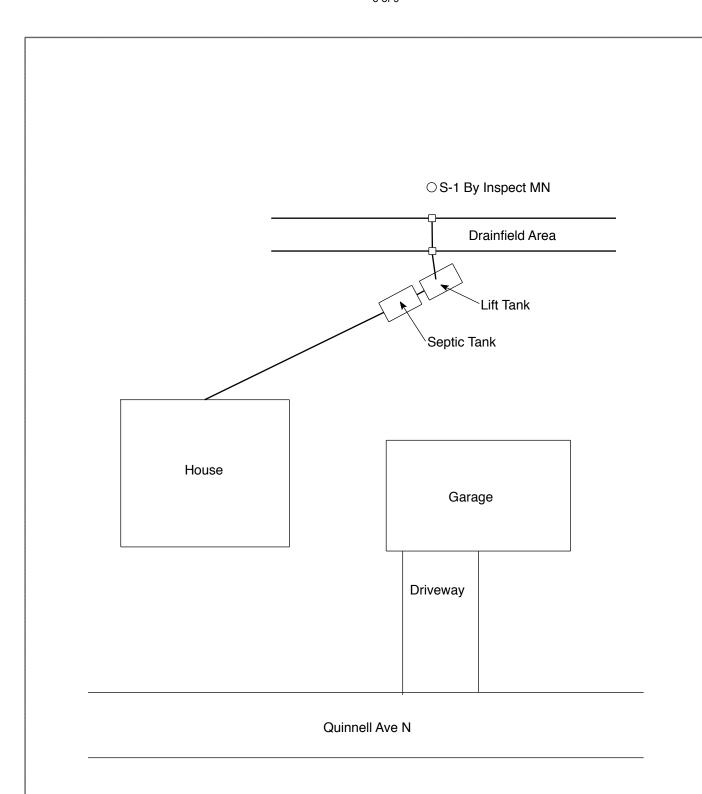



567 Quinnell Ave N, Lakeland, MN 55043

Soil Observations Log

Location of Project: 567 Quinnell Ave N, Lakeland, MN 55043							
	oservati	ons Made By:	Inspect Minnesota		-	Date:	10/8/19
C	Classific	ation System:	USDA				
	Soil	Observation:	1		Soil C	bservation:	
Surface Elevation of Observation		Same ground surface as last drainfield trench			face tion of vation		
Depth In Inches	Rock %	Soils E	ncountered	Depth In Rock %		Soils Encountered	
0-13 13-20 20-50	≥35	7.5YR 2.5, 7.5YR 3/4 Me	i/2 Sandy Loam /3 Medium Sand edium Coarse Sand th Gravel				
50"	Depth T	o End Of Soil O	bservation Or Redox		Depth T	o End Of Soil	Observation Or Redox
		n Of Observatio					
-25" Depth To Bottom Of Distribution Media						Distribution Media	
≥25" Of Separation				Of Sepa	ration		
Fnd	Of Soil (Observation At:	50"	Fnd Of	Soil Oh	servation At:	
End Of Soil Observation At: 50" Redox Present At: None			Liid Oi		x Present At:		
Standing Water Present At: None			Standi		r Present At:		
Standing Water Frederic Act							

Bottom Of Distribution Medium At: 25 Inches					
Signature:	Color Ole				

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems

Non-transferable

Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2019

Issued: 11/20/2018

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expires:
C9633	Anthony P Scully	3/5/2020
	Installer, Designer (Apprentice)	, v , v
C5342	Brian L Humpal	10/15/2023
	Installer, Maintainer, Serv Prov, Adv	Designer, Adv Inspector
C9852	Christopher R Uebe	3/4/2021
	Designer, Inspector	



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Nich Haig

Nick Haig, Supervisor Certification and Training Unit