Midwest Sewer Services

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com MPCA

MPCA Licensed Advanced Inspector

Brian Humpal

SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 9850 Heron Ave N, Grant, MN 55110

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, Steve Nussbaum, and have reviewed the original design/permit records on file at Washington County. This very old system (septic tank and drainfield installed in 1982 and additional drainfield installed in 1997) consists of a pre-cast septic tank and a rock trench drainfield. It should be noted that the average life expectancy of a septic system is approximately 30 years.

Predicated on my inspection of the system, my review of the history of the system with the owner, and my review of the original design/permit records, it is my opinion that this system presently meets MPCA minimum compliance inspection requirements.

Midwest Sewer Services have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Midwest Sewer Services disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Christopher Uebe

Brian Humpal

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:				
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days					
System Status					
System status on date (mm/dd/yyyy):11/21/2019					
· · · · · · · · · · · · · · · · · · ·	npliant – Notice of Noncompliance rade Requirements on page 3)				
Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) – Imminent threat to public health and safety Other Compliance Conditions (Compliance Component #3) – Imminent threat to public health and safety Tank Integrity (Compliance Component #2) – Failing to protect groundwater Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwater Soil Separation (Compliance Component #4) – Failing to protect groundwater Operating permit/monitoring plan requirements (Compliance Component #5) – Noncompliant					
Property Information Parcel ID# or Sec/Twp/Range	ne:				
	or inspection: Property Transfer				
• •	phone: 612-240-9061				
Owner's representative: Represen	tative phone:				
Local regulatory authority: Washington County Regulator	y authority phone: _651-430-6655				
Brief system description: A pre-cast septic tank and a rock trench drainfield.					
Comments or recommendations:					
Certification					
I hereby certify that all the necessary information has been gathered to determine the of determination of future system performance has been nor can be made due to unknow possible abuse of the system, inadequate maintenance, or future water usage.					
Inspector name: Brian Humpal/Christopher Uebe Certificati	on number: <u>C5342/C9852</u>				
Business name: Midwest Sewer Services Licen	se number: L2896				
Inspector signature: Beian Humpal fffin Ma Pho	ne number: 651-492-7550				
Necessary or Locally Required Attachments					
	local ordinance				
☐ Other information (list): Report Summary, Property Information, Disclaimer, Lice					

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 1 of 3

Property address: 9850 Heron Ave N, Grant, MN 55110

Inspector initials/Date: 11/21/2019 **24**

1.	Impact on Public Health - Compliance component #1 of 5				
	Compliance criteria: System discharge sewage to the ground surface. System discharge sewage to drain tile or surface waters. System cause sewage backup into dwelling or establishment. Any "yes" answer above indicates an Imminent Threat to Public Head Comments/Explanation: None of the above found.		Verification method(s): Searched for surface outlet Searched for seeping in yard/backup in home Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation) "Black soil" above soil dispersal system System requires "emergency" pumping Performed dye test Unable to verify (See Comments/Explanation) Other methods not listed (See Comments/Explanation)		
2.	Tank Integrity – Compliance con Compliance criteria: System consists of a seepage pit,	nponent #2 of 5	Verification method(s): ☑ Probed tank(s) bottom		
	cesspool, drywell, or leaching pit. Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance. Sewage tank(s) leak below their designed operating depth.	☐ Yes ⊠ No	 ☑ Examined construction records ☐ Examined Tank Integrity Form (Attach) ☐ Observed liquid level below operating depth ☐ Examined empty (pumped) tanks(s) 		
	If yes, which sewage tank(s) leaks: Any "yes" answer above indicates the system is Failing to Protect Groundwater.		 □ Probed outside tank(s) for "black soil" □ Unable to verify (See Comments/Explanation) ☑ Other methods not listed (See Comments/Explanation) 		
3.	Comments/Explanation: Lowered underwater camera into tank - Other Compliance Conditions		nt #3 of 5		
	 a. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. Yes* No Unknown b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. Yes* No Unknown *System is an imminent threat to public health and safety Explain: 				
	c. System is non-protective of ground wa *System is failing to protect ground Explain:		ermined by inspector ☐ Yes* ☒ No		

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

4 of 10							
Prop	perty address: 9850 Heron Ave N, Grant, MN	55110	Inspector initials/Date:11/2	21/2019 BA ()			
4.							
	Date of installation: 1982/1997 Shoreland/Wellhead protection/Food Beverage Lodging? Compliance criteria:	☐ Unknown ☐ No	Verification method(s): Soil observation does not expire. Proobservations by two independent particles site conditions have been alto	rties are sufficient,			
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.	☐ Yes ☐ No	requirements differ. Conducted soil observation(s) (Attach boring logs) Two previous verifications (Attach boring logs) Not applicable (Holding tank(s), no drainfield) Unable to verify (See Comments/Explanation) Other (See Comments/Explanation)				
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	⊠ Yes □ No	Comments/Explanation: Reviewed design and permit records. Wellhead protection area.				
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*		-				
	"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)	☐ Yes ☐ No	A. Bottom of distribution media	See Attached Boring Log(s)			
	Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.		B. Periodically saturated soil/bedrock C. System separation				
	Any "no" answer above indicates the system in Failing to Protect Groundwater.		D. Required compliance separation* *May be reduced up to 15 percent if Ordinance.	allowed by Local			
5.	5. Operating Permit and Nitrogen BMP* – Compliance component #5 of 5 Not applicable						
	Is the system operated under an Operating Period Is the system required to employ a Nitrogen BM BMP=Best Management Practice(s) specification.	IP? ☐ Yes ☐	, , , , , , , , , , , , , , , , , , ,				

If the answer to both questions is "no", this section does not need to be completed.

Compliance criteria

a. Operating Permit number: ☐ Yes ☐ No Have the Operating Permit requirements been met? b. Is the required nitrogen BMP in place and properly functioning? ☐ Yes ☐ No

Any "no" answer indicates Noncompliance.

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3

Midwest Sewer Services


Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: November 21, 2019	Time: 11:15 AM		
Property Address: 9850 Heron Ave N, Grant, MN	Zip: 55110		
Property Owner: Steve & Kay Nussbaum	Phone: 612-240-9061		
⊠Septic 1 □Fiberglass ⊠Rock □Aerobic □Plastic □Grave □Lift □Metal □Cham	Elless trench		
performed through the maintenance holes. Mainten	ance hole covers should be made accessible to		
the ground surface to facilitate access and proper ma			
Year house built: 1982 Year septic installed:	1982/1997 Tank size (gals.):		
	Number of residents in home? 2-5		
	s drained by gravity? Lower Pumped		
C 1	hirlpool bath? Y		
More than one system (laundry, etc.)? N			
Does this property have any footing drain tiles conn Are any buildings on this property such as garages of			
and the second s	3 · · · · · · · · · · · · · · · · · · ·		
Are there any additional systems on this property se	rving other buildings? N		
Location of septic system on lot? West Side			
Location of water well on lot? North Side Is the well a deep well? Y			
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? N If yes, explain:			
When was the system last pumped? 2017 Name of pumper: Pinky's Sewer Service			
How often pumped in previous years? Every 3 Is system on a monitoring plan? N			
Have you received notices from any government agency concerning this system? N			
Is your property located in a shoreland management area? N			
Do you have any additional information that should be given to the new owner? N			

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Midwest Sewer Services.

Owner/Occupant: Steve Nussbaum's Signature On File Date: 11/21/2019

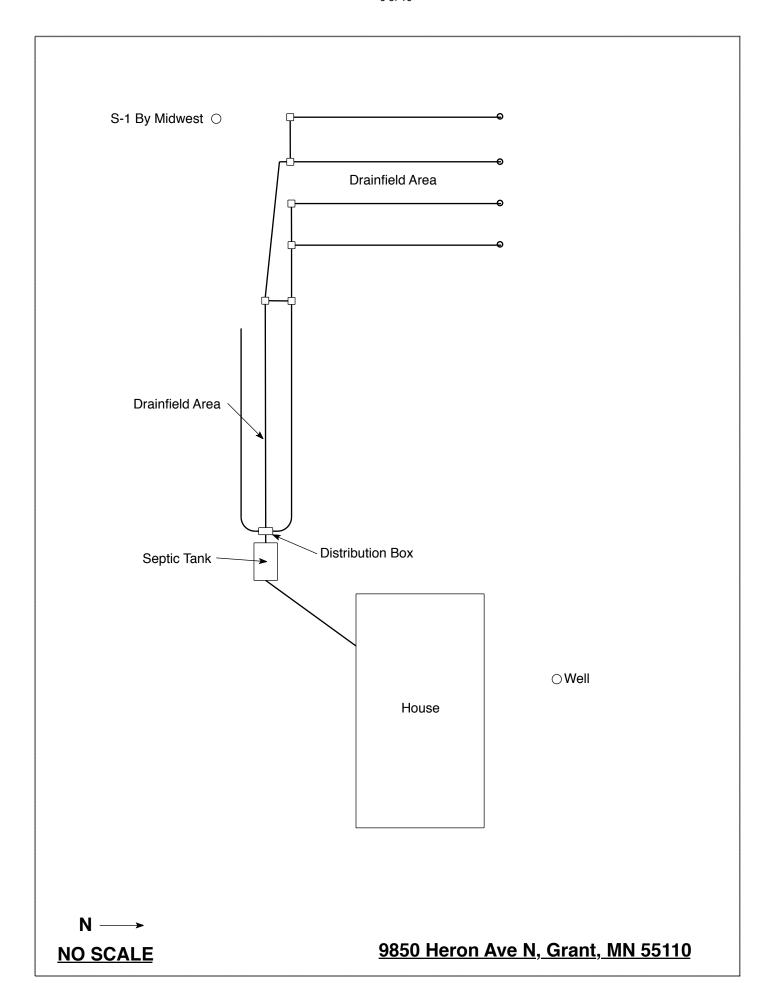

Soil Observations Log

Location of Project: 9850 Heron Ave N, Grant, MN 55110						
		Midwest Sewer Ser				11/21/19
	ssification System:					
	Soil Observation:	1	Soil Ob		bservation:	
Surface Elevation Observati	n of Same grou	nd surface as last field trench	Surface Elevation of Observation			
Depth In Inches	ock % Soils I	<u>Encountered</u>	Depth In Rock %		Soils Encountered	
0-8 8-23 23-39 39-59 59-65	10YR 3 10YR 4 10YR 5 10YR 5/4 Loa	Loamy Fine Sand 3/3 Fine Sand 4/4 Fine Sand 5/4 Fine Sand my Fine Sand (Moist) /8 & 10YR 6/2 Redox	Inches Sons Encountered			
59" Dej	epth To End Of Soil C	bservation Or Redox		Depth T	o End Of Soil	Observation Or Redox
	evation Of Observation	tion Of Observation Relative To System		To System Elevation Of Observation Relative To System		
	epth To Bottom Of D	stribution Media	Depth To Bottom Of Distribution Media			
=34" Of Separation				Of Sepa	iration	
End Of 9	Soil Observation At:	65"	End Of	Soil Oh	servation At:	
2.10 01 0	Redox Present At:		2 51		x Present At:	
Standing Water Present At: None		Standing Water Present At:				
3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3						

Bottom Of Distribution Medium At: 25 Inches			
Signature:	Offer the		

LOGS OF SOIL BORINGS **SOI TO BERON AVE

	made by Tom B Date 4-26-97	_ Hand	bucket auger USDA - SCS Soil Classification
Depth in Inches	Boring Number 1 Surface Elev. 45"	Depth in Inches	Boring Number 2 Surface Elev. 25"
0-5	Top soil 4/2 loyr	0-5	TOP SOIL 4/2 10YR
5-36	70 70 912 113 12 2 2 2	5-24	
36-50	6/6 loyr FINE SAND	24-46	5/4 10 YR FINE SAND
50-66		46-54	MOTTLED
66-70	4/6 W/7/16RBYS & REDS		
	MOTTLED		•
 ;			
Standir	poring at 70 inches	Standir	poring at <u>54</u> inches ng water table:
Present Standin	esent atinches of depth,hours after boring. Present atinches of depth,hours after		atinches of depth,hours after boring. g water not present in hole
Mottled	Soil: ed at 66 inches of depth.	Mottled	Soil: , , ed at 46 inches of depth.
	soil not present in bore hole		soil not present in bore hole
Depth in Inches	Boring Number 3 Surface Elev. 23"	Depth in	Boring Number 4 Surface Elev. 70"
Depth in Inches	Boring Number 3 Surface Elev. 23" 4/2 /ove Top Soil		Boring Number 4 Surface Elev. 70" 4/2 10 YR Top Soil
in Inches	4/2 loye top soil	in Inches	
in Inches	4/2 JOYR TOP SOIL 4/4 JOYR MEDIUM FINE SAND 5/4 JOYR FINE SAND	o-8 8-36 36-39	4/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SANDY CLAY
in Inches 6-8 8-30 30-39	4/2 JOYR TOP SOIL 4/4 JOYR MEDIUM FINE SAND 5/4 JOYR FINE SAND	o-8 8-36 36-39	5/4 loyr FINE SAND
in the factor of	4/2 JOYR TOP SOIL 4/4 JOYR MEDIUM FINE SAND 5/4 JOYR FINE SAND	o-8 8-36 36-39	4/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SANDY CLAY
in the factor of	4/2 10YR TOP SOIL 4/4 10YR MEDIUM FINE SAND 5/4 10YR FINE SAND 4/6 10YR SILTY FINE SAND	o-8 8-36 36-39	4/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SANDY CLAY 5/6 loyr SAND
in the factor of	4/2 10YR TOP SOIL 4/4 10YR MEDIUM FINE SAND 5/4 10YR FINE SAND 4/6 10YR SILTY FINE SAND	o-8 8-36 36-39	4/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SANDY CLAY 5/6 loyr SAND
in the factor of	4/2 10YR TOP SOIL 4/4 10YR MEDIUM FINE SAND 5/4 10YR FINE SAND 4/6 10YR SILTY FINE SAND	o-8 8-36 36-39	4/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SANDY CLAY 5/6 loyr SAND
in Inches 6-8 8-30 30-39 39-51	4/2 JOYR TOP SOIL 4/4 JOYR MEDIUM FINE SAND 5/4 JOYR FINE SAND 4/6 JOYR SILTY FINE SAND OBSTRUCTION SOME ROCKS	in Inches 0 - 8 8 - 36 36 - 39 39 - 70	4/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SANDY CLAY 5/6 loyr SAND Some Rocks
in Inches 6-8 8-30 30-39 39-51	4/2 10YR TOP SOIL 4/4 10YR MEDIUM FINE SAND 5/4 10YR FINE SAND 4/6 10YR SILTY FINE SAND	9-70 End of t	4/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SANDY CLAY 5/6 loyr SAND Some Rocks
in Inches 6-8 8-30 30-39 39-5/ 51" End of I Standir Present Standin	1/2 /oyr top soil 1/4 /oyr medium fine sand 5/4 /oyr fine sand 4/6 /oyr silty fine sand OBSTRUCTION Some Rocks oring at	8-36 36-39 39-70 End of the Standing Present Standing	1/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SAND CLAY 5/6 loyr SAND Some Rocks coring at
in Inches 6-8 8-30 30-39 39-5/ 5/ Standir Present Standin Mottled	1/2 /oyr top soil 1/4 /oyr medium fine sand 5/4 /oyr fine sand 4/6 /oyr silty fine sand OBSTRUCTION Some Rocks oring at	End of to Standing Mottled	1/2 loyr Top Soil 5/4 loyr FINE SAND 4/6 loyr SAND CLAY 5/6 loyr SAND Some Rocks coring at

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems

Non-transferable

Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2019

Issued: 11/20/2018

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expires:
C9633	Anthony P Scully	3/5/2020
	Installer, Designer (Apprentice)	
C5342	Brian L Humpal	10/15/2023
	Installer, Maintainer, Serv Prov, Adv	Designer, Adv Inspector
C9852	Christopher R Uebe	3/4/2021
	Designer, Inspector	



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Mich Haig

Nick Haig, Supervisor Certification and Training Unit