


SSTS MAINTENANCE REPORT



System Location	
Address <u>8244 27th St N</u>	Telephone Number
City <u>Lake Elmo</u>	State <u>MN</u> ZIP <u>55042</u> Property ID No./GEO Code
Owner <u>Dennis Seiger</u>	Pumping Date <u>10/16/15</u>
Contractor	
Maintainer <u>MEYER SEWER</u>	MPCA License No. <u>915</u> Telephone Number <u>651-459-016</u>

What was done to the system?

Tank(s) Pumped

Sludge and scum measured.

Do tanks need to be pumped?

Yes No (If no provide measurements below)

Report Liquid Capacity in Gallons

Tank 1: 1500 Pumped Tank 2: Pumped

Tank 3: Pumped Tank 4: Pumped

Total Gallons Pumped: 1500

Visual Inspection (note any problems with the system):

NOTE: This does not serve as a compliance inspection

***Tank Measurements-Use Only if Tank(s) Were NOT Pumped**

Tank Length in. Tank Width in. Tank Depth in. = Tank Volume (cubic inches)

Tank Radius in. Tank Radius in. 3.14 = Tank Volume (cubic inches)


Tank Volume (cu. in.) / 231.01 = Liquid Capacity Gallons / Tank Depth in. = Gallons/Inch

Sludge Level in. Gallons Per Inch = Sludge Volume Gallons

Scum Level in. Gallons Per Inch = Scum Volume Gallons

Sludge Volume + Scum Volume = Total Sludge and Scum Volume Gallons

Total Sludge and Scum Volume / Liquid Capacity = Percent Sludge and Scum in Tank %

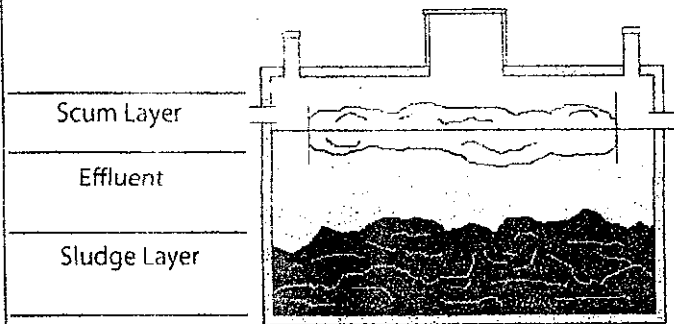

Tank Depth measured from invert of outlet pipe to bottom of tank

*Tanks must be pumped if either of the following conditions exist:
 1. The top of the sludge layer is less than 12 inches from the bottom of the outlet baffle; or
 2. Total sludge and scum volume is greater than 25 percent of the tank's liquid capacity.