
orings are made in order to determine the nd structure of soils at various depths as the location of the water table, imporvious or bedrock.

is are most easily made with a hand auger, er other expedients may be utilized - back post hole auger, etc.

encountered at various depths should be listed appearance, texture and composition.

at which water, bedrock or heavy clay layer countered should be recorded.

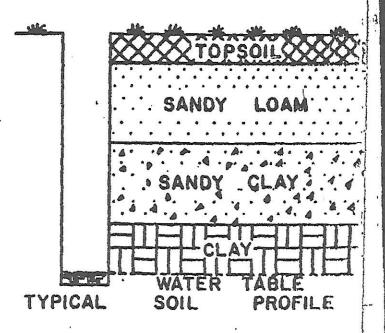

## LOG OF SOIL BORING

BURING		NU
Depth in Feet	De	Soil scription
	-	
	-	Black loam
2	16 -	
3	_	BROWN CLAY LOAM
4	4° -	
	•	-,
6	_	YEllowish BROWN Silty SANDY loAm
	-	
	7º -	o Bstruction
8	-	