
prings are made in order to determine the nd structure of soils at various depths as the location of the water table, imporvious or bedrock.

s are most easily made with a hand auger, er other expedients may be utilized - back bost hole auger, etc.

encountered at various depths should be listed appearance, texture and composition.

at which water, bedrock or heavy clay layer ountered should be recorded.

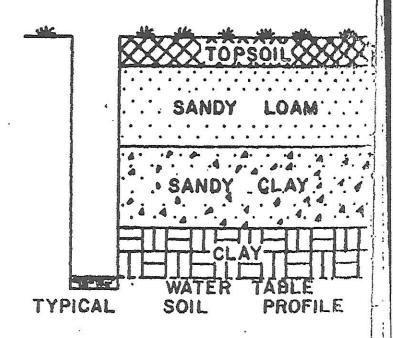

LOG OF SOIL BORING

BORING NO/	
Depth Soil Feet Description	
- Black Loam	
2	and the state of t
3 BROWN Clay LOAM	
<u>l</u> s 4°	
5	- Oan John
- TEILOWISH BROWN SILTY - SIN - (Friely High Clay content	(*)
- OBSTRUCTION	
	1
8	