Inspect Minnesota & Midwest Soil Testing

P.O. Box 383 Hugo, MN 55038

Brian Humpal

651-492-7550/Brian@midwestsoiltesting.com

MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 3524 Long Lake Rd, Pine Springs, MN 55128

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This system consists of two pre-cast septic tanks and a rock trench drainfield.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Brian Humpal Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply. Submit completed form to Local Unit of Government (LUG) and system owner within 15 days	For local tracking purposes:
•	
System Status	
System status on date (mm/dd/yyyy): _8/18/2016	
— · · —	npliant – Notice of Noncompliance rade Requirements on page 3)
Reason(s) for noncompliance (check all applicable)	
 ☐ Impact on Public Health (Compliance Component #1) – Imminent threat to ☐ Other Compliance Conditions (Compliance Component #3) – Imminent thr ☐ Tank Integrity (Compliance Component #2) – Failing to protect groundwat ☐ Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwat ☐ Soil Separation (Compliance Component #4) – Failing to protect groundwat ☐ Operating permit/monitoring plan requirements (Compliance Component #4) 	eat to public health and safety er otect groundwater ater
Property Information Parcel ID# or Sec/Twp/Range	ie.
	or inspection: Property Sale
• • •	phone: 612-720-4153
or	
•	stative phone:
Local regulatory authority: Washington County Regulator Brief system description: Two pre-cast septic tanks and a rock trench drainfield.	ry authority phone: 651-430-4052
Comments or recommendations:	
Certification	
I hereby certify that all the necessary information has been gathered to determine the o	compliance status of this system. No
determination of future system performance has been nor can be made due to unknow possible abuse of the system, inadequate maintenance, or future water usage.	
Inspector name: Brian Humpal Certification	on number: L5342
	se number: L2896
Inspector signature: Brian Humpal Pho	ne number: 651-492-7550
Necessary or Locally Required Attachments	
	local ordinance
☐ Other information (list): Report Summary, Property Information, Disclaimer, Lice	

1.	Impact on Public Health - Compliance component #1 of 5					
	Sy gro Sy or Sy dw An	estem discharge sewage to the bund surface. Testem discharge sewage to drain tile surface waters. Testem cause sewage backup into welling or establishment. The pure of the above found.		⊠ No ⊠ No stem is	\boxtimes	Searched for surface outlet Searched for seeping in yard/backup in home Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation) "Black soil" above soil dispersal system System requires "emergency" pumping Performed dye test Unable to verify (See Comments/Explanation) Other methods not listed (See Comments/Explanation)
2.	Ta	ank Integrity — Compliance con	nponent	#2 of 5		
3.	Syce Secon Sede de If y	restem consists of a seepage pit, sspool, drywell, or leaching pit. repage pits meeting 7080.2550 may be impliant if allowed in local ordinance. rewage tank(s) leak below their signed operating depth. res, which sewage tank(s) leaks: remy "yes" answer above indicated and in the impliant is allowed in local ordinance. remy "yes" answer above indicated and in the impliant is allowed in local ordinance. remy "yes" answer above indicated and in the impliant is allowed in local ordinance. remy "yes" answer above indicated and in the impliant is allowed in local ordinance.	oundwa	No nter. nd tank walls	⊠ □ □ □ ⊠	
	a. b.	Maintenance hole covers are damaged Other issues (electrical hazards, etc.) to i *System is an imminent threat to put Explain: System is non-protective of ground was	immediate <i>ublic heal</i> :	ly and advers th and safety	sely impact	public health or safety. ☐ Yes* ☒ No ☐ Unknown
		*System is failing to protect ground Explain:				

Property address: 3524 Long Lake Rd, Pine Springs, MN 55128

Inspector initials/Date: 8/18/2016

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • 3 off9TY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Date of installation: 1999	_ Unkr	nown	Verification method(s):		
Shoreland/Wellhead protection/Food Beverage Lodging?		☐ No	Soil observation does not expire. Previ		
Compliance criteria:			observations by two independent partie unless site conditions have been altere		
For systems built prior to April 1, 1996, and	☐ Yes	□ No	requirements differ.		
not located in Shoreland or Wellhead Protection Area or not serving a food,			☐ Conducted soil observation(s) (Atta	/	
beverage or lodging establishment:			☐ Two previous verifications (Attach b☐ Not applicable (Holding tank(s), no dr		
Drainfield has at least a two-foot vertical			Unable to verify (See Comments/Explanation)		
separation distance from periodically saturated soil or bedrock.			○ Other (See Comments/Explanation)		
Non-performance systems built April 1,	⊠ Yes	□ No	Comments/Explanation:		
1996, or later or for non-performance systems located in Shoreland or Wellhead			Reviewed design and permit records.		
Protection Areas or serving a food,					
beverage, or lodging establishment:					
Drainfield has a three-foot vertical separation distance from periodically					
saturated soil or bedrock.*					
"Experimental", "Other", or "Performance"	☐ Yes ☐	□No	Indicate depths of elevations		
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080.				See Attached	
2350 or 7080.2400 (Advanced Inspector			A. Bottom of distribution media	Boring Log(s)	
License required)			B. Periodically saturated soil/bedrock		
Drainfield meets the designed vertical separation distance from periodically			C. System separation		
saturated soil or bedrock.					
Any "no" answer above indicates t	the svst	em is	D. Required compliance separation* *May be reduced up to 15 percent if all	owed by Local	
*May be reduced up to 15 percent if allowed by Local Ordinance.			owed by Local		
A 11 B 14 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	MP* – C	Compliance	component #5 of 5 Not application	able	
. Operating Permit and Nitrogen B			7		
Is the system operated under an Operating Per	rmit?	☐ Yes [☑ No If "yes", A below is required		
		☐ Yes [<u> </u>		
Is the system operated under an Operating Per	MP?	☐ Yes [☑ No If "yes", B below is required		
Is the system operated under an Operating Per Is the system required to employ a Nitrogen BN	MP? fied in the	☐ Yes [⊠ No If "yes", B below is required		
Is the system operated under an Operating Per Is the system required to employ a Nitrogen BN BMP=Best Management Practice(s) specific	MP? fied in the	☐ Yes [⊠ No If "yes", B below is required		
Is the system operated under an Operating Per Is the system required to employ a Nitrogen BN BMP=Best Management Practice(s) specific of the answer to both questions is "no",	MP? fied in the	☐ Yes [No If "yes", B below is required ign not need to be completed.		
Is the system operated under an Operating Per Is the system required to employ a Nitrogen BN BMP=Best Management Practice(s) specific fithe answer to both questions is "no", Compliance criteria	MP? fied in the , this sec	☐ Yes [system desi	⊠ No If "yes", B below is required		

ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect

800-657-3864 wq-wwists4-31 • 1/24/12 Page 3 of 3


Property address: 3524 Long Lake Rd, Pine Springs, MN 55128

Inspector initials/Date: 8/18/2016

Inspect Minnesota & Midwest Soil Testing

Subsurface Sewage Treatment System Owner/Property Information This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: August 18, 2016	Time: 2:30 PM				
Property Address: 3524 Long Lake Rd, Pine Springs, MN	Zip: 55128				
Property Owner: Brian & Ruby Buchmayer	Phone: 612-720-4153				
Tank(s) Tank(s)Material Soil Treatment System	Other				
Septic 2	Alternative system Experimental system Cesspool system Other system				
Are the tank maintenance covers accessible? Yes No *If performed through the maintenance holes. Maintenance hole cover the ground surface to facilitate access and proper maintenance of the second surface.	ers should be made accessible to				
Year house built: 1945 Year septic installed: 1999	Γank size (gals.): 2-1000				
	sidents in home?				
Number of bedrooms? 2 Are all floors drained by g					
Garbage disposal? Whirlpool bath?					
More than one system (laundry, etc.)?					
Does this property have any footing drain tiles connected to the se	ptic system?				
Are any buildings on this property such as garages or out-buildings connected to this system?					
Are there any additional systems on this property serving other buildings?					
Location of septic system on lot? South Side					
	e well a deep well? Y				
Have you ever experienced any problems with the system such as: surfacing of sewage onto the ground, septic tank overflowing, etc. to the system? If yes, explain:					
When was the system last pumped? Name of pum	per:				
	on a monitoring plan?				
Have you received notices from any government agency concerning	ng this system?				
Is your property located in a shoreland management area? Y					
Do you have any additional information that should be given to th	e new owner?				
I hereby certify that the above information is correct to the best of my knowledg considered "non-compliant/failing" per MPCA rules, that the inspector must by local government unit within 15 days of the date of inspection completion. I a this report, that I/we are ultimately responsible for payment of all fees for all we by Inspect Minnesota and Midwest Soil Testing.	law submit a copy of this report to the lso agree that unless otherwise noted in				
Owner/Occupant:	Date:				

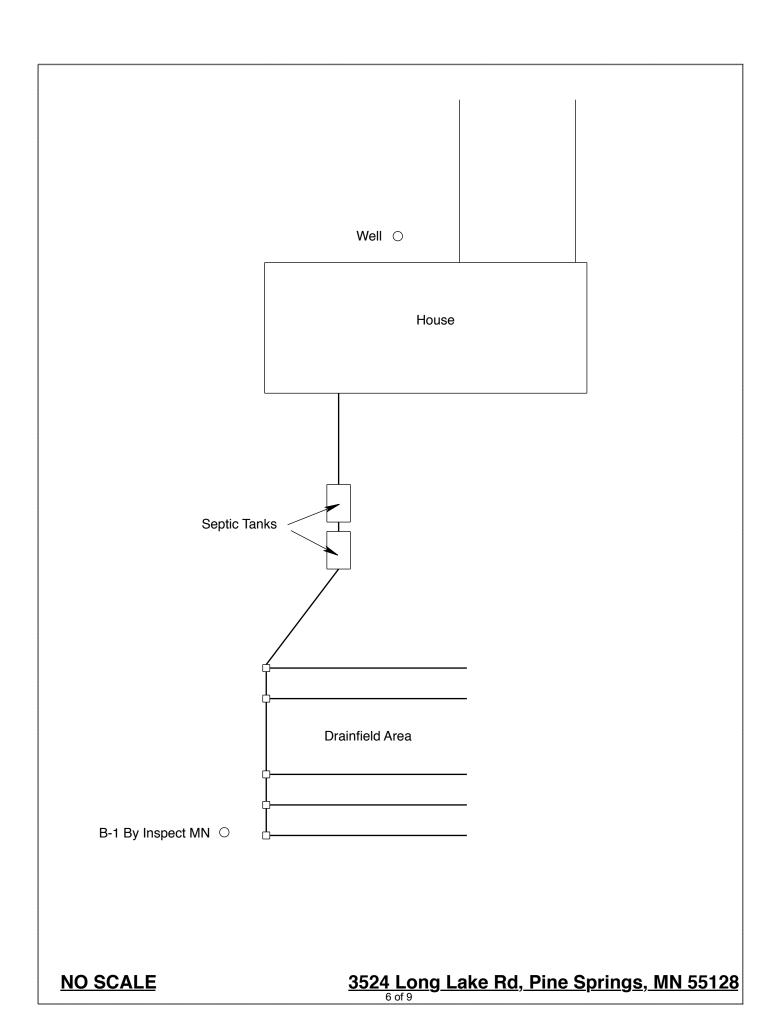

Log Of Soil Borings

Location of Project: 3524 Long Lake Rd, Pine Springs, MN 55128					
Borings Made By: Inspect Minnesota				Date:	8/18/16
Auger Used: Hand/Bucket			Classi	fication System:	USDA
	Boring Number:	1	Boring Number:		
Surface Elevation of Boring Same ground surface as last drainfield trench		Surface Elevation of Boring	of		
Depth In Inches	Depth In Soils Encountered		Depth In Inches	Soils Encountered	
0-8 8-30 30-45 45-73	10YR 5, 10YR 5, 10YR 4/3 Mediu	/2 Silt Loam /4 Silt Loam /4 Fine Sand Im Sand With Gravel Rock Fragments			
73"	Depth To End Of B	oring Or Redox	[Depth To End Of Bo	oring Or Redox
Same	Elevation Of Boring	g Relative To System	E	Elevation Of Boring	Relative To System
-31" Depth To Bottom Of Distribution Media				f Distribution Media	
≥42" Of Separation		(Of Separation		
	End Of Boring At:	73"		End Of Boring At:	
	Redox Present At:	None		Redox Present At:	
Standing Water Present At: None			Water Present At:		

Bottom Of Distribution Medium At: 31 Inches

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Sulbsurface Sewage Treatment Systems

Non-transferable



License # L2896

Maintainer License Expires:

Adv Inspector License Expires:

Oct 28, 2015 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016

Adv Designer License Expires:

Date of Issuance:

Installer License Expires:

Certification

Inspect Minnesota, Midwest Soil Testing

Expires

10/15/2017 10/15/2017

Advanced Designer (Certified) Advanced Inspector (Certified)

Maintainer (Certified)

Certification Type

Designated Certified

Individual (DCI) Brian L. Humpal Brian L. Humpal Brian L. Humpal Brian L. Humpal Brian L. Humpal

10/15/2017

10/15/2017

10/15/2017

Service Provider (Certified)

Installer (Certified)

Designer (Certified) Inspector (Certified)

Christopher R. Uebe Christopher R. Uebe

03/04/2018

03/04/2018

Steven Giddings Manager Environmental Business Assistance Section



Minnesota Pollution Control Agency

520 Lafayette Road North St. Paul, Minnesota 55155-4194