Inspect Minnesota & Midwest Soil Testing

P.O. Box 383 Hugo, MN 55038

Brian Humpal

651-492-7550/Brian@midwestsoiltesting.com

MPCA Licensed Designer & Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM COMPLIANCE REPORT

Inspection Address: 12590 127th St S, Denmark Twp, MN 55033

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this septic system and have reviewed the original design/permit records on file at Washington County. This very old system (installed in 1979) consists of two pre-cast septic tanks and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(E) because of the lack of the required two foot separation between the bottom of the drainfield and seasonally saturated soils. This system is not an imminent threat to public health or safety per MPCA rule 7080.1500 Subp. 4(A). Washington County issued sewage treatment permit #2074 for the installation of this septic system.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact Washington County Environmental Specialist, Mr. Chris LeClair (651-430-4052), to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days	
System Status	
System status on date (mm/dd/yyyy): 8/23/2016	
_ ·	mpliant – Notice of Noncompliance grade Requirements on page 3)
Reason(s) for noncompliance (check all applicable)	
 ☐ Impact on Public Health (Compliance Component #1) – Imminent threat the Component #3) – Imminent the Compliance Compliance Component #3) – Imminent the Tank Integrity (Compliance Component #2) – Failing to protect groundwath Compliance Compliance Component #3) – Failing to protect groundwath Component (Compliance Component #4) – Failing to protect groundwath Component (Compliance Component Poperating permit/monitoring plan requirements (Compliance Component Componen	reat to public health and safety ter otect groundwater vater
Property Information Parcel ID# or Sec/Twp/Ran	ge:
	for inspection: Property Sale
	phone: 952-426-8692
Owner's representative: Represe	ntative phone:
•	ry authority phone: 651-430-4052
Brief system description: Two pre-cast septic tanks and rock trench drainfield.	<u></u>
Comments or recommendations:	
Certification	
I hereby certify that all the necessary information has been gathered to determine the determination of future system performance has been nor can be made due to unknow possible abuse of the system, inadequate maintenance, or future water usage.	
Inspector name: Brian Humpal Certification	tion number: L5342
	nse number: _L2896
Inspector signature: Brian Humpal Pho	one number: 651-492-7550
Necessary or Locally Required Attachments	
	local ordinance
☑ Other information (list): Report Summary, Property Information, Disclaimer, Li	

1.	Impact on Public Health – Compliance component #1 of 5					
	Compliance criteria:		Verification method(s):			
	System discharge sewage to the ground surface.		Searched for seeping in yard/backup in home			
	System discharge sewage to drain tile or surface waters.	☐ Yes ⊠ No	 Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation) "Black soil" above soil dispersal system 			
	System cause sewage backup into dwelling or establishment.	☐ Yes ⊠ No	System requires "emergency" pumping Performed dye test			
	Any "yes" answer above indicate an Imminent Threat to Public Hea	es the system is Unable to verify (See Comments/Explanation)				
	Comments/Explanation: None of the above found.					
2.	Tank Integrity – Compliance cor	nponent #2 of 5				
	Compliance criteria:		Verification method(s):			
	System consists of a seepage pit,	☐ Yes ⊠ No	□ Probed tank(s) bottom □			
	cesspool, drywell, or leaching pit.		☐ Examined Construction records			
	Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.		Examined Tank Integrity Form (Attach)Observed liquid level below operating depth			
	Sewage tank(s) leak below their designed operating depth.	☐ Yes ⊠ No	☐ Examined empty (pumped) tanks(s)			
	If yes, which sewage tank(s) leaks:		Probed outside tank(s) for "black soil"			
	Any "yes" answer above indicasystem is Failing to Protect Gr	er above indicates the				
	Comments/Explanation:					
	Lowered underwater camera into tanks	- baffles and tank wa	lls OK.			
3.	Other Compliance Conditions	S – Compliance co	mponent #3 of 5			
	•	·				
	 a. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. Yes* No Unknown b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. Yes* No Unknown *System is an imminent threat to public health and safety 					
	Explain:	abne neural and sure	y			
	c. System is non-protective of ground water for other conditions as determined by inspector					
	r ·					

Property address: _ 12590 127th St S, Denmark Twp, MN 55033

Inspector initials/Date: 8/23/2016

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • 3 of TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

1.	Soil Separation – Compliance compor	nent #4 c	of 5				
	Date of installation: 1979 Shoreland/Wellhead protection/Food Beverage Lodging?	Unkr		S	erification method(s):		
	Compliance criteria:			uı	observations by two independent parties are sufficient, unless site conditions have been altered or local		
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes	⊠ No		requirements differ. Conducted soil observation(s) (Attach boring lo Two previous verifications (Attach boring logs) Not applicable (Holding tank(s), no drainfield)		
	Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.			☐ Unable to verify (See Comments/Explan ☐ Other (See Comments/Explanation)		Explanation)	
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes	□ No	C	omments/Explanation:		
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
	"Experimental", "Other", or "Performance"	☐ Yes ☐ No		In	dicate depths of elevations		
	systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			<u>A.</u>	Bottom of distribution media	See Attached Boring Log(s)	
	Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.				Periodically saturated soil/bedrock System separation		
				D.	Required compliance separation*		
	Any "no" answer above indicates the system is Failing to Protect Groundwater. *May be reduced up to 15 percent if allowed by Local Ordinance.						
5.	Operating Permit and Nitrogen B	MP* – C	Compliance	e com	ponent #5 of 5 🔀 Not app	licable	
	Is the system operated under an Operating Per	mit?	☐ Yes	⊠ No	If "yes", A below is required		
	Is the system required to employ a Nitrogen BMP?						
	BMP=Best Management Practice(s) specified in the system design						
If the answer to both questions is "no", this section does not need to be completed.							
	Compliance criteria						
	a. Operating Permit number:						
	Have the Operating Permit requirements been met?				☐ Yes ☐ No		
b. Is the required nitrogen BMP in place and properly functioning?					☐ Yes ☐ No		
	Any "no" answer indicates Noncom	pliance	-				

Property address: 12590 127th St S, Denmark Twp, MN 55033

Inspector initials/Date: 6/28/2016

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

•4 of **TTY** 651-282-5332 or 800-657-3864 • Available in alternative formats

wq-wwists4-31 • 1/24/12 Page 3 of 3

800-657-3864

www.pca.state.mn.us •

651-296-6300 •

OFFICE OF THE ZONING ADMINISTRATOR WASHINGTON COUNTY, MINNESOTA

Tel. 439-3220


PERMIT TO INSTALL SEWAGE DISPOSAL SYSTEM

W. / / STALL SEWAGE DISPOSAL SYSTEM	
OWNER MERCE ARNETSON (ARNIE'S BOWLING CENTER)	Permit No. <u>2074</u>
6500 Spo ADDRESS ELSO MINIMUM SYSTEM REQUIRED: 2600 April Bedrooms, Percolation Rate 15 Min/Inch	
Septic Tank 2. 3000 Tel Gal. Liquid Capacity Lift Station 1	J R Gal.
Distribution Box CONC. W/ REMOVABLE COURTOP Box	
Absorption Trench - Square Feet 2475 Lineal Feet 825 Wid	th_36"
Depth of Rock Below Tile Lines Inches, Above Tile Z Inches,	es ·
Depth of Trench - Minimum Cover Inches, Maximum Cover Inches	es .
Minimum Number of Lines Maximum Length of Individual Line O	OFt.
Recommended Number of Lines 90 92'	·
Minimum Spacing of Lines $\frac{7'/2}{}$ Ff. Center to Center.	
Inspection of Installation Must Be Accomplished By This Office Before Any Portion of Sy Special Conditions Live From BLOC. TO SEPTIC TANK TO BE COST IMON.	WATER METER TO
E INSTALLED PRIOR TO OCCUPANCY. IF WAREN USE MONITORING	DETERMINES THO
HODITIONAL COPACITY MUST BE INSTACLED D	4 Bu DAY PERLION
MODITIONAL COPACITY MUST BE INSTALLATION, DE DETAILS ATTACHED	
9-5-79 inspect - 4 fine - O.K.	
System Inspected 9-6-79 DATE	
DATE	
Installation Approved Kurs Cuedar 2000	
INSPECTOR	•
Comments	
PERMIT: Permission is hereby granted to the above named applicant to perform the work described pecifications shown under minimum system required. This permit is granted upon express condition granted, and his agents, employees and workmen shall conform in all respects to ordinances of Washington the permit shall be void if the permit was permit shall be void if the permit was permit shall be void if the permit shall be void if the permit was permit shall be void if the permit was permit when the permit shall be void if the permit was permit when the permit was permit was permit when the permit was permit when the permit was permit when the permit was permit with the permit was permit when the permit was permit was permit when the permit was permit when the permit was permit was permit when the permit was permit was permit when the permit was permit was permit when the permit was permit when the permit was permit when the permit was permit was permit when the permit was permit when the permit was pe	that the person to whom it is
6) months. Installer must hold current Septic Installer License with Washington County.	
Approved: Accelor	Do The 7A
V COMING A DIMINISTRATOR!	

Inspect Minnesota & Midwest Soil Testing

Subsurface Sewage Treatment System Owner/Property Information This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: 6/28/16 & 8/23/16	Time: 9:30 AM				
Property Address: 12590 127th St S, Denmark Twp, MN	Zip: 55033				
Property Owner: Dave McIntosh	Phone: 952-426-8692				
Tank(s) Tank(s)Material Soil Treatment System Septic 2 Fiberglass ⊠Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding ⊠Concrete Seepage bed Other: Block Mound Other At-grade	Other Alternative system Experimental system Cesspool system Other system				
Are the tank maintenance covers accessible? Yes No *If performed through the maintenance holes. Maintenance hole cover the ground surface to facilitate access and proper maintenance of the surface to facilitate access and proper maintenance of the surface to facilitate access and proper maintenance of the surface of	ers should be made accessible to				
Year house built: 1979 Year septic installed: 1979	Γank size (gals.): 2-3000				
	sidents in home?				
Number of bedrooms? N/A Are all floors drained by g	ravity? Y				
Garbage disposal? Whirlpool bath?					
More than one system (laundry, etc.)?					
Does this property have any footing drain tiles connected to the se	ptic system?				
Are any buildings on this property such as garages or out-building	s connected to this system?				
Are there any additional systems on this property serving other bu	ildings?				
Location of septic system on lot? East Side					
	e well a deep well? Y				
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:					
When was the system last pumped? June 2016 Name of pumper: Meyer's Sewer Service					
How often pumped in previous years?					
Have you received notices from any government agency concerning this system?					
Is your property located in a shoreland management area? N					
Do you have any additional information that should be given to the new owner?					
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.					
Owner/Occupant:	Date:				

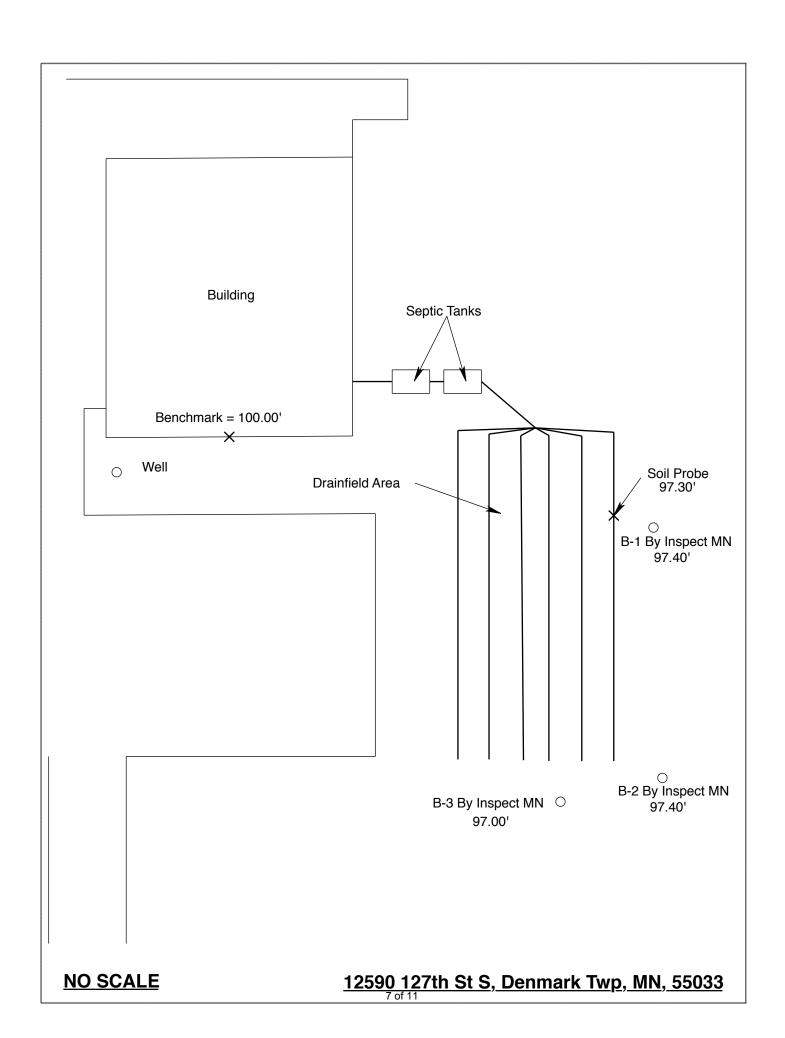

Log Of Soil Borings

Location of Project: 12590 127th St S, Denmark Twp, MN 55033						
Borings Made By: Inspect Minnesota					Date:	6/28/16
	Auger Used:	Hand/Bucket	Class	ifica	ation System:	USDA
Во	oring Number:	1		Boring Number:		2
Surface		97.40'	Surface	;		
Elevation of	Benchmark	= 100.00' at front	Elevation	of		97.40'
Boring	door	threshold	Boring			
Depth In Inches	Soils Er	ncountered	Depth In Inches		Soils E	<u>ncountered</u>
0-24 24-54 54-65	10YR 4/ 10YR 5/4 Lc 7.5YR 4/4 Sand Bedrock	2 Silt Loam 3 Silt Loam eamy Sand With y Loam Layers And Fragments 65" Bedrock	0-22 22-49 49-57 57-63 63-73		10YR 4, 10YR 5/3 Loam 10YR 5/4 10YR 5/4 Me 10YR 4/4 L Bedrock	/2 Silt Loam /3 Silt Loam ry Fine Sand (Moist) Medium Sand edium Sand With roam Layers And refragments refragments refragments
93.22' Elevation To Bottom Of Distribution Media		93.22'	Elev	vation To Bottom	Of Distribution Media	
-91.98' Depth To Redox Or End Of Boring			_	oth To Redox		
1.24'/15" Of Separation		=1.9'/23"	Of S	Separation		
End Of Boring At: 65"			Fn	d Of Boring At:	73"	
Bedrock Present At: 65"/91.98'		R		ock Present At:	73"/91.32'	
Standing Water Present At: None				iter Present At:	None	

Bottom Of Distribution Medium At: 49" Or Elevation 93.22' At Soil Probe

Log Of Soil Borings

Location of Project: 12590 127th St S, Denmark Twp, MN 55033						
Borings Made By: Inspect Minnesota		Date:		6/28/16		
	Auger Used: Hand/Bucket		Class	ification System:	USDA	
E	Boring Number:	3		Boring Number:		
Surface		97.00'	Surface			
Elevation o	of Benchmark	= 100.00' at front	Elevation	of		
Boring	door	threshold	Boring			
Depth In	Soils Er	ncountered	Depth In	Soils E	ncountered	
Inches			Inches			
0-26 26-43 43-57 57-63	10YR 4/ 10YR 6/3 Loam 10YR 5/6 F Bedrock	2 Silt Loam 3 Silt Loam y Fine Sand (Moist) ine Sand With Fragments 63" Bedrock				
93.22' E	levation To Botton	n Of Distribution Media		Elevation To Bottom	Of Distribution Media	
-91.75' Depth To Redox Or End Of Boring			Depth To Redox			
1.47'/18" Of Separation			Of Separation			
	End Of Boring At-	63"		End Of Boring At:		
End Of Boring At: 63" Bedrock Present At: 63"/91.75'			Redox Present At:			
Standing Water Present At: None		Standing Water Present At:				
Standing Water Fresent At. None Stan			Stariding	acci i i cociie Aci		

Bottom Of Distribution Medium At: 49" Or Elevation 93.22' At Soil Probe

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Sulbsurface Sewage Treatment Systems

Non-transferable



License # L2896

Maintainer License Expires: Installer License Expires: Date of Issuance:

Adv Inspector License Expires:

Oct 28, 2015 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016

Adv Designer License Expires:

Inspect Minnesota, Midwest Soil Testing

Certification

Expires

10/15/2017 10/15/2017 10/15/2017 10/15/2017 10/15/2017

tified	E
d Ce	9
gnate	vidua
Desi	Indi

Brian L. Humpal

Brian L. Humpal

Advanced Designer (Certified) Advanced Inspector (Certified)

Maintainer (Certified)

Certification Type

Brian L. Humpal

Brian L. Humpal

Christopher R. Uebe Brian L. Humpal

Christopher R. Uebe

Service Provider (Certified) Installer (Certified)

Designer (Certified)

Inspector (Certified)

03/04/2018 03/04/2018

Environmental Business Assistance Section Steven Giddings Manager



Minnesota Pollution Control Agency

520 Lafayette Road North St. Paul, Minnesota 55155-4194