#### **Midwest Sewer Services**

P.O. Box 10853 White Bear Lake, MN 55110

Brian Humpal

651-492-7550/Brian@Midwestsoiltesting.com

MPCA Licensed Advanced Inspector

#### SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 14315 Oldfield Rd N, May Twp, MN 55082

#### **REPORT SUMMARY**

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This system (installed in 1979) consists of a pre-cast septic tank, a pre-cast lift tank, and a rock trench drainfield. Pinky's Sewer Service pumped the tanks on September 9, 2024.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Midwest Sewer Services have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Midwest Sewer Services disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Christopher Uebe

Brian Humpal

Brian Humpal



520 Lafayette Road North St. Paul, MN 55155-4194

## Compliance inspection report form

#### **Existing Subsurface Sewage Treatment System (SSTS)**

Doc Type: Compliance and Enforcement

Instructions: Inspector must submit completed form to Local Governmental Unit (LGU) and system owner within 15 days of final determination of compliance or noncompliance. Instructions for filling out this form are located on the Minnesota Pollution Control Agency (MPCA) website at <a href="https://www.pca.state.mn.us/sites/default/files/wq-wwists4-31a.pdf">https://www.pca.state.mn.us/sites/default/files/wq-wwists4-31a.pdf</a>.

Property information	Local tracking number:			
Parcel ID# or Sec/Twp/Range:	Reason for Inspection Property Transfer			
Local regulatory authority info: Washington County				
Property address: 14315 Oldfield Rd N, May Twp, MN 55082				
Owner/representative: Paul & Betty Rivard	Owner's phone: 612-669-3494			
Brief system description: A pre-cast septic tank, a pre-cast lift ta	ank, and a rock trench drainfield.			
System status				
System status on date (mm/dd/yyyy): 9/9/2024				
	☐ Noncompliant – Notice of noncompliance			
(Valid for 3 years from report date unless evidence of an imminent threat to public health or safety requiring removal and abatement under section 145A.04, subdivision 8 is discovered or	Systems failing to protect ground water must be upgraded, replaced, or use discontinued within the time required by local ordinance.			
a shorter time frame exists in Local Ordinance.)	An imminent threat to public health and safety (ITPHS) must be			
*Note: Compliance indicates conformance with Minn. R. 7080.1500 as of system status date above and does not	upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance or under section 145A.04 subdivision 8.			
guarantee future performance.	-1-1			
Reason(s) for noncompliance (check all applicate	•			
Impact on public health (Compliance component #1) – Immi				
Tank integrity (Compliance component #2) – Failing to prote	•			
Other Compliance Conditions (Compliance component #3) -	•			
Other Compliance Conditions (Compliance component #3) -				
System not abandoned according to Minn. R. 7080.2500 (Co				
Soil separation (Compliance component #5) – Failing to protect	_			
Operating permit/monitoring plan requirements (Compliance	component #4) – Noncompliant - local ordinance applies			
Comments or recommendations				
Certification				
	to determine the compliance status of this system. No determination of wn conditions during system construction, possible abuse of the system,			
	e and correct, to the best of my knowledge, and that this information can be			
Business name: Midwest Sewer Services	Certification number: 5342/9852			
<b>a</b>	Solution number. 0042/0002			
Inspector signature: Sian Humpal (After 1)	License number: L2896			
(This document has been electronically sign	ned) Phone: 651-492-7550			
Necessary or locally required supporting do	cumentation (must be attached)			
Soil observation logs	quired forms			
$\  \  \  \  \  \  \  \  \  \  \  \  \  $	ition, Disclaimer			

	dress: 14315 Oldfield Rd N, May Twp, MN 55082 me: Midwest Sewer Services	Date: 9/9/2024
Other	compliance conditions – Compliance component #3 of 5	
3a. Mai □ Y 3b. Oth	intenance hole covers appear to be structurally unsound (damaged, cracked, etc.), or unseres No Unknown her issues (electrical hazards, etc.) to immediately and adversely impact public health or safe	
	es to 3a or 3b - System is an imminent threat to public health and safety.  Stem is non-protective of ground water for other conditions as determined by inspector?	☐ Yes* ⊠ No
3d. Sys	stem not abandoned in accordance with Minn. R. 7080.2500?  es to 3c or 3d - System is failing to protect groundwater.	☐ Yes* ☐ No
	scribe verification methods and results:	
Atta	ached supporting documentation: 🗵 Not applicable 🔲	
	ached supporting documentation:   Not applicable   ting permit and nitrogen BMP* – Compliance component #4	of 5 ⊠ Not applicable
. Opera	ating permit and nitrogen BMP* – Compliance component #4	
Is the sys	stem operated under an Operating Permit?	If "yes", A below is require
Is the sys	stem operated under an Operating Permit?	If "yes", A below is require
Is the sys	stem operated under an Operating Permit?	If "yes", A below is require
Is the system of the authors of the	stem operated under an Operating Permit?  Stem required to employ a Nitrogen BMP specified in the system design? Yes No  MP = Best Management Practice(s) specified in the system design  Inswer to both questions is "no", this section does not need to be completed ance criteria:	If "yes", A below is require If "yes", B below is require
Is the system of	stem operated under an Operating Permit?	If "yes", A below is require
Is the system of the automotion of the automotio	stem operated under an Operating Permit?	If "yes", A below is require

iness Name: Midwest Sewer Services		Date: 9/9/2024		
Soil separation – Compliance con	nponent #5 o	f 5		
Date of installation 1979 (mm/dd/yyyy)	Unknown			
Shoreland/Wellhead protection/Food beverage lodging?  Compliance criteria (select one):	⊠ Yes □ No	<ul> <li>✓ Soil observation logs completed for the report</li> <li>✓ Two previous verifications of required vertical separation</li> </ul>		
,	☐ Yes ☐ No*			
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.				
5b. Non-performance systems built April 1, 1996, or later or for non- performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	⊠ Yes □ No*	A. Bottom of distribution media  B. Periodically saturated soil/bedrock	See Attached Boring Log(s)	
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*		C. System separation  D. Required compliance separation*  *May be reduced up to 15 percent if allowed ordinance.	owed by Local	
5c. "Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules 7080. 2350 or 7080.2400 (Intermediate Inspector License required ≤ 2,500 gallons per day; Advanced Inspector License required > 2,500 gallons per day)	☐ Yes ☐ No*			
Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.				

**Upgrade requirements:** (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

800-657-3864

https://www.pca.state.mn.us wq-wwists4-31b • 4/28/2021


Describe verification methods and results:

# <u>Midwest Sewer Testing</u> <u>Subsurface Sewage Treatment System Owner/Property Information</u>

This information will be used for the purpose of conducting an M	IPCA Compliance Inspection.				
Date of Inspection: September 9, 2024	Time: 2:00 PM				
Property Address: 14315 Oldfield Rd N, May Twp, MN	Zip: 55082				
Property Owner: Paul & Betty Rivard	Phone: 612-669-3494				
Tank(s)       Tank(s)Material       Soil Treatment System         Septic 1       Fiberglass       Soil Treatment System         Aerobic       Plastic       Gravelless trench         Lift       Metal       Chamber trench         Holding       Concrete       Seepage bed         Other:       Block       Mound         Other       At-grade	Alternative system  Experimental system  Cesspool system  Other system				
Are the tank maintenance covers accessible? ⊠ Yes □ No					
performed through the maintenance holes. Maintenance hole					
the ground surface to facilitate access and proper maintenance	e of the system.				
Year house built: 1979 Year septic installed: 1979	Tank size (gals.): 1200				
	of residents in home?				
Number of bedrooms? 3 Are all floors drained by	, ,				
Garbage disposal? Whirlpool b	ath?				
More than one system (laundry, etc.)?					
Does this property have any footing drain tiles connected to the	ne septic system?				
Are any buildings on this property such as garages or out-buildings connected to this system?					
Are there any additional systems on this property serving other buildings?					
Location of septic system on lot? Tanks - South Side, Drainfie	eld - West Side				
L	s the well a deep well? Y				
Have you ever experienced any problems with the system such surfacing of sewage onto the ground, septic tank overflowing, to the system?  If yes, explain:					
	pumper: Pinky's Sewer Service				
How often pumped in previous years?					
Have you received notices from any government agency concerning this system?					
Is your property located in a shoreland management area? Y					
Do you have any additional information that should be given to the new owner?					
I hereby certify that the above information is correct to the best of my know considered "non-compliant/failing" per MPCA rules, that the inspector muslocal government unit within 15 days of the date of inspection completion.	st by law submit a copy of this report to the				

by Inspect Minnesota and Midwest Soil Testing

Owner/Occup	ant:	Date:

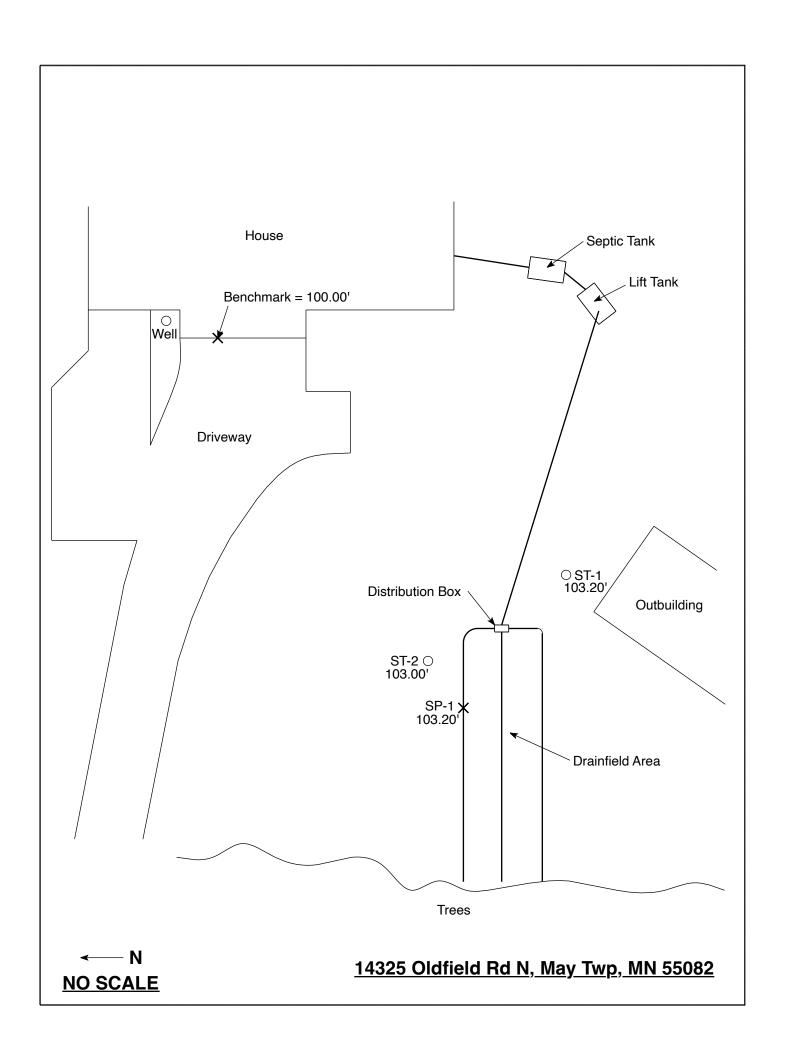

### **Soil Observations Log**

Location of Project: 14315 Oldfield Rd N, May Twp, MN 55082							
Observations Made By: Midwest Sewer Se				٠, ،٠	Date:	9/9/2024	
С	Classification System: USDA						
	Soil Observation: ST-1			Soil O	bservation:	ST-2	
Surf	Surface 103.20'		Surface				
Elevation of Benchmark = 100.00' garage		Elevation of 103.00'		103.00'			
Observation door threshold of overhead door		Observation					
Depth In Inches	Rock %	Soils E	ncountered	Depth In Inches	Rock %	Soils Encountered	
0-9 9-23 23-40 40-47 47-70 100.37 -97.37' ≥37/ End C	Depth 36" Of Soil C	7.5YR 4/ 7.5YR 4/4 Loal 10YR 3/4 Medii 10YR 4/4 Me Wi	Of Distribution nd Of Observation  97.37'/70"  None None	0-10 10-39 39-70 100.37 -97.17' ≥3.20 End Of S Limiting	Elevation Depth 17/38" Soil Obs	10YR 3/4 Me 10YR 4/4	n Of Distribution End Of Observation On  97.17'/70"  None None
Bottom Of Distribution Medium At: 34 Inches Or Elevation 100.37' At Soil Probe 1							

Signature:	
------------	--

RIV WHITE BEAR SOIL TESTING 2308 LILAC LANE JOB & Reiling - Square Lake - See legal description in ortached over 18ther) WHITE BEAR LAKE, MN. 55110
BOREHOLE DIAMETER 5" DATE <u>8-36-78</u> BORING LOG DEPTH FEET HOLE #1 HOLE #2 HOLE #3 HOLE #4 HOLE #5 HOLE #6 Black Topsoil H. brown -sandy clay Lt. brown plus gravel to 1/4"dia. clean med, sand with moderate -pea-gravel. Sidewall badly caving)

#### **DISCLAIMER**

## Brian L. Humpal, Inc. dba. Midwest Sewer Services, Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.