

520 Lafayette Road North St. Paul, MN 55155-4194

Compliance Inspection Form


Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days	
System Status	
System status on date (mm/dd/yyyy): 4/3/2017	
	pliant – Notice of Noncompliance de Requirements on page 3.)
Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) – Imminent threat Other Compliance Conditions (Compliance Component #3) – Imminent the Tank Integrity (Compliance Component #2) – Failing to protect groundward Other Compliance Conditions (Compliance Component #3) – Failing to protect groundward Soil Separation (Compliance Component #4) – Failing to protect groundward Operating permit/monitoring plan requirements (Compliance Component	hreat to public health and safety ater protect groundwater water
Property Information Parcel ID# or Sec/Twp/Ra	
	nge: for inspection: Sale
	s phone:
or	
•	entative phone:
	tory authority phone: 651-430-6000
Brief system description: Two 1,000 gallon septic tanks, one 1,000 gallon lift static	on, mound dispersal system
Comments or recommendations: Amount pumped was less than would be anticipated for total tank capacity. Checked deformities or issues with tank shape (composite).	empty tanks on 4/2/17 and did not note any
Certification	
I hereby certify that all the necessary information has been gathered to determine the determination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.	
Inspector name: Benjamin Zierke Certifica	ation number: 9594
Business name: Zierke Soil Testing Lice	ense number: 119
Inspector signature:	none number: 651-249-1346
Necessary or Locally Required Attachments	
Soil boring logs	er local ordinance

4. Soil Separation – Compliance component #4 of 5						
Date of installation: 6/1/2006 (mm/dd/yyyy)	Unknown	Verification method(s):				
Shoreland/Wellhead protection/Food beverage lodging?	☐ Yes ⊠ No	Soil observation does not expire. Previous soil observations by two independent parties are sufficient, unless site conditions have been altered or local requirements differ.				
Compliance criteria:						
For systems built prior to April 1, 1996, and	☐ Yes ☐ No	□ Conducted soil observation(s) (Attach boring logs)				
not located in Shoreland or Wellhead Protection Area or not serving a food,		☐ Two previous verifications (Attach boring logs)				
beverage or lodging establishment:		☐ Not applicable (Holding tank(s), no drainfield)				
Drainfield has at least a two-foot vertical		☐ Unable to verify (See Comments/Explanation)				
separation distance from periodically saturated soil or bedrock.	distance from periodically		Other (See Comments/Explanation)			
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	⊠ Yes □ No	Comments/Explanation:				
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
"Experimental", "Other", or "Performance"	☐ Yes ☐ No	Indicate depths or elevations				
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080.		Bottom of distribution media	102.8			
2350 or 7080.2400 (Advanced Inspector						
License required)		B. Periodically saturated soil/bedrock	99.9			
Drainfield meets the designed vertical separation distance from periodically		C. System separation	2.9			
saturated soil or bedrock.		D. Required compliance separation*	3.0 (2.55 with allowance)			
*May be reduced up to 15 percent if allowed by Local Ordinance. *May be reduced up to 15 percent if allowed by Local Ordinance. *May be reduced up to 15 percent if allowed by Local Ordinance. *May be reduced up to 15 percent if allowed by Local Ordinance. *May be reduced up to 15 percent if allowed by Local Ordinance.						
Is the system operated under an Operating Permit? Yes No If "yes", A below is required						
Is the system required to employ a Nitrogen BMP?						
BMP = Best Management Practice(s) specified in the system design						
If the answer to both questions is "no", this section does not need to be completed.						
Compliance criteria						
a. Operating Permit number:		☐ Yes ☐ No				
Have the Operating Permit requirements been met?						
b. Is the required nitrogen BMP in place		g? Yes No				
Any "no" answer indicates Noncompliance.						
Ungrade Requirements (Minn. Stat. & 115.55) An imminent threat to public health and safety (ITPHS) must be ungraded, replaced, or its use						

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

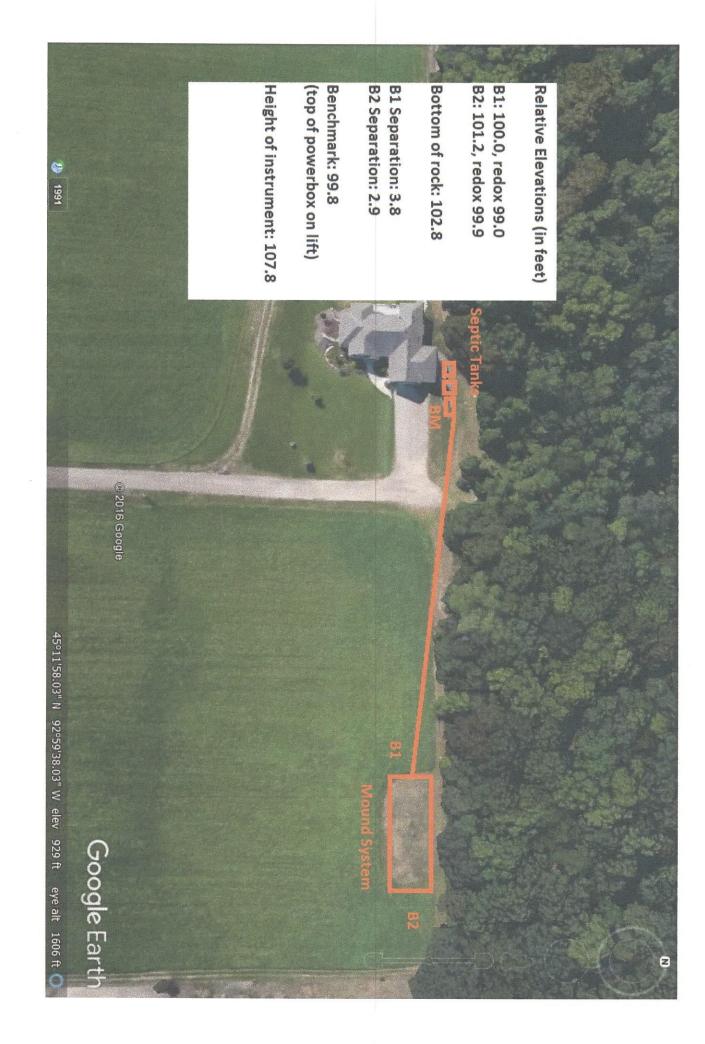

Logs of Soil Borings

Location of Project:

5526 170th St N Hugo, MN 55038

Borings Made by Ben Zierke

Date:

3/28/2017

Hand bucket auger used for borings; USDA - SCS Soil Classification used.

Depth, in Inches 0	Boring Number 1	Depth, in Inches 0	Boring Number 2
0-12"	10YR 3/3 loamy sand	0-10"	10YR 3/3 loamy sand
12-18"	10YR 4/3 loamy sand, redox starting at 12"	10-36"	10YR 4/3 loamy sand, redox below 16"
End of boring at Standing water tab Present at Standing water not p Mottled Soil: Observed at Mottled soil not pres Comments:	feet of depth Hours after boring 1 feet of depth 1 feet of depth 1	End of boring at Standing water tab Present at Standing water not p Mottled Soil: Observed at Mottled soil not pres Comments:	feet of depth Hours after boring 1.3 feet of depth
Depth, in Inches	Boring Number 3	Depth, in Inches	Boring Number 4
O	feet	O	teet
End of boring at Standing water tab Present at Standing water not p Mottled Soil: Observed at Mottled soil not pres	feet of depth Hours after boring feet of depth feet of depth	End of boring at Standing water tak Present at Standing water not p Mottled Soil: Observed at Mottled soil not pre	feet of depth Hours after boring feet of depth Feet of de
Comments:		Comments:	