#### **Inspect Minnesota & Midwest Soil Testing**

P.O. Box 383 Hugo, MN 55038

Brian Humpal

651-492-7550/Brian@midwestsoiltesting.com

MPCA Licensed Designer & Inspector

#### SUBSURFACE SEWAGE TREATMENT SYSTEM COMPLIANCE REPORT

**Date:** May 30, 2017 **Time:** 12:30 PM **Owner:** Judy Giesler

**Inspection Address:** 23263 Lofton Ct N, Scandia, MN 55073

#### **REPORT SUMMARY**

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, Judy Giesler, and have reviewed the original design/permit records on file at Washington County. This very old system (installed in 1981) consists of a precast septic tank, a pre-cast lift tank, and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(D) because of the lack of the required three foot separation between the bottom of the drainfield and seasonally saturated soils. Washington County issued sewage treatment permit #2750 for the installation of this septic system.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact Washington County Environmental Specialist, Mr. Chris LeClair (651-430-4052), to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal



## **Compliance Inspection Form**

## Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

<b>Instructions:</b> Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:			
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days				
System Status				
System status on date (mm/dd/yyyy):5/30/2017				
<del>_</del> ·	mpliant – Notice of Noncompliance grade Requirements on page 3)			
Reason(s) for noncompliance (check all applicable)  Impact on Public Health (Compliance Component #1) – Imminent threat to the Compliance Conditions (Compliance Component #3) – Imminent the Tank Integrity (Compliance Component #2) – Failing to protect groundward Other Compliance Conditions (Compliance Component #3) – Failing to protect groundward Soil Separation (Compliance Component #4) – Failing to protect groundward Operating permit/monitoring plan requirements (Compliance Component	reat to public health and safety ter otect groundwater vater			
Property Information Parcel ID# or Sec/Twp/Ran	ge: 05.032.20.43.0014			
Property address: 23263 Lofton Ct N, Scandia, MN 55073 Reason	for inspection: Property Transfer phone: 651-433-4437			
or				
• • • • • • • • • • • • • • • • • • • •	Representative phone:			
Brief system description: A pre-cast septic tank, a pre-cast lift tank, and a rock tren				
Comments or recommendations:				
Certification				
I hereby certify that all the necessary information has been gathered to determine the determination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.				
Inspector name: Brian Humpal Certifica	tion number: L5342			
	nse number: L2896			
Inspector signature: Brian Humpal Ph	one number: 651-492-7550			
Necessary or Locally Required Attachments				
	local ordinance			
☑ Other information (list): Report Summary, Property Information, Disclaimer, Li				

Property address: 23263 Lofton Ct N, Scandia, MN 55073

Inspector initials/Date: 5/30/2017

1.	ln	mpact on Public Health - Compliance component #1 of 5						
	Co	Compliance criteria:				Verification method(s):		
	gro	rstem discharge sewage to the bund surface.	☐ Yes □	⊠ No	⊠ Sea ⊠ Exc ⊠ Hor	Searched for surface outlet Searched for seeping in yard/backup in home		
		stem discharge sewage to drain tile surface waters.	☐ Yes 🏻	⊠ No		Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation) "Black soil" above soil dispersal system		
		rstem cause sewage backup into relling or establishment.	☐ Yes □	⊠ No		System requires "emergency" pumping Performed dye test		
		ny "yes" answer above indicates n Imminent Threat to Public Heal			☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)			
		omments/Explanation: one of the above found.						
	INC	one of the above lound.						
_	_							
<u>2.</u>	Tā	ank Integrity — Compliance con	nponent #2	2 of 5				
	Co	ompliance criteria:				rification method(s):		
		stem consists of a seepage pit, sspool, drywell, or leaching pit.	☐ Yes 🏻	⊠ No		Probed tank(s) bottom  Examined construction records		
		epage pits meeting 7080.2550 may be				Examined Construction records  Examined Tank Integrity Form (Attach)		
		mpliant if allowed in local ordinance.				Observed liquid level below operating depth		
		ewage tank(s) leak below their signed operating depth.	☐ Yes □	⊠ No		Examined empty (pumped) tanks(s)		
		es, which sewage tank(s) leaks:				Probed outside tank(s) for "black soil"		
		ny "yes" answer above indica /stem is Failing to Protect Gro		er.	<ul> <li>☐ Unable to verify (See Comments/Explanation)</li> <li>☐ Other methods not listed (See Comments/Explanation)</li> </ul>			
Comments/Explanation:								
	Lowered underwater camera into tanks - baffles and tank walls OK.							
	Lift pump and alarm were operational at the time of the inspection.							
2	Δ,	th an Canadian as Canditions						
3.	U	ther Compliance Conditions		<u> </u>				
	a.	Maintenance hole covers are damaged				·		
	b.	Other issues (electrical hazards, etc.) to in *System is an imminent threat to put	-		oact <sub>l</sub>	oublic health or safety. ☐ Yes* ☒ No ☐ Unknown		
		Explain:						
	c. System is non-protective of ground water for other conditions as determined by inspector ☐ Yes* ☒ No *System is failing to protect groundwater			ned by inspector ☐ Yes* ☒ No				
		Explain:						

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Property address: 23263 Lofton Ct N, Scandia, MN 55073

Inspector initials/Date: 5/30/2017

	Date of installation: 1981	Unkr	nown	V	erification method(s):	
	Shoreland/Wellhead protection/Food Beverage Lodging?	⊠ Yes		S	oil observation does not expire. P	
	Compliance criteria:			ш	bservations by two independent p nless site conditions have been al	
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes	□No		equirements differ.  Conducted soil observation(s) ( Two previous verifications (Atta  Not applicable (Holding tank(s), n	ch boring logs)
	Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.				Unable to verify (See Comments) Other (See Comments/Explanation	/Explanation)
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes	⊠ No	С	omments/Explanation:	
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*					
	"Experimental", "Other", or "Performance"	☐ Yes	□No	In	ndicate depths of elevations	_
	systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			_A.	Bottom of distribution media	See Attached Boring Log(s)
	Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.				Periodically saturated soil/bedrock  System separation	
	Any "no" analyse shave indicates t	ha ayat	om io		Required compliance separation*	
į	Any "no" answer above indicates to Failing to Protect Groundwater.  Operating Permit and Nitrogen B.			_ (	May be reduced up to 15 percent in Drdinance.  ponent #5 of 5 Not app	·
<u>.                                    </u>	Is the system operated under an Operating Per				If "yes", A below is required	ilicable
	Is the system required to employ a Nitrogen BM				If "yes", B below is required	
	BMP=Best Management Practice(s) specifi				ii yoo , b bolow lo loquilou	
	If the answer to both questions is "no",		-	•	need to be completed	
	·	ins sec	ion doe	3 1101 1	reed to be completed.	
	Operating Permit number:     Have the Operating Permit requirements by	neen met			☐ Yes ☐ No	
			,		Î.	

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3

#### FEE: \$\_25.00

#### WASHINGTON COUNTY, MINNESOTA

Sewage Treatment Permit No. 2750

Inspection of Installation Must Be Made By the Building Official Before Any Portion of System Is Covered Contact Planning Department, 439-3220 x-176, 24 HOUR NOTICE REQUIRED

Owner DON MORCH
Property Description Lot & Sandaren Add. New Scondia
Property Address 23263 LOFTON CONRT N).
Use of Building: Rep. Flow Rate: 2 R Recognition Rep. 45
Septic Tank 1200 Gal Liquid Capacity Lift Station (1)
Type of System: DrainField - Strallow Trancles
Absorption Trench — Square Feet 600 Lineal Feet 200 Width 360
Depth of Rock Below Lines 12 Inches, Above Lines 2 Inches
Depth of Trench From Existing Grade — Minimum
Recommended Number of Lines 2/
Minimum Spacing of Lines Ft. Center to Center
Special Conditions Suprem To Go in aven Testal And Shum on Artachul Sire Plan - Open CEX 515 Fing TAMS for Inspection, 16 using
CEXSISTING TAMES For Inspection, is using
PERMIT: Permission is hereby granted to the above named applicant to perform the work described in the application to the minimum specifications shown above and per attached site plan. This permit is granted upon express condition that the person to whom it is granted, and his agents, employees and workmen shall conform in all respects to ordinances of Washington County, Minnesota. This permit may be revoked at any time upon violation of any said ordinance, and permit shall be void if work is not commenced with six (6) months.  INSTALLER MUST HOLD CURRENT-SEPTIC INSTALLER LICENSE WITH WASHINGTON COUNTY.  Approved:  Date  Date
Comments
nstallation Approved Seess Curles Constitution Date 16-26-81

White-Copy-Applicant

Canary-Copy-File

Pink-Copy-Inspector

Goldenrod-Municipality


## Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: May 30, 2017	Time: 12:30 PM				
Property Address: 23263 Lofton Ct N, Scandia, MN	Zip: 55073				
Property Owner: Judy Gielser	Phone: 651-433-4437				
Tank(s) Tank(s)Material Soil Treatment System  Septic 1 Fiberglass Rock trench  Aerobic Plastic Gravelless trench  Lift Metal Chamber trench  Holding Concrete Seepage bed  Other: Block Mound  Other Are the tank maintenance covers accessible? Yes No *If to performed through the maintenance holes. Maintenance hole covers	Other  Alternative system Experimental system Cesspool system Other system on, proper maintenance must be				
the ground surface to facilitate access and proper maintenance of t					
	Γank size (gals.): 1200				
How long has seller owned the property? 1995 Number of res	sidents in home? 1-2				
Number of bedrooms? 2 Are all floors drained by gr					
Garbage disposal? No Whirlpool bath?	No				
More than one system (laundry, etc.)? No					
Does this property have any footing drain tiles connected to the septic system? No  Are any buildings on this property such as garages or out-buildings connected to this system? No					
Are there any additional systems on this property serving other buildings? No					
Location of septic system on lot? West Side					
	well a deep well? Yes				
Have you ever experienced any problems with the system such as:	tree roots, sewage back-ups,				
surfacing of sewage onto the ground, septic tank overflowing, etc., to the system? No If yes, explain:	; or have any repairs been made				
When was the system last pumped? 2015 Name of pum	per:				
<i>y</i> 1 1	on a monitoring plan? No				
Have you received notices from any government agency concernir					
Is your property located in a shoreland management area? Yes					
Do you have any additional information that should be given to the new owner? No					

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant: Judy Giesler's Signature On File Date: 05/30/2017

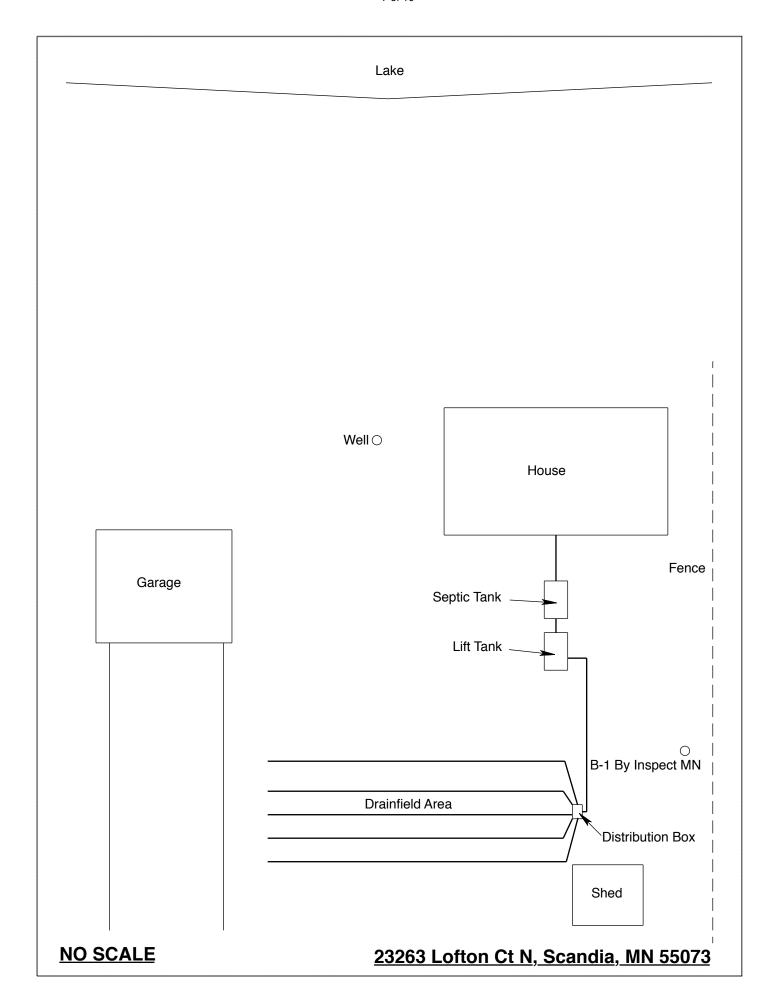

#### **Log Of Soil Borings**

Location of Project: 23263 Lofton Ct N, Scandia, MN 55073					
Borings Made By: Inspect Minnesota				Date:	5/30/17
Auger Used: Hand/Bucket			Classification System: USDA		
	Boring Number:	1		Boring Number:	
Surface Elevation Boring	of Same grou	ind surface as last ofield trench	Surface Elevation Boring	of	
Depth In Inches	Soils E	<u>ncountered</u>	Depth In Inches	Soils Er	ncountered
Depth In Soils Encountered					
38"	Depth To End Of B	oring Or Redox	I	Depth To End Of Bo	oring Or Redox
Same	Elevation Of Boring	g Relative To System		Elevation Of Boring	Relative To System
-27" Depth To Bottom Of Distribution Media		Depth To Bottom Of Distribution Media			
=11" Of Separation			Of Separation		
	End Of Boring At:	57"		End Of Boring At:	
	Redox Present At:	38"		Redox Present At:	
Standing	Water Present At:	48" At 15 Minutes		Water Present At:	

Bottom Of Distribution Medium At: 27 Inches

#### **DISCLAIMER**

## Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

## Subsurface Sewage Treatment Systems

Non-transferable

# Business License

## Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2017

Issued: 11/29/2016

## Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

### Designated Certified Individual(s):

Cert #

Name

**Certification Expires:** 

C5342

**Brian L Humpal** 

10/15/2017

Installer, Maintainer, Serv Prov, Adv Designer, Adv Inspector

C9852

Christopher R Uebe

3/4/2018

Designer, Inspector



St. Paul, Minnesota 55155-4194

Steven Giddings, Manager

Prevention and Solid Waste Management Section