### **Inspect Minnesota & Midwest Soil Testing**

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal

MPCA Licensed Advanced Inspector

#### SUBSURFACE SEWAGE TREATMENT SYSTEM COMPLIANCE REPORT

**Date:** June 7, 2017 **Time:** 10:15 AM **Owner:** Elizabeth & Steve Lockridge

**Inspection Address:** 13220 24th St N, West Lakeland Twp, MN 55082

#### REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This system consists of two pre-cast septic tanks, a plastic lift tank, and a chamber trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(D) because of the lack of the required three foot separation between the bottom of the drainfield and seasonally saturated soils. Washington County issued sewage treatment permit #0017-10-5 for the installation of this septic system.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact Washington County Environmental Specialist, Mr. Chris LeClair (651-430-4052), to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal
Brian Humpal



St. Paul, MN 55155-4194

# **Compliance Inspection Form**

#### **Existing Subsurface Sewage Treatment Systems** (SSTS)

Doc Type: Compliance and Enforcement

	sults based on Minnesota Pollution Control Agency (Norms – additional local requirements may also apply.	For local tracking purposes:		
Submit completed form to within 15 days	o Local Unit of Government (LUG) and system ov	vner		
System Status				
System status on da	ate (mm/dd/yyyy):6/7/2017			
(Valid for 3 years	•	oncompliant – Notice of Noncompliance ee Upgrade Requirements on page 3)		
☐ Impact on Publ☐ Other Complian☐ Tank Integrity (☐ Other Complian☐ Soil Separation☐	compliance (check all applicable) ic Health (Compliance Component #1) – Imminent to nce Conditions (Compliance Component #3) – Immin (Compliance Component #2) – Failing to protect gro nce Conditions (Compliance Component #3) – Failin in (Compliance Component #4) – Failing to protect gro nit/monitoring plan requirements (Compliance Component	nent threat to public health and safety undwater g to protect groundwater roundwater		
Property Information	Dorock ID# on Coo/Tv	VP/Department 20 020 20 24 0000		
		/p/Range: 20.029.20.31.0009		
· ·		Reason for inspection: Property Transfer  Owner's phone: 574-339-2537		
or	- C			
Owner's representative:	Re	Representative phone:		
Local regulatory authority:	Washington County Re	egulatory authority phone: 651-430-4052		
Brief system description:	Two pre-cast septic tanks, a plastic septic teank, a	nd a chamber trench drainfield.		
Comments or recommenda	tions:			
Certification				
determination of future syst	necessary information has been gathered to determinem performance has been nor can be made due to to m, inadequate maintenance, or future water usage.			
Inspector name: Brian H	umpal Co	ertification number: <u>L5342</u>		
Business name: Inspect	Minnesota, Midwest Soil Testing	License number: L2896		
Inspector signature:	Brian Humpal	Phone number: 651-492-7550		
Necessary or Locall	y Required Attachments			
Soil boring logs		ms per local ordinance		
	-	•		

1.	Impact on Public Health – Compliance component #1 of 5					
	Sy gro	estem discharge sewage to the bund surface.  Instem discharge sewage to drain tile surface waters.  Instem cause sewage backup into velling or establishment.  In y "yes" answer above indicates of Imminent Threat to Public Heal comments/Explanation:  In the property of the above found.		Verification method(s):  Searched for surface outlet  Searched for seeping in yard/backup in home  Excessive ponding in soil system/D-boxes  Homeowner testimony (See Comments/Explanation)  "Black soil" above soil dispersal system  System requires "emergency" pumping  Performed dye test  Unable to verify (See Comments/Explanation)  Other methods not listed (See Comments/Explanation)		
2.	Τā	ank Integrity — Compliance com	nponent #2 of 5			
3.	Sycense Second S	stem consists of a seepage pit, sspool, drywell, or leaching pit.  sepage pits meeting 7080.2550 may be impliant if allowed in local ordinance.  swage tank(s) leak below their signed operating depth.  syes, which sewage tank(s) leaks:  sy "yes" answer above indicates and its Failing to Protect Green is Failing to Protect Green is pump and alarm were operational at their compliance Conditions	baffles and tank walls the time of the inspection	on.		
	a.	Maintenance hole covers are damaged	d, cracked, unsecured, o	r appear to structurally unsound. ☐ Yes* ☒ No ☐ Unknown		
	b. c.	Other issues (electrical hazards, etc.) to in *System is an imminent threat to put Explain:  System is non-protective of ground was	ıblic health and safety	ely impact public health or safety.   Yes*   No  Unknown  State of the safety inspector  Yes*  No		
		*System is failing to protect ground Explain:				

Property address: 13220 24th St N, West Lakeland Twp, MN 55082

Inspector initials/Date: 6/7/2017

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Date of installation: 2011	Unknown	Verification method(s):		
Shoreland/Wellhead protection/Food Beverage Lodging?	☐ Yes       No	Soil observation does not expire. Previous soil observations by two independent parties are sufficier		
Compliance criteria:		unless site conditions have been alt		
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes ☐ No	requirements differ.  Conducted soil observation(s) (Attach boring logs) Two previous verifications (Attach boring logs) Not applicable (Holding tank(s), no drainfield) Unable to verify (See Comments/Explanation) Other (See Comments/Explanation)  Comments/Explanation:		
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.				
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes ⊠ No			
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*				
"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV	☐ Yes ☐ No	Indicate depths of elevations		
or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)  Drainfield meets the designed vertical separation distance from periodically		A. Bottom of distribution media	See Attached Boring Log(s)	
		B. Periodically saturated soil/bedrock     C. System separation		
saturated soil or bedrock.		D. Required compliance separation*		
Any "no" answer above indicates to Failing to Protect Groundwater.  Operating Permit and Nitrogen B		*May be reduced up to 15 percent if Ordinance.	·	
s the system operated under an Operating Per	mit?	⊠ No If "yes", A below is required		
s the system required to employ a Nitrogen BM	IP? ☐ Yes	⊠ No If "yes", B below is required		
BMP=Best Management Practice(s) specif	ied in the system des	sign		
the answer to both questions is "no",	this section does	not need to be completed.		
Compliance criteria				
Operating Permit number:     Have the Operating Permit requirements I	☐ Yes ☐ No			
<u> </u>	☐ Yes ☐ No			

Property address: 13220 24th St N, West Lakeland Twp, MN 55082

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3

Inspector initials/Date: 6/7/2017



#### Department of Public Health and Environment

14949 62nd Street North PO Box 6 Stillwater MN 55082-0006

Office: 651-430-6655 TTY: 651-430-6246 Fax: 651-430-6730

Review Fee:	\$280.00
Permit Fee:	\$290.00
Total Fee:	\$570.00 
Previous Payment	\$570.00
Balance Due	\$0.00

Community:

West Lakeland Township

**Permit Number:** 

0017-10-5

Owner:

Steve & Elizabeth Lockkiplie

2376 Stonecrest Path Prior Lake MN 55372-

Applicant:

**Rich Cooke Homes** 

#### PERMISSION IS HEREBY GRANTED

To execute the work specified in this permit on the following identified property upon express condition that said persons and their agents, and employees shall conform in all respects to the provisions of Ordinance #128, Washington County Development Code, Chapter Four, Individual Sewage Treatment System Regulations. This permit may be revoked at any time upon violation of any of the provisions of said ordinance.

Project Address:

13220 24th ST N

Geo Code:

20-029-20-31-0009

Designer:

Thomas F. Trooien

Type of System: Drainfi	hla			<u> </u>	Pressure Distribution
					N/A
Design Criteria	ì	Drainfield :	Sizing		
Percolation Rate:	40	Square Feet:	1200		
Depth To Restriction:	60	Lineal:	400	Feet	
Land Slope:	4.00%	Depth Of Rock Below:	12	Inches	
Flow Rate:	600	Maximum Trench Depth:	24	Inches	
Number of Bedrooms:	4	Number Of Trenches:	4		
☐ Gravelless		Length Of Trenches:	100	Feet	
☐ Chambered		Spacing Of Trenches:	7.5	Feet	
·	•	Tank Sizes			
Tank 1: 1000 Tar	ık 2: 1000	Tank 3: 0 L	ift Station:	0	

#### **Authorized Work/Special Conditions**

- 1. Effluent Filter with Alarm Required
- 2. Install individual sewage treatment system as per approved design in area tested and shown on the site plan.

Permit Issue Date: Permit Expiration Date: 10/6/2010

10/6/2011

Pete Ganzel

Senior Environmental Specialist

Course

#### **Inspect Minnesota & Midwest Soil Testing**


#### **Subsurface Sewage Treatment System Owner/Property Information**

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: June 7, 2017	Time: 10:15 AM						
Property Address: 13220 24th St N, West Lakeland Twp, MN	Zip: 55082						
Property Owner: Steve Lockridge	Phone: 574-339-2537						
Tank(s)       Tank(s)Material       Soil Treatment System         Septic 2       Fiberglass       Rock trench         Aerobic       Plastic       Gravelless trench         Lift       Metal       Chamber trench         Holding       Concrete       Seepage bed         Other:       Block       Mound         Other       At-grade	Other  Alternative system Experimental system Cesspool system Other system						
Are the tank maintenance covers accessible?   Yes  No *If no, proper maintenance must be performed through the maintenance holes. Maintenance hole covers should be made accessible to the ground surface to facilitate access and proper maintenance of the system.							
Year house built: 2011 Year septic installed: 2011							
	sidents in home?						
Number of bedrooms? 4 Are all floors drained by gr							
Garbage disposal? Whirlpool bath?							
More than one system (laundry, etc.)?							
Does this property have any footing drain tiles connected to the se	ptic system?						
Are any buildings on this property such as garages or out-buildings connected to this system?  Are there any additional systems on this property serving other buildings?							
Location of septic system on lot? Southeast Side							
Location of water well on lot? Is the well a deep well? Y							
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system?  If yes, explain:							
When was the system last pumped? 2013 Name of pum	per:						
How often pumped in previous years?							
Have you received notices from any government agency concerning this system?							
Is your property located in a shoreland management area? N							
Do you have any additional information that should be given to the new owner?							
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection							

Owner/Occupant: Date:

by Inspect Minnesota and Midwest Soil Testing.

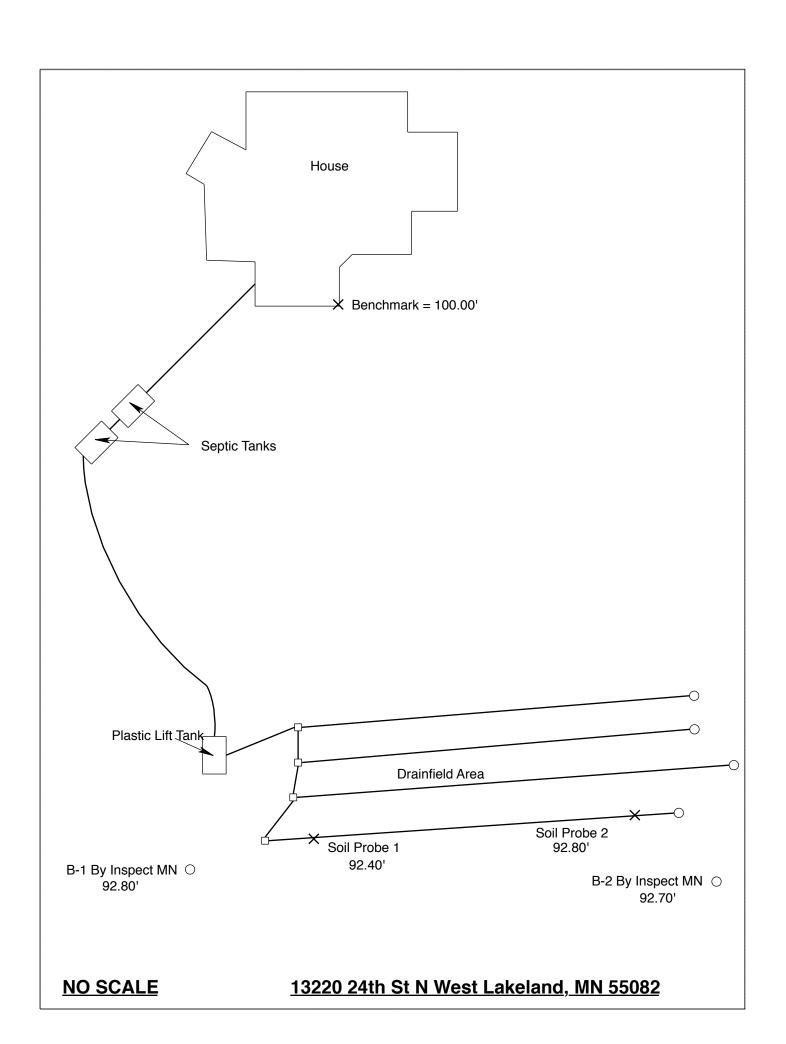

#### **Log Of Soil Borings**

Location of Project: 13220 24th St N, West Lakeland Twp, MN 55082					
Borings Made By: Inspect Minnesota				Date:	6/7/17
Auger Used: Hand/Bucket		Class	ification System:	USDA	
Boring Number: 1			Boring Number:	2	
Surface		92.80'	Surface	Surface	
Elevation of	f Benchmark = 100.00' bottom of		Elevation of		92.70'
Boring	siding at ea	st corner of house	Boring		
Depth In Inches	Soils Er	ncountered	Depth In Inches	Soils Encountered	
11-19 19-23 23-40 40-48 48-60	10YR 3/2 Medium Sand (Very Dry) 10YR 3/3 Medium Sand 10YR 3/3 Sandy Loam 10YR 4/3 Sandy Loam 10YR 4/4 Loam 10YR 4/4 Loam With 7.5YR 5/8, 5YR 5/8, & 10YR 7/2 Redox		0-17 17-29 29-45	Soils Encountered  17 10YR 3/4 Medium Sand 29 10YR 4/4 Loam	
90.07' Elevation To Bottom Of Distribution Media			90.63'	Elevation To Bottom	of Distribution Media
-88.80' Depth To Redox Or End Of Boring			-90.28'	Depth To Redox Or	End Of Boring
=1.27'/15" Of Separation			=0.35'/4"	Of Separation	
End Of Boring At: 60"				End Of Boring At:	45"
Redox Present At: 48"/88.80'				Redox Present At:	29"/90.28'
Standing Water Present At: None			Standing	Water Present At:	None

Bottom Of Distribution Medium At: 28" Or 90.07' At Soil Probe 1 Bottom Of Distribution Medium At: 26" Or 90.63' At Soil Probe 2

#### **DISCLAIMER**

# Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

# Subsurface Sewage Treatment Systems

Non-transferable

# Business License

# Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2017

Issued: 11/29/2016

# Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

## Designated Certified Individual(s):

Cert #

Name

**Certification Expires:** 

C5342

**Brian L Humpal** 

10/15/2017

Installer, Maintainer, Serv Prov, Adv Designer, Adv Inspector

C9852

Christopher R Uebe

3/4/2018

Designer, Inspector



St. Paul, Minnesota 55155-4194

Steven Giddings, Manager

Prevention and Solid Waste Management Section