1 of 10

## **Inspect Minnesota & Midwest Soil Testing**

P.O. Box 10853 White Bear Lake, MN 55110		Brian Humpal		
651-492-7550/Brian@Midwestsoiltesting.com		MPCA Licensed Advanced Inspector		
SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT				
Date: April 24, 2018Time: 11:00 AMOwner: Darrin Westemeier				
Inspection Address: 22959 Olinda Tr N, Scandia, MN 55073				

#### **REPORT SUMMARY**

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This older system (installed in 1993) consists of two pre-cast septic tanks, a pre-cast lift tank, and a mound.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system presently meets MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Brian Humpal Brian Humpal

Minnesota Pollution Control Agency 520 Lafayette Road North St. Paul, MN 55155-4194

## **Compliance Inspection Form**

#### **Existing Subsurface Sewage Treatment Systems** (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA)	
requirements and attached forms – additional local requirements may also apply.	

For local tracking purposes:

Submit completed form to Local Unit of Government (LUG) and system owner within 15 days

#### System Status

System status on date (mm/dd/yyyy): 4/24/2018

#### Compliant – Certificate of Compliance

(Valid for 3 years from report date, unless shorter time frame outlined in Local Ordinance.)

#### Noncompliant – Notice of Noncompliance

(See Upgrade Requirements on page 3)

#### Reason(s) for noncompliance (check all applicable)

- □ Impact on Public Health (Compliance Component #1) Imminent threat to public health and safety
- Other Compliance Conditions (Compliance Component #3) Imminent threat to public health and safety
- Tank Integrity (Compliance Component #2) Failing to protect groundwater
- Other Compliance Conditions (Compliance Component #3) Failing to protect groundwater
- Soil Separation (Compliance Component #4) Failing to protect groundwater
- Operating permit/monitoring plan requirements (Compliance Component #5) Noncompliant

#### **Property Information**

Parcel ID# or Sec/Twp/Range:

Property address:	22959 Olinda Tr N, Scandia, MN 55073	Reason for inspection: Property Transfer
Property owner:	Darrin Westemeier	Owner's phone: 651-238-7929
or		
Owner's represent	ative:	Representative phone:
Local regulatory authority: Washington County		Regulatory authority phone: 651-430-4052
Brief system desci	iption: _Two pre-cast septic tanks, a pre-cast lift ta	nk, and a mound.
Comments or reco	mmendations:	

Comments or recommendations:

#### Certification

I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage.

Inspector name:	Brian Humpal	Certification number:	L5342
Business name:	Inspect Minnesota, Midwest Soil Testing	License number:	L2896
Inspector signature	: Brian Humpal	Phone number:	651-492-7550

#### Necessary or Locally Required Attachments

🖾 Soil boring logs	🛛 System/As-built drawing	Forms per local ordinance
Other information (list):	Report Summary, Property Informa	tion, Disclaimer, License

2 of 10

#### 1. Impact on Public Health – Compliance component #1 of 5

Compliance criteria:	
System discharge sewage to the ground surface.	🗌 Yes 🖾 No
System discharge sewage to drain tile or surface waters.	🗌 Yes 🖾 No
System cause sewage backup into dwelling or establishment.	🗌 Yes 🖾 No
•	

Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.

Comments/Explanation:

None of the above found.

#### Verification method(s):

- Searched for surface outlet
- Searched for seeping in yard/backup in home
- Excessive ponding in soil system/D-boxes
- Homeowner testimony (See Comments/Explanation)
- "Black soil" above soil dispersal system
- System requires "emergency" pumping
- Performed dye test
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

#### 2. Tank Integrity – Compliance component #2 of 5

#### Compliance criteria:

System consists of a seepage pit, cesspool, drywell, or leaching pit.	🗌 Yes	🛛 No
Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.		
Sewage tank(s) leak below their designed operating depth.	🗌 Yes	🛛 No
If yes, which sewage tank(s) leaks:		

## Any "yes" answer above indicates the system is Failing to Protect Groundwater.

Comments/Explanation:

Lowered underwater camera into tanks - baffles and tank walls OK. Lift pump and alarm were operational at the time of the inspection.

#### Verification method(s):

- Probed tank(s) bottom
   Examined construction records
   Examined Tank Integrity Form (Attach)
- Observed liquid level below operating depth
- Examined empty (pumped) tanks(s)
- Probed outside tank(s) for "black soil"
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

#### 3. Other Compliance Conditions – Compliance component #3 of 5

- a. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. 🗌 Yes\* 🛛 No 🗌 Unknown
- b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. \*System is an imminent threat to public health and safety

Explain:

c. System is non-protective of ground water for other conditions as determined by inspector □ Yes\* ⊠ No \*System is failing to protect groundwater

Explain:

#### **4. Soil Separation** – Compliance component #4 of 5

Date of installation: 1993	🗌 Unkr	nown	Verification method(s):	
Shoreland/Wellhead protection/Food Beverage Lodging?	🛛 Yes	🗌 No	<ul> <li>Soil observation does not expire. Previous soil observations by two independent parties are sufficulted unless site conditions have been altered or local requirements differ.</li> <li>Conducted soil observation(s) (Attach boring logs)</li> <li>Two previous verifications (Attach boring logs)</li> <li>Not applicable (Holding tank(s), no drainfield)</li> </ul>	
Compliance criteria:				
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes	🗌 No		ch boring logs)
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.			<ul> <li>Unable to verify (See Comments/ Other (See Comments/Explanation)</li> </ul>	• •
Non-performance systems built April 1,	🛛 Yes	🗌 No	Comments/Explanation:	
1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:			Reviewed design and permit records.	S.
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*				
"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV	🗌 Yes	🗌 No		
or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)				See Attached Boring Log(s)
Drainfield meets the designed vertical			B. Periodically saturated soil/bedrock	
separation distance from periodically saturated soil or bedrock.			C. System separation	
			D. Required compliance separation*	
Any "no" answer above indicates the Failing to Protect Groundwater.	no" answer above indicates the system is g to Protect Groundwater.		*May be reduced up to 15 percent in Ordinance.	allowed by Local
Operating Permit and Nitrogen B	<b>MP*</b> – C	compliance	component #5 of 5 X Not app	licable
s the system operated under an Operating Peri	mit?	🗌 Yes 🛛	No If "yes", A below is required	
s the system required to employ a Nitrogen BM		☐ Yes [2	•	
BMP=Best Management Practice(s) specifi			-	
		,	-	

a.	Operating Permit number: Have the Operating Permit requirements been met?	Yes No
b.	Is the required nitrogen BMP in place and properly functioning?	🗌 Yes 🗌 No

#### Any "no" answer indicates Noncompliance.

**Upgrade Requirements** (*Minn. Stat.* § 115.55) *An imminent threat to public health and safety* (*ITPHS*) *must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.* 

# Inspect Minnesota & Midwest Soil Testing


#### Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: April 24, 2018	Time: 11:00 AM				
Property Address: 22959 Olinda Tr N, Scandia, N	IN Zip: 55073				
Property Owner: Darrin Westemeier	Phone: 651-238-7929				
Tank(s)Tank(s)MaterialSoil Tr $\square$ Septic 2 $\square$ Fiberglass $\square$ Roc $\square$ Aerobic $\square$ Plastic $\square$ Gra $\square$ Lift $\square$ Metal $\square$ Cha	eatment System       Other         k trench       Alternative system         velless trench       Experimental system         mber trench       Cesspool system         oage bed       Other system         ind				
Are the tank maintenance covers accessible? $\boxtimes$ Y performed through the maintenance holes. Maintee the ground surface to facilitate access and proper n	nance hole covers should be made accessible to naintenance of the system.				
Year house built: 1969 Year septic installed					
How long has seller owned the property?	Number of residents in home?				
•	rs drained by gravity? Y				
<u> </u>	Whirlpool bath?				
More than one system (laundry, etc.)?					
Does this property have any footing drain tiles con	nected to the septic system?				
Are any buildings on this property such as garages or out-buildings connected to this system?					
Are there any additional systems on this property s	erving other buildings?				
Location of septic system on lot? North Side					
Location of water well on lot? South Side	Is the well a deep well? Y				
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:					
When was the system last pumped? 2016 Name of pumper: Smilie's Sewer Service					
How often pumped in previous years?	Is system on a monitoring plan?				
Have you received notices from any government agency concerning this system?					
Is your property located in a shoreland management area? Y					
Do you have any additional information that should be given to the new owner?					

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant:

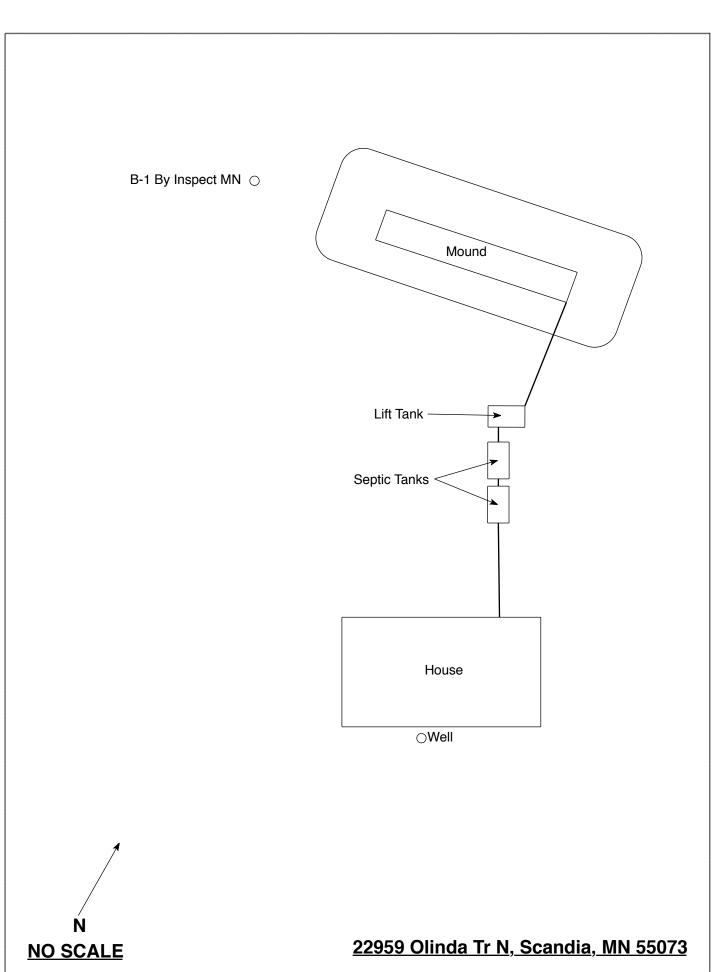

### Log Of Soil Borings

Locat	ion of Project	22959 Olinda Tr N, S	candia MN	55073	
		Inspect Minnesota	canala, Pin	Date:	4/23/18
		Hand/Bucket	Classif	fication System:	USDA
Bc	pring Number:			Boring Number:	
Surface		-	Surface		
Elevation of	40" below	top of mound on	Elevation of	of	
Boring	orig	inal contour	Boring		
Depth In			Depth In		
Inches	Solis E	ncountered	Inches	Solis En	<u>icountered</u>
0-5 5-13 13-19 19-24	10YR 4 7.5YR 4 7.5YR 4/4	/3 Silt Loam /3 Silt Loam 4/4 Silt Loam 4 Silt Loam With 4/4 Redox			
19" De	pth To End Of B	oring Or Redox	0	Depth To End Of Bo	oring Or Redox
+40" Ele	evation Of Borin	g Below Top Of Mound	elow Top Of Mound Elevation Of Boring Relative To System		Relative To System
					f Distribution Media
=31" Of	Separation			Of Separation	
Fn	d Of Boring At:	24"		End Of Boring At:	
	dox Present At:	19"		Redox Present At:	
	ater Present At:	20" At 15 Minutes		Water Present At:	

Bottom Of Distribution Medium At: 28 Inches

8 of 10



### EARTH SCIENCE TESTING<sup>TM</sup> soils information company:

## SOIL BORINGS

BORING NO.1 0" - 7" = DRK. BRN. FINE SANDY LOAM. 7" - 24" = BRN. FINE SANDY LOAM. 24" - 41" = RED BRN. FINE SANDY CLAY LOAM. 41" - 49" = RED BRN. FINE CLAY TILL, STIFF, IRON STAINS & MOTTLED. 49" - 8' - 0" = LT. REDDISH BRN. FINE LOAMY SAND.

#### BORING NO.2

0'' - 4'' = DRK. BRN. FINE SANDY LOAM. 4'' - 11'' = BRN. FINE SANDY LOAM. 11'' - 6' - 0'' = RED BRN. FINE SANDY CLAY LOAM.6' - 0'' - 8' - 0'' = LT. BRN. FINE SILTY CLAY LOAM, IRON STAINS & MOTTLED.

#### BORING NO.3

0" - 6" = DRK. BRN. FINE SANDY LOAM. 6" - 33" = BRN. FINE SANDY CLAY LOAM. 33" - 62" = RED BRN. FINE SANDY CLAY LOAM. 62" - 8' - 0" = LT. BRN. FINE SILTY CLAY LOAM, IRON STAINS & MOTTLED.

BORING NO. 4

0" - 4" = DRK. BRN. FINE SANDY LOAM. 4" - 36" = LT. BRN. FINE SANDY CLAY LOAM. 36" - 66" = RED BRN. CLAY TILL VERY STIFF, MOTTLED.

<u>BORING NO. 5</u> 0" - 5" = DRK. BRN. FINE SANDY LOAM.

## **DISCLAIMER**

#### Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing

#### Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

10 of 10

# Subsurface Sewage Treatment Systems Non-transferable Business License

# Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2018

Issued: 10/10/2017

# Specialty Area(s):

Installer Maintainer Service Provider Advanced Designer Advanced Inspector

# **Designated Certified Individual(s):**

Cert #	Name	<b>Certification Expires:</b>
C9633	Anthony P Scully	7/28/2018
	Installer, Designer (Conditional	)
C5342	Brian L Humpal	10/15/2020
	Installer, Maintainer, Serv Prov	, Adv Designer, Adv Inspector
C9852	Christopher R Uebe	3/4/2018
	Designer, Inspector	

## MINNESOTA POLLUTION CONTROL AGENCY

520 Lafayette Road North St. Paul, Minnesota 55155-4194

Charles K Thompson, Supervisor Certification & Training Unit