Inspect Minnesota & Midwest Soil Testing					
P.O. Box 383 Hugo, N	IN 55038	Brian Humpal			
651-492-7550/Brian@midwestsoiltesting.com		MPCA Licensed Designer & Inspector			
SUBSURFACE SEWAGE TREATMENT SYSTEM COMPLIANCE REPORT					
Date: April 25, 2016	Time: 1:30 PM	Owner: Arlene Scharpen			
Inspection Address: 3580 Oakgreen Ave N, Baytown, MN 55082					
REPORT SUMMARY					

I have performed an "MPCA Compliance Inspection" on this septic system and have reviewed the history of the system with the Owner, Arlene Scharpen. I contacted Washington County and was advised that there are no records for this system. This very old system (installed in 1971) consists of a cesspool and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(E) because of the cesspool and the lack of the required two foot separation between the bottom of the drainfield and seasonally saturated soils. This system is not an imminent threat to public health or safety per MPCA rule 7080.1500 Subp. 4(A).

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact Washington County Environmental Specialist, Mr. Chris LeClair (651-430-4052), to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal

Brian Humpal

Minnesota Pollution Control Agency 520 Lafayette Road North St. Paul, MN 55155-4194	Ce Inspection Form ce Sewage Treatment Systems (SSTS) Doc Type: Compliance and Enforcement		
Instructions: Inspection results based on Minnesot requirements and attached forms – additional local results and attached forms – additional local results are additional local results.		For local tracking purposes:	
Submit completed form to Local Unit of Govern within 15 days	ment (LUG) and system owner		
System Status			
System status on date (mm/dd/yyyy):/2	25/2016		
Compliant – Certificate of Comp (Valid for 3 years from report date, unless frame outlined in Local Ordinance.)		npliant – Notice of Noncompliance rade Requirements on page 3)	
Reason(s) for noncompliance (check a	all applicable)		
Impact on Public Health (Compliance C	Component #1) – Imminent threat to	o public health and safety	
Other Compliance Conditions (Compliance Conditions)	ance Component #3) – Imminent thr	eat to public health and safety	
Tank Integrity (Compliance Componen	t #2) – Failing to protect groundwat	er	

Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwater

Soil Separation (Compliance Component #4) – Failing to protect groundwater

Operating permit/monitoring plan requirements (Compliance Component #5) - Noncompliant

Property Information

Parcel ID# or Sec/Twp/Range:

Property address:	3580 Oakgreen Ave N, Stillwater, MN 55082	Reason for inspection: Property Sale		
Property owner:	Arlene Scharpen	Owner's phone: 651-439-8318		
or				
Owner's represent	ative:	Representative phone:		
Local regulatory a	uthority: Washington County	Regulatory authority phone: _ 651-430-4052		
Brief system descr	iption: Cesspool and rock trench drainfield.			
	mens and a file max			

Comments or recommendations:

Certification

I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage.

Inspector name:	Brian Humpal	Certification number:	L5342
Business name:	Inspect Minnesota, Midwest Soil Testing	License number:	L2896
Inspector signatur	: Brian Humpal	Phone number:	651-492-7550

Necessary or Locally Required Attachments

 Soil boring logs
 System/As-built drawing
 Forms per local ordinance

 Other information (list):
 Report Summary, Property Information, Disclaimer, License

1. Impact on Public Health – Compliance component #1 of 5

Compliance criteria: System discharge sewage to the ground surface. System discharge sewage to drain tile or surface waters. System cause sewage backup into dwelling or establishment.

Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.

Comments/Explanation:

None of the above found.

Verification method(s):

- Searched for surface outlet
- Searched for seeping in yard/backup in home
- Excessive ponding in soil system/D-boxes
- Homeowner testimony (See Comments/Explanation)
- "Black soil" above soil dispersal system
- System requires "emergency" pumping
- Performed dye test
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

2. Tank Integrity – Compliance component #2 of 5

Compliance criteria:

System consists of a seepage pit, cesspool, drywell, or leaching pit.	🖾 Yes 🗌 No
Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.	
Sewage tank(s) leak below their designed operating depth.	🗌 Yes 🛛 No
If yes, which sewage tank(s) leaks:	All Tanks
• " " • • • •	

Any "yes" answer above indicates the system is Failing to Protect Groundwater.

Comments/Explanation:

Lowered underwater camera into tank - tank of block construction.

Verification method(s):

Probed tank(s) bottom
 Examined construction records
 Examined Tank Integrity Form (*Attach*)
 Observed liquid level below operating depth
 Examined empty (pumped) tanks(s)
 Probed outside tank(s) for "black soil"
 Unable to verify (See Comments/Explanation)
 Other methods not listed (See Comments/Explanation)

3. Other Compliance Conditions – Compliance component #3 of 5

- a. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. 🗌 Yes* 🛛 No 🗌 Unknown
- b. Other issues (*electrical hazards, etc.*) to immediately and adversely impact public health or safety. \Box Yes* \boxtimes No \Box Unknown *System is an imminent threat to public health and safety

Explain:

c. System is non-protective of ground water for other conditions as determined by inspector □ Yes* ⊠ No *System is failing to protect groundwater

Explain:

Inspector initials/Date: 4/25/2016

4. Soil Separation – Compliance component #4 of 5

Date of installation: 1971	Unknown	Verification method(s):		
Shoreland/Wellhead protection/Food Beverage Lodging?	🗌 Yes 🖾 No	Soil observation does not expire. Previous soil observations by two independent parties are sufficie		
Compliance criteria:		unless site conditions have been a		
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	🗌 Yes 🖾 No	 requirements differ. Conducted soil observation(s) (Attach boring logs) Two previous verifications (Attach boring logs) Not applicable (Holding tank(s), no drainfield) 		
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.		 Unable to verify (See Comments Other (See Comments/Explanatio 		
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes ☐ No	Comments/Explanation:		
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*				
"Experimental", "Other", or "Performance"	🗌 Yes 🗌 No	Indicate depths of elevations		
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)		A. Bottom of distribution media	See Attached Boring Log(s)	
Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.		B. Periodically saturated soil/bedrockC. System separation		
		D. Required compliance separation*		
Any "no" answer above indicates t Failing to Protect Groundwater.	he system is	*May be reduced up to 15 percent Ordinance.	if allowed by Loca	
Operating Permit and Nitrogen B	MP* – Complian	ce component #5 of 5 🛛 🛛 Not app	blicable	
Is the system operated under an Operating Per	mit? 🗌 Yes	⊠ No If "yes", A below is required		
Is the system required to employ a Nitrogen BM	IP? 🗌 Yes	⊠ No If "yes", B below is required		
BMP=Best Management Practice(s) specif	ied in the system de	esign		
If the answer to both questions is "no",	this section doe	es not need to be completed.		
Compliance criteria				
a. Operating Permit number:				

Any "no" answer indicates Noncompliance.

Have the Operating Permit requirements been met?

b. Is the required nitrogen BMP in place and properly functioning?

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

□ Yes □ No

☐ Yes ☐ No

<u>Inspect Minnesota & Midwest Soil Testing</u>

Subsurface Sewage Treatment System Owner/Property Information


This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: April 25, 2016	Time: 1:30 PM				
Property Address: 3580 Oakgreen Ave N, Stillwater, MN	Zip: 55082				
Property Owner: Arlene Scharpen	Phone: 651-439-8318				
Tank(s) Tank(s)Material Soil Treatment System Septic Fiberglass Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding Concrete Seepage bed Other: Block Mound Other At-grade	Other Alternative system Experimental system Cesspool system <u>1</u> Other system				
Are the tank maintenance covers accessible? \Box Yes \boxtimes No *If reperformed through the maintenance holes. Maintenance hole cover the ground surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access and proper maintenance of the second surface to facilitate access a	ers should be made accessible to				
Year house built: 1971 Year septic installed: 1971	Fank size (gals.):				
How long has seller owned the property? 1980 Number of re-	sidents in home? 1-4				
Number of bedrooms? 4 Are all floors drained by g	ravity? Y				
Garbage disposal? N Whirlpool bath?	N				
More than one system (laundry, etc.)? N					
Does this property have any footing drain tiles connected to the se Are any buildings on this property such as garages or out-building					
Are there any additional systems on this property serving other bu	ildings? N				
Location of septic system on lot? West Side					
	well a deep well? Y				
Have you ever experienced any problems with the system such as: surfacing of sewage onto the ground, septic tank overflowing, etc. to the system? N If yes, explain:					
When was the system last pumped? 2015 Name of pum	per: Pinky's Sewer Service				
How often pumped in previous years? Every 2 Is system on a monitoring plan? N					
Have you received notices from any government agency concerning					
Is your property located in a shoreland management area? N					
Do you have any additional information that should be given to the	e new owner? N				

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant: Arlene Scharpen's Signature On File

Date: 4/25/2016

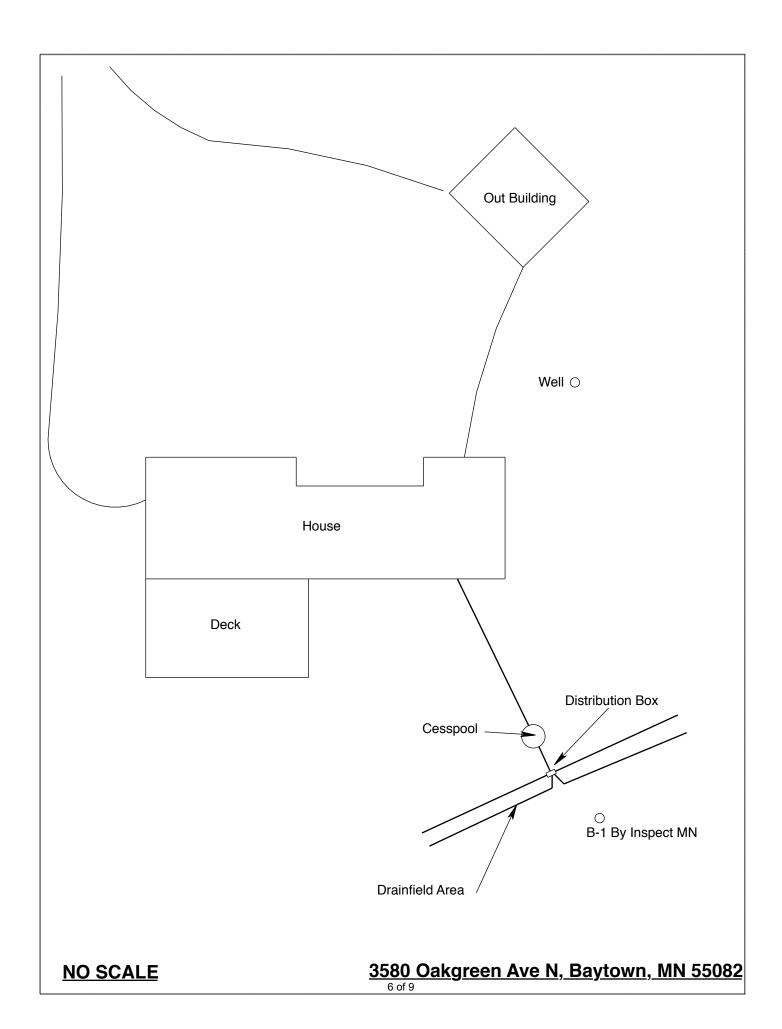

Log Of Soil Borings

Location of Project: 3580 Oakgreen Ave N, Stillwater, MN 55082						
Borings Made By: Inspect Minnesota			Date: 4/29/16			
		Hand/Bucket	Classi	fication System:	USDA	
Bc	pring Number:			Boring Number:		
Surface Elevation of Boring	Same grou	und surface as last nfield trench	Surface Elevation Boring			
Depth In Inches	<u>Soils E</u>	ncountered	Depth In Inches	<u>Soils Er</u>	countered	
0-10 10-14 14-18 18-23 23-62 62-70	10YR 3 10YR 4/3 7.5YR 5/8 & F 10YR 4 10YR 5 10YR 5/4 7.5YR 3/4 Lar 10YR 6/2 &	/2 Silt Loam /2 Silt Loam Silt Loam With ew 10YR 6/2 Redox /3 Silt Loam /4 Silt Loam Silt Loam With nellae Banding And 7.5YR 7/8 Redox				
62" De	pth To End Of B	oring Or Redox	Depth To End Of Boring Or Redox			
Same Ele	evation Of Borin	g Relative To System	E	Elevation Of Boring	ation Of Boring Relative To System	
	pth To Bottom (Separation	Of Distribution Media		Depth To Bottom O Of Separation	f Distribution Media	
En	d Of Boring At:	70"		End Of Boring At:		
	dox Present At:	62"		Redox Present At:		
Standing Water Present At: None			Standing	Water Present At:		

Bottom Of Distribution Medium At: 50 Inches

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing

Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems



Non-transferable

License # L2896

Adv Inspector License Expires: Adv Designer License Expires: Maintainer License Expires: Installer License Expires: Date of Issuance:

Oct 28, 2015 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016

Inspect Minnesota, Midwest Soil Testing

Certificatio Expires	10/15/2017	10/15/2017	10/15/2017	10/15/2017	10/15/2017	03/04/2018	03/04/2018
U A	Ξ	Ξ	Ξ	Ξ	=	Ö	Ö

A

Minnesota Pollution Control Agency

520 Lafayette Road North St. Paul, Minnesota 55155-4194



Steven Giddings Manager Environmental Business Assistance Section