Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear Lake, MN 55110 Brian Humpal 651-492-7550/Brian@Midwestsoiltesting.com MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM COMPLIANCE REPORT

Inspection Address: 4401 Pateley Bridge Ave S, Afton, MN 55001

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system. I have contacted the City of Afton and Washington County and was advised that there are no records for this system. This very old system (installed in approximately 1989) consists of a pre-cast septic tank and a rock trench drainfield. It should be noted that the average life expectancy of a septic system is approximately 30 years.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(E) because of the lack of the required two foot separation between the bottom of the drainfield and bedrock.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact the Washington County Department of Public Health & Environment (651-430-6655) to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

	Doc Type: Compliance and Enforcement		
Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:		
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days			
System Status			
System status on date (mm/dd/yyyy):11/27/2018			
	npliant – Notice of Noncompliance rade Requirements on page 3)		
Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) – Imminent threat to Other Compliance Conditions (Compliance Component #3) – Imminent threat the Tank Integrity (Compliance Component #2) – Failing to protect groundward Other Compliance Conditions (Compliance Component #3) – Failing to protect groundward Soil Separation (Compliance Component #4) – Failing to protect groundward Operating permit/monitoring plan requirements (Compliance Component #4)	eat to public health and safety er otect groundwater ater		
Property Information Parcel ID# or Sec/Twp/Rang	ge:		
Property address: 4401 Pateley Bridge Ave S, Afton, MN 55001 Reason for	or inspection: Property Transfer		
Property owner: Louis & Debra Gombkoto Owner's	phone: 612-850-1253		
or			
· · · · · · · · · · · · · · · · · · ·	itative phone:		
· · · · · · · · · · · · · · · · · · ·	Regulatory authority phone: 651-430-6655		
Brief system description: A pre-cast septic tank and a rock trench drainfield. Comments or recommendations:			
Certification			
I hereby certify that all the necessary information has been gathered to determine the of determination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.	•		
Inspector name: Brian Humpal/Christopher Uebe Certificat	on number: <u>C5342/C9852</u>		
	se number: L2896		
Inspector signature: Brian Humpal Man Pho	ne number: 651-492-7550		
Necessary or Locally Required Attachments			
· · · · · _ <u>-</u>	local ordinance		
☑ Soil boring logs☑ System/As-built drawing☑ Forms per☑ Other information (list):Report Summary, Property Information, Disclaimer, Lic	local ordinance		
Es other information (list). Treport outlinary, I toperty information, Disclaimer, Ele	CHOC		

651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats www.pca.state.mn.us • wq-wwists4-31 • 1/24/12 Page 1 of 3 Property address: 4401 Pateley Bridge Ave S, Afton, MN 55001

Inspector initials/Date: __11/27/2018

1.	lm	mpact on Public Health – Compliance component #1 of 5						
2.	Sygre Sygre Sydw All All Co	estem discharge sewage to the bund surface. Its tem discharge sewage to drain tile surface waters. Its tem cause sewage backup into welling or establishment. In y "yes" answer above indicates of Imminent Threat to Public Heal of Imminent Thr	ith and S	No No stem is Safety.		Searched for surface outly Searched for surface outly Searched for seeping in you Excessive ponding in soily Homeowner testimony (Song Black soil) above soil disconstruction System requires "emerged Performed dye test Unable to verify (See Compother methods not listed)	yard/backup in I system/D-box ee Comments/E spersal system ency" pumping	Kes Explanation) I tion)
	C.	ampliance eritoria:			V	rification mathad(a)		
		ompliance criteria:	☐ Yes	— No	-	erification method(s): Probed tank(s) bottom		
		sspool, drywell, or leaching pit.		⊠ NO		Examined construction re	ecords	
		epage pits meeting 7080.2550 may be mpliant if allowed in local ordinance.				Examined Tank Integrity		
		ewage tank(s) leak below their	☐ Yes	⊠ No	· _	Observed liquid level beloe Examined empty (pumpe		lepth
	de	signed operating depth.			· 🗆	Probed outside tank(s) fo		
		/es, which sewage tank(s) leaks:			- <u> </u>	Unable to verify (See Com		tion)
	Any "yes" answer above indicates the system is Failing to Protect Groundwater.				☐ Other methods not listed (See Comments/Explanation)			
3.	Lo	omments/Explanation: wered underwater camera into tank - l				3 of 5		
	a.	Maintenance hole covers are damage	d, cracked	, unsecure	ed, or appear	to structurally unsound.	Yes* ⊠ No	Unknown
	b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☒ No ☐ Unknow *System is an imminent threat to public health and safety					Unknown		
		Explain:						
	C.	c. System is non-protective of ground water for other conditions as determined by inspector ☐ Yes* ☒ No *System is failing to protect groundwater						
		Explain:						

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Property address: 4401 Pateley Bridge Ave S, Afton, MN 55001

Inspector initials/Date: 11/27/2018

	Date of installation: 1989?	☐ Unkr		Veri	ification method(s):		
	Shoreland/Wellhead protection/Food Beverage Lodging?	☐ Yes	⊠ No		observation does not expire ervations by two independer		
	Compliance criteria:	T		unle	ss site conditions have been		
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes	⊠ No		equirements differ. Conducted soil observation(s) (Attach boring Two previous verifications (Attach boring log Not applicable (Holding tank(s), no drainfield)		
	Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.			_	Unable to verify (See Comme Other (See Comments/Explana		
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes	□ No	Com	nments/Explanation:		
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
	"Experimental", "Other", or "Performance"	☐ Yes	□No	Indi	cate depths of elevatio	ns	
	systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			_A. B	ottom of distribution media	See Attached Boring Log(s)	
	Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.				eriodically saturated soil/bedro	ck	
				D. R	Required compliance separation	1*	
	Any "no" answer above indicates the system is Failing to Protect Groundwater.			-	y be reduced up to 15 perce linance.	ent if allowed by Local	
5.	Operating Permit and Nitrogen B	MP* – C	Compliance	compo	nent #5 of 5 🛮 🖂 Not a	applicable	
	Is the system operated under an Operating Per	mit?	☐ Yes 🏻	☑ No	lf "yes", A below is requir	red	
	Is the system required to employ a Nitrogen BM	IP?	☐ Yes 🏻	☑ No □	lf "yes", B below is requir	ed	
	BMP=Best Management Practice(s) specific	ied in the	system desi	gn			
	If the answer to both questions is "no",	this sec	tion does	not nee	ed to be completed.		
	Compliance criteria						
	Operating Permit number: Have the Operating Permit requirements to	peen met	?		☐ Yes ☐ No		
	b. Is the required nitrogen BMP in place and	properly	functionina?	ĪF	☐ Yes ☐ No		

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • wq-wwists4-31 • 1/24/12 Page 3 of 3


Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: November 27, 2018	Time: 11:15 AM			
Property Address: 4401 Pateley Bridge Ave S, Afton, MN	Zip: 55001			
Property Owner: Louis & Debra Gombkoto	Phone: 612-850-1253			
Tank(s) Tank(s)Material Soil Treatment System Septic 2 Fiberglass Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding Sconcrete Seepage bed Other: Block Mound Other Mound Are the tank maintenance covers accessible? Yes No *If performed through the maintenance holes. Maintenance hole covers	ers should be made accessible to			
the ground surface to facilitate access and proper maintenance of t	the system.			
Year house built: 1989 Year septic installed: 1989?				
	sidents in home?			
Number of bedrooms? 4 Are all floors drained by g				
Garbage disposal? N Whirlpool bath?				
More than one system (laundry, etc.)? Does this property have any footing drain tiles connected to the se	ptic system?			
	-			
Are any buildings on this property such as garages or out-buildings connected to this system?				
Are there any additional systems on this property serving other bu	ildings? Unknown			
Location of septic system on lot? East Side				
	e well a deep well? Y			
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:				
When was the system last pumped? 2014 Name of pum	per:			
How often pumped in previous years?				
Have you received notices from any government agency concerning this system?				
Is your property located in a shoreland management area? N				
Do you have any additional information that should be given to the new owner?				
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection				

Owner/Occupant: Date:

by Inspect Minnesota and Midwest Soil Testing.

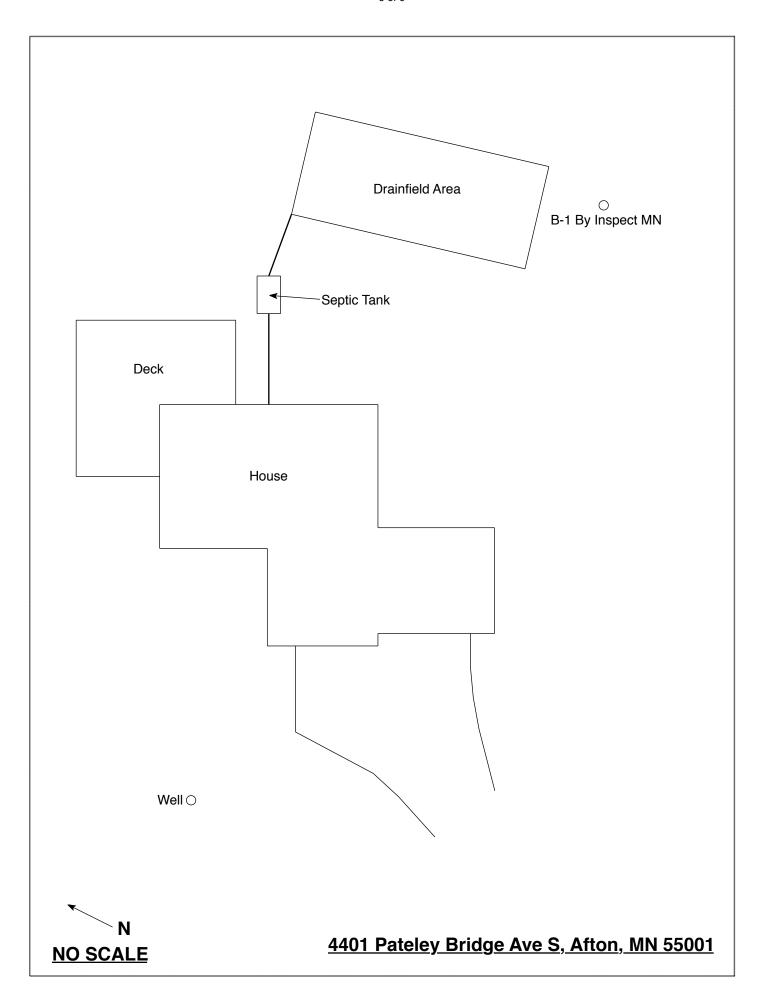

Log Of Soil Borings

Location of Project: 4401 Pateley Bridge Ave S, Afton, MN 55001					
Borings Made By: Inspect Minnesota			Date: 11/27/1		11/27/18
Auger Used: Hand/Bucket		Classification System: US		USDA	
	Boring Number:	1		Boring Number:	
Surface Elevation Boring	evation of Same ground surface as last drainfield trench		Surface Elevation Boring		
Depth In Inches	Soils E	ncountered	Depth In Inches	Soils Er	ncountered
0-13 13-20 20-28	10YR 3/4 S 10YR 3/4 S ≥50% Bed	/2 Silt Loam '4 Clay Loam andy Loam With rock Fragments at 28" Bedrock			
20"	Depth To End Of B	oring Or Bedrock		Depth To End Of Bo	oring Or Redox
Same	Elevation Of Boring	g Relative To System	Elevation Of Boring Relative To System		Relative To System
-31" =0"	Depth To Bottom Of Distribution Media				of Distribution Media
<u> </u>	=0" Of Separation			Of Separation	
End Of Boring At: 28"				End Of Boring At:	
Bedrock Present At: 20"			Redox Present At:		
Standing Water Present At: None			Water Present At:		

Bottom Of Distribution Medium At: 31 Inches	

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems Non-transferable Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2018

Issued: 10/10/2017

es:

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expire
C9633	Anthony P Scully	7/28/2018
	Installer, Designer (Conditional)	
C5342	Brian L Humpal	10/15/2020
	Installer, Maintainer, Serv Prov,	Adv Designer, Adv Inspector
C9852	Christopher R Uebe	3/4/2018
	Designer, Inspector	



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Charles & Thompson

Charles K Thompson, Supervisor Certification & Training Unit