### **Inspect Minnesota & Midwest Soil Testing**

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal

MPCA Licensed Advanced Inspector

#### SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

**Date:** March 7/2019 **Time:** 10:00 AM **Owner:** James Berg

Inspection Address: 13120 Lynch Rd, May Twp, MN 55038

#### REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system, have reviewed the history of the system with the owner, James Berg, and have reviewed the original design/permit records on file at Washington County. This system consists of a pre-cast septic tank and a rock trench drainfield. It should be noted that the average life expectancy of a septic system is approximately 30 years.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(E) because of the lack of the required two foot separation between the bottom of the drainfield and seasonally saturated soils.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact the Washington County Department of Public Health & Environment (651-430-6655) to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Christopher Uebe

Brian Humpal

Brian Humpal



# **Compliance Inspection Form**

# Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

<b>Instructions:</b> Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:				
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days					
System Status					
System status on date (mm/dd/yyyy): _3/7/2019					
·	npliant – Notice of Noncompliance grade Requirements on page 3)				
Reason(s) for noncompliance (check all applicable)  Impact on Public Health (Compliance Component #1) – Imminent threat to Other Compliance Conditions (Compliance Component #3) – Imminent threat the Tank Integrity (Compliance Component #2) – Failing to protect groundward Other Compliance Conditions (Compliance Component #3) – Failing to protect groundward Soil Separation (Compliance Component #4) – Failing to protect groundward Operating permit/monitoring plan requirements (Compliance Component #4)	reat to public health and safety ter otect groundwater rater				
Property Information Parcel ID# or Sec/Twp/Rang	ge:				
	or inspection: Property Transfer				
Property owner: James Berg Owner's	phone:				
Owner's representative: Represer	ntative phone:				
	ry authority phone: 651-430-6655				
Brief system description: A pre-cast septic tank and a rock trench drainfield.					
Comments or recommendations:					
Certification					
I hereby certify that all the necessary information has been gathered to determine the determination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.					
Inspector name: Brian Humpal/Christopher Uebe Certificat	ion number: <u>C5342/C9852</u>				
	nse number: _L2896				
Inspector signature: Brian Humpak Mar Mr. Pho	one number: 651-492-7550				
Necessary or Locally Required Attachments					
	local ordinance				
☑ Other information (list): Report Summary, Property Information, Disclaimer, Lic	cense				

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 1 of 3

Property address: <u>13120 Lynch Rd, May Twp, MN 55038</u>

Inspector initials/Date: 3/7/2019 8/4

1.	In	Impact on Public Health — Compliance component #1 of 5					
	Compliance criteria:				Verification method(s):		
		stem discharge sewage to the bund surface.	☐ Yes	⊠ No	$\boxtimes$	Searched for surface outlet Searched for seeping in yard/backup in home	
		stem discharge sewage to drain tile surface waters.	☐ Yes	⊠ No		Excessive ponding in soil system/D-boxes  Homeowner testimony (See Comments/Explanation)  "Black soil" above soil dispersal system	
		System cause sewage backup into dwelling or establishment.		☐ Yes   No		System requires "emergency" pumping Performed dye test	
		ny "yes" answer above indicates n Imminent Threat to Public Heal			☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)		
		omments/Explanation: one of the above found.					
2.	Ta	ank Integrity — Compliance com	ponent	#2 of 5			
	Co	ompliance criteria:			Ve	rification method(s):	
		stem consists of a seepage pit, sspool, drywell, or leaching pit.	☐ Yes	⊠ No		Probed tank(s) bottom  Examined construction records	
	Se	epage pits meeting 7080.2550 may be mpliant if allowed in local ordinance.				Examined Tank Integrity Form (Attach)  Observed liquid level below operating depth	
	Sewage tank(s) leak below their designed operating depth.		☐ Yes  ☐ No		☐ Examined empty (pumped) tanks(s)		
	If yes, which sewage tank(s) leaks:			<ul><li>☐ Probed outside tank(s) for "black s</li><li>☐ Unable to verify (See Comments/Exp</li></ul>			
	Any "yes" answer above indicates the system is Failing to Protect Groundwater.				☐ Other methods not listed (See Comments/Explanation)		
	Comments/Explanation:						
	Lowered underwater camera into tank - baffles and tank walls OK.						
3.	Ot	ther Compliance Conditions	: — Comr	oliance compone	nt #3	of 5	
<u> </u>	a.	Maintenance hole covers are damaged		<u> </u>			
	b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☒ No ☐ Unknot *System is an imminent threat to public health and safety						
	Explain:						
	C.	c. System is non-protective of ground water for other conditions as determined by inspector ☐ Yes* ☒ No *System is failing to protect groundwater				ned by inspector ☐ Yes* ☒ No	
		Explain:					

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Pro	perty address: 13120 Lynch Rd, May Twp, MN	55038		Inspector initials/Date:	3/7/2019 <b>BH</b> ()	
4.	Soil Separation — Compliance compor	nent #4 c	of 5			
	Date of installation: 1987  Shoreland/Wellhead protection/Food Beverage Lodging?  Compliance criteria:	☐ Unkr	nown No	Verification method(s):  Soil observation does not expire. Previous soil observations by two independent parties are suffiunless site conditions have been altered or local		
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:  Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.	Yes	⊠ No	requirements differ.  Conducted soil observation(s Two previous verifications (A Not applicable (Holding tank(s) Unable to verify (See Comments) Other (See Comments/Explana	Attach boring logs) s), no drainfield) nts/Explanation)	
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes	□ No	Comments/Explanation:		
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*					
	"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)	☐ Yes	□ No	A. Bottom of distribution media	See Attached Boring Log(s)	
	Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.			B. Periodically saturated soil/bedroo     C. System separation		
	Any "no" answer above indicates the Failing to Protect Groundwater.	<ul> <li>_D. Required compliance separation</li> <li>*May be reduced up to 15 perce Ordinance.</li> </ul>				
5.	Operating Permit and Nitrogen B	<b>MP*</b> – C	Compliance c	omponent #5 of 5 Not a	pplicable	
	Is the system operated under an Operating Permit? Yes No If "yes", A below is required  Is the system required to employ a Nitrogen BMP? Yes No If "yes", B below is required  BMP=Best Management Practice(s) specified in the system design  If the answer to both questions is "no", this section does not need to be completed.					
	Compliance criteria					
	Operating Permit number:     Have the Operating Permit requirements by	oeen met	?	☐ Yes ☐ No		
	b. Is the required nitrogen BMP in place and	properly	functioning?	☐ Yes ☐ No		
	Any "no" answer indicates Noncompliance.					

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats


# Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information


This information will be used for the purpose of conducting an MPCA Compliance Inspection.

D . CI .: M 1.7.2010	T: 10.00 AM				
Date of Inspection: March 7, 2019	Time: 10:00 AM				
Property Address: 13120 Lynch Rd, May Twp, MN	Zip: 55038				
Property Owner: James Berg	Phone:				
1 1	tment System Other				
Septic 1 Fiberglass Son Fice					
	lless trench Experimental system				
	ber trench Cesspool system				
Holding Concrete Seepa					
Other: Block Moun Other At-gra					
— — — — ·					
Are the tank maintenance covers accessible? $\square$ Yes					
performed through the maintenance holes. Maintena					
the ground surface to facilitate access and proper ma	intenance of the system.				
Year house built: 1987 Year septic installed:	i i				
	Number of residents in home? 2				
	drained by gravity? Y				
Garbage disposal? N W	hirlpool bath? N				
More than one system (laundry, etc.)? N					
Does this property have any footing drain tiles conne	ected to the septic system? N				
Are any buildings on this property such as garages or out-buildings connected to this system? N					
Are there any additional systems on this property serving other buildings? N					
Location of septic system on lot? North Side					
Location of water well on lot?	Is the well a deep well? Y				
Have you ever experienced any problems with the sy	stem such as: tree roots, sewage back-ups,				
surfacing of sewage onto the ground, septic tank over					
to the system? N If yes, explain:					
	Name of pumper: Smilie's Sewer Service				
How often pumped in previous years? Every 3  Is system on a monitoring plan? N					
Have you received notices from any government agency concerning this system? N					
Is your property located in a shoreland management area? N					
Do you have any additional information that should be given to the new owner? N					

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant: James Berg Signature On File Date: 3/7/2019

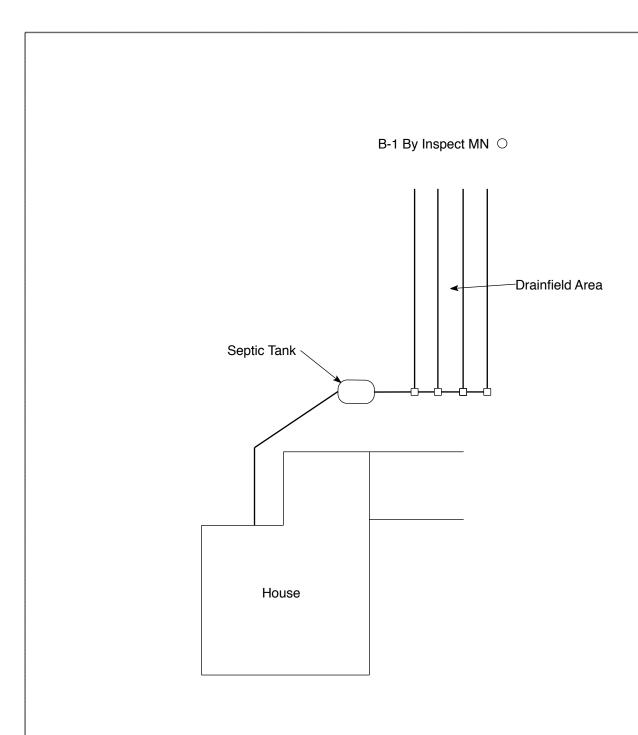



#### **Log Of Soil Borings**

Location of Project: 13120 Lynch Rd, May Twp, MN 55038					
Borings Made By: Inspect Minnesota			Date: 3/7/1		3/7/19
Auger Used: Hand/Bucket			Classification System: USDA		USDA
Boring Number: 1			Boring Number:		
Surface Elevation of drainfield trench		Surface Elevation			
Boring Depth In Inches	In Soils Encountered		Boring Depth In Inches	Soils Encountered	
0-22 22-30 30-40 40-70	10YR 3, 10YR 4/4 7.5YR 5/8 & 10YR 3/4 Fine	2 Loamy Sand /4 Silt Loam Silt Loam With 10YR 7/2 Redox 2 Sandy Loam With 7/2, & 7.5YR 7/3 Redox	THEIRES		
30"	Depth To End Of B	oring Or Redox		Depth To End Of Bo	oring Or Redox
Same	same Elevation Of Boring Relative To System			Elevation Of Boring	Relative To System
48" Depth To Bottom Of Distribution Media =0" Of Separation			Depth To Bottom C Of Separation	f Distribution Media	
	End Of Boring At:	70"		End Of Boring At:	
	Redox Present At:	30"		Redox Present At:	
Standing Water Present At: None			Water Present At:		

Bottom Of Distribution Medium At: 48 Inches

#### **DISCLAIMER**

# Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

# Subsurface Sewage Treatment Systems

Non-transferable

# Business License

# Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2019

Issued: 11/20/2018

## Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

## **Designated Certified Individual(s):**

Cert #	Name	Certification Expires:
C9633	Anthony P Scully	3/5/2020
	Installer, Designer (Apprentice)	, v , *
C5342	Brian L Humpal	10/15/2023
	Installer, Maintainer, Serv Prov, Adv	Designer, Adv Inspector
C9852	Christopher R Uebe	3/4/2021
	Designer, Inspector	



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Nich Haig

Nick Haig, Supervisor Certification and Training Unit