### **Inspect Minnesota & Midwest Soil Testing**

P.O. Box 383 Hugo, MN 55038

Brian Humpal

651-492-7550/Brian@midwestsoiltesting.com

MPCA Licensed Advanced Inspector

### SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 6629 Crackleberry Ct, Woodbury, MN 55129

### **REPORT SUMMARY**

I have performed an "MPCA Compliance Inspection" on this system. I contacted Washington County and was advised that there are no records for this system. This very old system (installed in approximately 1985) consists of a pre-cast septic tank and a rock trench drainfield.

Predicated on my inspection of the system, it is my opinion that this system <u>presently</u> <u>meets MPCA minimum compliance inspection requirements.</u>

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Brian Humpal Brian Humpal



St. Paul, MN 55155-4194

### **Compliance Inspection Form**

### Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

For local tracking purposes: Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply. Submit completed form to Local Unit of Government (LUG) and system owner within 15 days System Status System status on date (mm/dd/yyyy): 7/6/2016 **◯** Compliant – Certificate of Compliance Noncompliant - Notice of Noncompliance (Valid for 3 years from report date, unless shorter time (See Upgrade Requirements on page 3) frame outlined in Local Ordinance.) Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) - Imminent threat to public health and safety Other Compliance Conditions (Compliance Component #3) - Imminent threat to public health and safety ☐ Tank Integrity (Compliance Component #2) – Failing to protect groundwater Other Compliance Conditions (Compliance Component #3) - Failing to protect groundwater Soil Separation (Compliance Component #4) – Failing to protect groundwater Operating permit/monitoring plan requirements (Compliance Component #5) – Noncompliant **Property Information** Parcel ID# or Sec/Twp/Range: Property address: 6629 Crackleberry Ct, Woodbury, MN 55129 Reason for inspection: Property Sale Property owner: Tomi & James Ryba Owner's phone: or Owner's representative: Representative phone: Local regulatory authority: Washington County Regulatory authority phone: 651-430-4052 Brief system description: Pre-cast septic tank and a rock trench drainfield. Comments or recommendations: Certification I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage. Inspector name: Brian Humpal Certification number: L5342 Business name: Inspect Minnesota, Midwest Soil Testing License number: L2896 Inspector signature: Phone number: 651-492-7550 **Necessary or Locally Required Attachments** Soil boring logs System/As-built drawing Other information (list): Report Summary, Property Information, Disclaimer, License

1.	lm	Impact on Public Health — Compliance component #1 of 5								
	Sy gro Sy or Sy dw An	restem discharge sewage to the bound surface.  restem discharge sewage to drain tile surface waters.  restem cause sewage backup into restablishment.			rification method(s) Searched for surface of Searched for seeping in Excessive ponding in seeping in Second solid above soil of System requires "emeroperformed dye test Unable to verify (See Control of See Control of	outlet n yard/backup ir soil system/D-bo (See Comments/I dispersal system rgency" pumping omments/Explana	xes Explanation) I I tion)			
2.	Τa	ank Integrity — Compliance con	nponent #2 of 5							
3.	Sy ce: Se con Se de If y	estem consists of a seepage pit, sspool, drywell, or leaching pit.  Repage pits meeting 7080.2550 may be impliant if allowed in local ordinance.  Rewage tank(s) leak below their signed operating depth.  Reyes, which sewage tank(s) leaks:  Reyes" answer above indicated and in a sewage tank in a	oundwater. baffles and tank wa		rification method(s) Probed tank(s) bottom Examined construction Examined Tank Integri Observed liquid level b Examined empty (pum Probed outside tank(s) Unable to verify (See Conter methods not liste	records ty Form (Attach) pelow operating of ped) tanks(s) for "black soil" comments/Explana	tion)			
	a.	. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. ☐ Yes* ☒ No ☐ Unknown								
b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☒ No *System is an imminent threat to public health and safety						Unknown				
		Explain:								
	C.	System is non-protective of ground water for other conditions as determined by inspector  \( \subseteq \text{Yes*} \) \( \subseteq \text{No} \) *System is failing to protect groundwater  Explain:								

Property address: 6629 Crackleberry Ct, Woodbury, MN 55129

Inspector initials/Date: 7/6/2016

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • 3 off9TY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Date of installation: 1985?	☐ Unkı	nown	V	erification method(s):		
Shoreland/Wellhead protection/Food Beverage Lodging?	⊠ Yes □ No		Soil observation does not expire. Previous soil			
Compliance criteria:				observations by two independent parties are sufficient unless site conditions have been altered or local		
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	Yes	□No		equirements differ.  Conducted soil observation(s) (and the conducted soil observation(s) (and the conducted soil observations (Atta)  Not applicable (Holding tank(s), not applicable (Holding tank(s	ch boring logs)	
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.				Unable to verify (See Comments) Other (See Comments/Explanation		
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	⊠ Yes	□ No	С	omments/Explanation:		
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
"Experimental", "Other", or "Performance"	☐ Yes ☐	☐ No	 □ No        In	dicate depths of elevations		
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			_A.	Bottom of distribution media	See Attached Boring Log(s)	
Drainfield meets the designed vertical			_B.	Periodically saturated soil/bedrock		
separation distance from periodically saturated soil or bedrock.			C.	System separation		
			D.	Required compliance separation*		
Any "no" answer above indicates the system is Failing to Protect Groundwater.  *May be reduced up to 15 percent if allowed by Ordinance.						
Operating Permit and Nitrogen B	<b>MP*</b> – 0	Complian	ce com	ponent #5 of 5 🔀 <b>Not app</b>	licable	
Is the system operated under an Operating Per	mit?	☐ Yes	⊠ No	If "yes", A below is required		
s the system required to employ a Nitrogen BMP?			⊠ No	If "yes", B below is required		
BMP=Best Management Practice(s) specified in the system design						
If the answer to both questions is "no", this section does not need to be completed.  Compliance criteria						
Have the Operating Permit requirements been met?  b. Is the required nitrogen BMP in place and properly functioning?				☐ Yes ☐ No		
				Yes No		

Property address: 6629 Crackleberry Ct, Woodbury, MN 55129

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.


www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • 4 of ISTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3

Inspector initials/Date: 7/6/2016

### **Inspect Minnesota & Midwest Soil Testing**

### Subsurface Sewage Treatment System Owner/Property Information This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: July 6, 2016	Time: 9:30 AM					
Property Address: 6629 Crackleberry Ct, Woodbury, MN	Zip: 55129					
Property Owner: Tomi & James Ryba	Phone:					
Tank(s) Septic 1 Sept	Other  Alternative system Experimental system Cesspool system Other system					
Are the tank maintenance covers accessible?   Yes  No *If no, proper maintenance must be performed through the maintenance holes. Maintenance hole covers should be made accessible to the ground surface to facilitate access and proper maintenance of the system.						
	Гank size (gals.):					
	sidents in home?					
Number of bedrooms? 5 Are all floors drained by g	, ,					
Garbage disposal? Y Whirlpool bath?						
More than one system (laundry, etc.)?						
Does this property have any footing drain tiles connected to the se	ptic system?					
Are any buildings on this property such as garages or out-buildings connected to this system?						
Are there any additional systems on this property serving other buildings?						
Location of septic system on lot? Southeast Side						
	well a deep well? Y					
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system?  If yes, explain:						
When was the system last pumped? 2008 Name of pum	1					
How often pumped in previous years?  Is system on a monitoring plan?						
Have you received notices from any government agency concerning this system?						
Is your property located in a shoreland management area? N						
Do you have any additional information that should be given to the new owner?						
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.						
Owner/Occupant:	Date:					

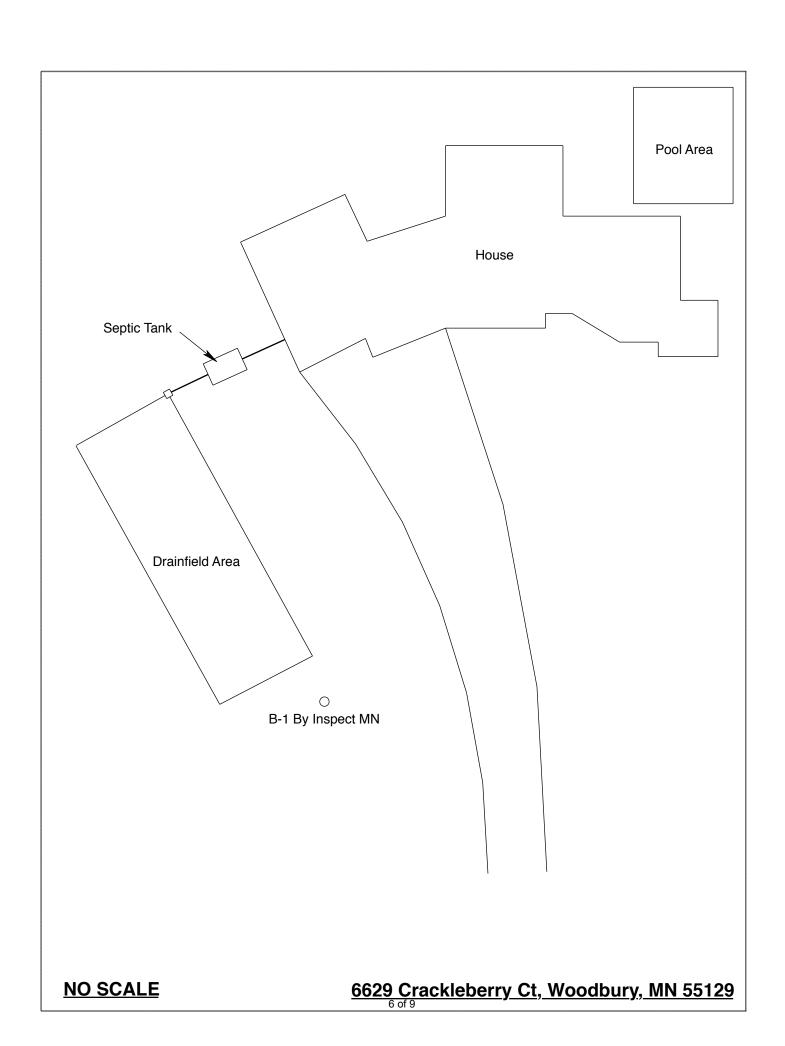

### **Log Of Soil Borings**

Loca	ation of Project:	6629 Crackleberry C	Ct, Woodbu	ıry, MN 55129	
Во	rings Made By:	Inspect Minnesota	Date:		7/6/16
	Auger Used: Hand/Bucket			ification System:	USDA
Boring Number: 1			Boring Number:		
Surface		93.00'	Surface	<u>:</u>	
Elevation o	of Benchmark =	f Benchmark = 100.00' at garage		of	
Boring	floor		Boring		
Depth In	Soils Encountered		Depth In	Soils Encountered	
Inches 0-14	10VD	2/2 Loam	Inches		
14-46		4/3 Loam			
64-80		m Sand With Gravel			
		lock Fragments			
89.50' E	levation To Bottom	of Distribution Media		Elevation To Bottom	Of Distribution Media
-86.33' Depth To Redox Or End Of Boring		Depth To Redox			
3.17'/38" Of Separation			Of Separation		
	- 1065	0.0"		E 106B	
	end Of Boring At:	80"		End Of Boring At:	
Redox Present At: None			Redox Present At:		
Standing Water Present At: None			Standing	Water Present At:	

Bottom Of Distribution Medium At: 42" Or Elevation 89.50' At Soil Probe

### **DISCLAIMER**

### Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

# Sulbsurface Sewage Treatment Systems

Non-transferable



License # L2896

Maintainer License Expires:

Adv Inspector License Expires:

Oct 28, 2015 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016 Dec 22, 2016

Adv Designer License Expires:

Date of Issuance:

Installer License Expires:

### Certification

Inspect Minnesota, Midwest Soil Testing

Expires

10/15/2017 10/15/2017

Advanced Designer (Certified) Advanced Inspector (Certified)

Maintainer (Certified)

Certification Type

**Designated Certified** 

Individual (DCI) Brian L. Humpal Brian L. Humpal Brian L. Humpal Brian L. Humpal Brian L. Humpal

10/15/2017

10/15/2017

10/15/2017

Service Provider (Certified)

Installer (Certified)

Designer (Certified) Inspector (Certified)

Christopher R. Uebe Christopher R. Uebe

03/04/2018

03/04/2018

Steven Giddings Manager Environmental Business Assistance Section



## Minnesota Pollution Control Agency

520 Lafayette Road North St. Paul, Minnesota 55155-4194