Inspect Minnesota & Midwest Soil Testing

P.O. Box 383 Hugo, MN 55038

Brian Humpal

651-492-7550/Brian@midwestsoiltesting.com

MPCA Licensed Designer & Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM COMPLIANCE REPORT

Inspection Address: 14860 Scandia Trail N, Scandia, MN 55073

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this septic system. I contacted Washington County and was advised that there are no records for this system. This very old system consists of a pre-cast septic tank and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(D) because of the lack of the required three foot separation between the bottom of the drainfield and seasonally saturated soils.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact Washington County Environmental Specialist, Mr. Chris LeClair (651-430-4052), to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Contrequirements and attached forms – additional local requirements ma	
Submit completed form to Local Unit of Government (LUG) an within 15 days	d system owner
System Status	
System status on date (mm/dd/yyyy):12/27/2016	
Compliant – Certificate of Compliance (Valid for 3 years from report date, unless shorter time frame outlined in Local Ordinance.)	Noncompliant – Notice of Noncompliance (See Upgrade Requirements on page 3)
Reason(s) for noncompliance (check all applicable) Impact on Public Health (Compliance Component #1) Other Compliance Conditions (Compliance Component Tank Integrity (Compliance Component #2) – Failing to Other Compliance Conditions (Compliance Component Soil Separation (Compliance Component #4) – Failing Operating permit/monitoring plan requirements (Comp	- Imminent threat to public health and safety at #3) – Imminent threat to public health and safety to protect groundwater at #3) – Failing to protect groundwater g to protect groundwater
	· · · · · · · · · · · · · · · · · · ·
Droporty Information	D
Property Information Parcel II Property address: 14860 Scandia Trail N, Scandia, MN 55073	D# or Sec/Twp/Range: Reason for inspection: Property Sale
Property owner: Todd Cunningham	Owner's phone:
or	
Owner's representative:	Representative phone:
Local regulatory authority: Washington County	Regulatory authority phone: 651-430-4052
Brief system description: Pre-cast septic tank and a rock trench Comments or recommendations:	drainfield.
Certification	
I hereby certify that all the necessary information has been gathered determination of future system performance has been nor can be repossible abuse of the system, inadequate maintenance, or future versions.	nade due to unknown conditions during system construction,
Inspector name: Brian Humpal	Certification number: L5342
Business name: Inspect Minnesota, Midwest Soil Testing	License number: L2896
Inspector signature: Brian Humpal	Phone number: 651-492-7550
Necessary or Locally Required Attachments	
Soil boring logs	☐ Forms per local ordinance
☐ Other information (list): Report Summary, Property Information	•

1.	Impact on Public Health — Compliance component #1 of 5					
	Sy gro	estem discharge sewage to the bund surface. Instem discharge sewage to drain tile surface waters. Instem cause sewage backup into establishment. In y "yes" answer above indicates in Imminent Threat to Public Heal comments/Explanation: In the content of the above found.	-	Verification method(s): ☐ Searched for surface outlet ☐ Searched for seeping in yard/backup in home ☐ Excessive ponding in soil system/D-boxes ☐ Homeowner testimony (See Comments/Explanation) ☐ "Black soil" above soil dispersal system ☐ System requires "emergency" pumping ☐ Performed dye test ☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)		
2.	Ta	ank Integrity – Compliance com	nponent #2 of 5			
3.	Syce Secon Sede de If y	estem consists of a seepage pit, sspool, drywell, or leaching pit. Repage pits meeting 7080.2550 may be impliant if allowed in local ordinance. Rewage tank(s) leak below their signed operating depth. Reyes, which sewage tank(s) leaks: Reyes" answer above indicates a failing to Protect Green is Failing to Protect Green is wered underwater camera into tank - between the compliance Conditions	oundwater. paffles and tank walls			
	 a. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. Yes* No Unknown b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. Yes* No Unknown *System is an imminent threat to public health and safety Explain: c. System is non-protective of ground water for other conditions as determined by inspector Yes* No *System is failing to protect groundwater Explain: 					

Property address: _ 14860 Scandia Trail N, Scandia, MN 55073

Inspector initials/Date: 12/27/2016

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • 3 of 979Y 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Date of installation:	_ ⊠ Unkı	nown	V	erification method(s):		
Shoreland/Wellhead protection/Food Beverage Lodging?	☐ Yes	⊠ No	S	oil observation does not expire. F bservations by two independent p		
Compliance criteria:	Compliance criteria:			unless site conditions have been altered or local		
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical	☐ Yes	□ No		conducted soil observation(s) Two previous verifications (Atta Not applicable (Holding tank(s), i	ach boring logs) no drainfield)	
separation distance from periodically saturated soil or bedrock.				Unable to verify (See Comments Other (See Comments/Explanation		
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes	⊠ No	С	omments/Explanation:		
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*						
"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV	☐ Yes	☐ Yes ☐ No		dicate depths of elevations		
or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			_A.	Bottom of distribution media	See Attached Boring Log(s)	
Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.				Periodically saturated soil/bedrock System separation		
saturated soil of bedrock.				Required compliance separation*		
Any "no" answer above indicates the system is Failing to Protect Groundwater.				*May be reduced up to 15 percent if allowed by Local Ordinance.		
. Operating Permit and Nitrogen I	3MP* – 0	Complian	ce com	ponent #5 of 5 🔀 Not ap	olicable	
Is the system operated under an Operating Pe		•		If "yes", A below is required		
Is the system required to employ a Nitrogen BMP?				-		
BMP=Best Management Practice(s) specified in the system design						
If the answer to both questions is "no", this section does not need to be completed. Compliance criteria						
						a. Operating Permit number:
Have the Operating Permit requirements been met?			☐ Yes ☐ No			
b. Is the required nitrogen BMP in place and properly functioning?						

Property address: 14860 Scandia Trail N, Scandia, MN 55073

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.


www.pca.state.mn.us • 651-296-6300 • 800-657-3864 wq-wwists4-31 • 1/24/12 Page 3 of 3

Inspector initials/Date: 12/27/2016

Inspect Minnesota & Midwest Soil Testing

Subsurface Sewage Treatment System Owner/Property Information This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: December 27, 2016	Time: 12:15 PM					
Property Address: 14860 Scandia Trail N, Scandia, MN	Zip: 55073					
Property Owner: Todd Cunningham	Phone:					
Tank(s) Tank(s)Material Soil Treatment System Septic 1 □Fiberglass □Rock trench □Aerobic □Plastic □Gravelless trench □Lift □Metal □Chamber trench □Holding □Concrete □Seepage bed □Other: □Block □Mound □Other □At-grade	Other Alternative system Experimental system Cesspool system Other system					
Are the tank maintenance covers accessible? Yes No *If no, proper maintenance must be performed through the maintenance holes. Maintenance hole covers should be made accessible to the ground surface to facilitate access and proper maintenance of the system.						
	Tank size (gals.):					
	sidents in home?					
Number of bedrooms? Are all floors drained by g						
Garbage disposal? Whirlpool bath?	,					
More than one system (laundry, etc.)?						
Does this property have any footing drain tiles connected to the se	eptic system?					
Are any buildings on this property such as garages or out-building	s connected to this system?					
Are there any additional systems on this property serving other buildings?						
Location of septic system on lot? North Side						
	e well a deep well?					
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:						
When was the system last pumped? Name of pum	1					
How often pumped in previous years?						
Have you received notices from any government agency concerning this system?						
Is your property located in a shoreland management area? N						
Do you have any additional information that should be given to the new owner?						
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.						
Owner/Occupant:	Date:					

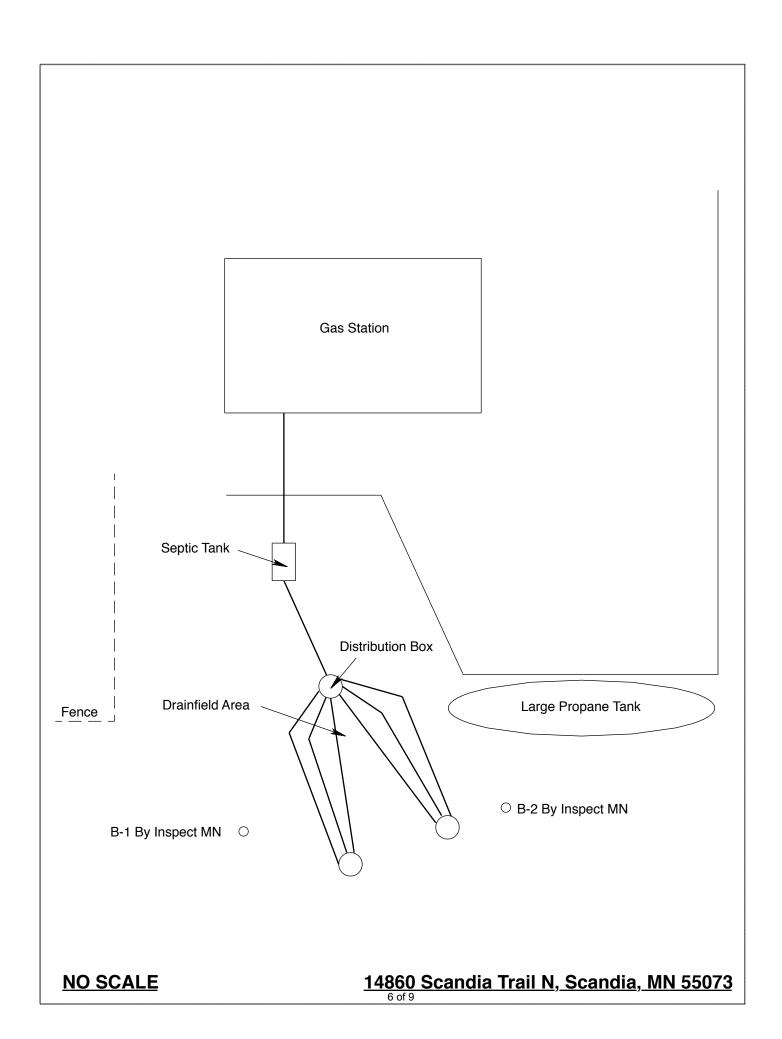

Log Of Soil Borings

Location of Project: 14860 Scandia Trail N, Scandia, MN 55073					
Borings Made By: Inspect Minnesota			Date:		12/27/16
Auger Used: Hand/Bucket		Classification System:		USDA	
Во	ring Number:	1		Boring Number:	2
Surface Elevation of Boring Same ground surface as last drainfield trench		FIEVALION OLI		nd surface as last Tield trench	
Depth In Inches	Soils E	ncountered	Depth In Inches	Soils Encountered	
I ' SOUS FOCOUNTARAO		0-10 10-40	10YR 3/4 Fine 7.5YR 7/8, 7.	'2 Silt Loam Loamy Sand With 5YR 5/8, 5YR 4/6 6/2 Redox	
9" Depth To End Of Boring Or Redox		10"	Depth To End Of Boring Or Redox		
		g Relative To System	Same	Elevation Of Boring Relative To System	
-72" Depth To Bottom Of Distribution Media =0" Of Separation		-72" Depth To Bottom Of Distribution Media =0" Of Separation			
End Of Boring At: 50"			End Of Boring At:	40"	
	dox Present At:	9"		Redox Present At:	10"
Standing Water Present At: None			Standing	Water Present At:	

Bottom Of Distribution Medium At: ≈72 Inches

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems



Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2017

Issued: 11/29/2016

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #

Name

Certification Expires:

C5342

Brian L Humpal

10/15/2017

Installer, Maintainer, Serv Prov, Adv Designer, Adv Inspector

C9852

Christopher R Uebe

3/4/2018

Designer, Inspector



St. Paul, Minnesota 55155-4194

Steven Giddings, Manager

Prevention and Solid Waste Management Section