#### **Inspect Minnesota & Midwest Soil Testing**

P.O. Box 383 Hugo, MN 55038

Brian Humpal

651-492-7550/Brian@midwestsoiltesting.com

MPCA Licensed Advanced Inspector

#### SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

**Date:** March 15, 2017 **Time:** 1:45 PM **Owner:** Steven & Sara Wolsfeld

**Inspection Address:** 11855 Isleton Ave N, Grant, MN 55082

#### REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at Washington County. This system consists of two pre-cast septic tanks, a pre-cast lift tank, and a rock trench drainfield.

Predicated on my inspection of the system and my review of the original design/permit records, it is my opinion that this system <u>presently meets</u> MPCA minimum compliance inspection requirements.

Inspect Minnesota and Midwest Soil Testing have been hired to perform a compliance inspection of this SSTS for compliance with local ordinances pursuant to Minn. Stat. § 115.55 (2013). This compliance inspection covers only the criteria required by Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011). A compliance inspection is an indication of the current compliance status of the system and does not guarantee the performance or longevity of this system beyond the date of inspection, as it is impossible to determine the future performance of any system. Inspect Minnesota and Midwest Soil Testing disclaim any use of this compliance inspection beyond determining SSTS compliance pursuant to Minn. Stat. § 115.55 Subd. 5a (2013) and Minn. R. 7080.1500 (2011).

Please contact me should you have any questions.

Brian Humpal Brian Humpal



## **Compliance Inspection Form**

## Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

	, , , , , , , , , , , , , , , , , , ,
<b>Instructions:</b> Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days	
System Status	
System status on date (mm/dd/yyyy):3/15/2017	
	npliant – Notice of Noncompliance grade Requirements on page 3)
Reason(s) for noncompliance (check all applicable)	
<ul> <li>☐ Impact on Public Health (Compliance Component #1) – Imminent threat to</li> <li>☐ Other Compliance Conditions (Compliance Component #3) – Imminent threat to</li> <li>☐ Tank Integrity (Compliance Component #2) – Failing to protect groundwa</li> <li>☐ Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwa</li> <li>☐ Soil Separation (Compliance Component #4) – Failing to protect groundwa</li> <li>☐ Operating permit/monitoring plan requirements (Compliance Component #4)</li> </ul>	reat to public health and safety ter otect groundwater vater
Property Information Parcel ID# or Sec/Twp/Range	ge:
Property address: 11855 Isleton Ave N, Grant, MN 55082 Reason f	or inspection: Property Sale
Property owner: Steven & Sara Wolsfeld Owner's	phone:
or Owner's representative: Caryn Henriksen (Keller Williams) Represen	ntative phone: 651-307-8791
· · · · · · · · · · · · · · · · · · ·	ry authority phone: 651-430-4052
Brief system description: Two pre-cast septic tanks, a pre-cast lift tank, and a rock t	
Comments or recommendations:	
Certification	
I hereby certify that all the necessary information has been gathered to determine the determination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.	
Inspector name: Brian Humpal Certificat	ion number: L5342
Business name: Inspect Minnesota, Midwest Soil Testing Licer	nse number: L2896
Inspector signature: Brian Humpal Pho	one number: 651-492-7550
Necessary or Locally Required Attachments  ☐ Soil boring logs ☐ System/As-built drawing ☐ Forms per ☐ Other information (list): Report Summary, Property Information, Disclaimer, Lice	local ordinance cense

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 1 of 3

Property address: <u>11855 Isleton Ave N, Grant, MN 55082</u>

Inspector initials/Date: 3/15/2017

1.	ln	Impact on Public Health - Compliance component #1 of 5				
	Co	ompliance criteria:		Verification method(s):		
		stem discharge sewage to the ound surface.	☐ Yes ☒ No	<ul> <li>✓ Searched for surface outlet</li> <li>✓ Searched for seeping in yard/backup in home</li> </ul>		
	-	stem discharge sewage to drain tile surface waters.	☐ Yes ⊠ No	<ul> <li>☑ Excessive ponding in soil system/D-boxes</li> <li>☐ Homeowner testimony (See Comments/Explanation)</li> <li>☐ "Black soil" above soil dispersal system</li> </ul>		
		rstem cause sewage backup into reling or establishment.	☐ Yes ⊠ No	System requires "emergency" pumping  Performed dye test		
	Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.			☐ Unable to verify (See Comments/Explanation) ☐ Other methods not listed (See Comments/Explanation)		
	Comments/Explanation: None of the above found.			, , , , , , , , , , , , , , , , , , , ,		
	140	one of the above found.				
2.	Ta	ank Integrity – Compliance com	nponent #2 of 5			
		ompliance criteria:		Verification method(s):		
		stem consists of a seepage pit, sspool, drywell, or leaching pit.	☐ Yes ⊠ No	☐ Probed tank(s) bottom		
	Se	epage pits meeting 7080.2550 may be		<ul><li>Examined construction records</li><li>Examined Tank Integrity Form (Attach)</li></ul>		
		mpliant if allowed in local ordinance.		☐ Observed liquid level below operating depth		
		ewage tank(s) leak below their signed operating depth.	☐ Yes ⊠ No	Examined empty (pumped) tanks(s)		
	If y	yes, which sewage tank(s) leaks:		Probed outside tank(s) for "black soil"		
	Any "yes" answer above indicates the system is Failing to Protect Groundwater.			<ul> <li>☐ Unable to verify (See Comments/Explanation)</li> <li>☑ Other methods not listed (See Comments/Explanation)</li> </ul>		
	Сс	omments/Explanation:				
		wered underwater camera into tanks -				
	LII	t pump and alarm were operational at	the time of the inspection.			
3.	nt #3 of 5					
	<ul> <li>Other Compliance Conditions – Compliance component #3 of 5</li> <li>a. Maintenance hole covers are damaged, cracked, unsecured, or appear to structurally unsound. ☐ Yes* ☒ No ☐ Unknown</li> </ul>					
	b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☒ No ☐ Unknow *System is an imminent threat to public health and safety					
		Explain:				
	c. System is non-protective of ground water for other conditions as determined by inspector ☐ Yes* ☒ No *System is failing to protect groundwater					
		Explain:				

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Property address: 11855 Isleton Ave N, Grant, MN 55082

Inspector initials/Date: 3/15/2017

Date of installation: 2001	Unkr	nown	Verification method(s):		
Shoreland/Wellhead protection/Food Beverage Lodging?	☐ Yes	⊠ No	Soil observation does not expire. Previous soil		
Compliance criteria:			observations by two independent parties are suff unless site conditions have been altered or local		
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes	□ No	requirements differ.  Conducted soil observation(s) Two previous verifications (Atta	ch boring logs)	
Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.			☐ Unable to verify (See Comments ☐ Other (See Comments/Explanatio	/Explanation)	
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	⊠ Yes	□ No	Comments/Explanation: Reviewed design and permit record	ds.	
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*					
"Experimental", "Other", or "Performance" systems built under pre-2008 Rules; Type IV	☐ Yes	□ No	Indicate depths of elevations		
or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			A. Bottom of distribution media	See Attached Boring Log(s)	
Drainfield meets the designed vertical separation distance from periodically saturated soil or bedrock.			B. Periodically saturated soil/bedrock     C. System separation		
			D. Required compliance separation*		
Any "no" answer above indicates the system is Failing to Protect Groundwater.  *May be reduced up to 15 percent if allowed by Lo				if allowed by Local	
Tuning to Froteet eroundwater.			Ordinance.		
Operating Permit and Nitrogen B	<b>MP*</b> – 0	Compliance	component #5 of 5 Not app	licable	
Is the system operated under an Operating Peri			$\boxtimes$ No If "yes", A below is required		
Is the system required to employ a Nitrogen BMP?  Yes No If "yes", A below is required  If "yes", B below is required					
BMP=Best Management Practice(s) specified in the system design					
If the answer to both questions is "no", this section does not need to be completed.					
ii the answer to both questions is 'no',	uns sec	tion does	not need to be completed.		
Compliance criteria					
<ul> <li>a. Operating Permit number: Have the Operating Permit requirements been met?</li> <li>b. Is the required nitrogen BMP in place and properly functioning?</li> </ul>			☐ Yes ☐ No		
			☐ Yes ☐ No		


Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 3 of 3

## Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: March 15, 2017	Time: 1:45 PM					
Property Address: 11855 Isleton Ave N, Grant, MN	Zip: 55082					
Property Owner: Steven & Sara Wolsfeld	Phone:					
Tank(s) Tank(s)Material Soil Treatment System Septic 2 Fiberglass Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding Concrete Seepage bed Other: Block Mound Other At-grade	Other  Alternative system Experimental system Cesspool system Other system					
Are the tank maintenance covers accessible?   Yes   No *If no, proper maintenance must be performed through the maintenance holes. Maintenance hole covers should be made accessible to the ground surface to facilitate access and proper maintenance of the system.						
	Γank size (gals.): 2-1000					
	sidents in home?					
Number of bedrooms? 5 Are all floors drained by gr						
Garbage disposal? Whirlpool bath?	Y					
More than one system (laundry, etc.)?						
Does this property have any footing drain tiles connected to the septic system?  Are any buildings on this property such as garages or out-buildings connected to this system?						
Are there any additional systems on this property serving other but	ildings?					
Location of septic system on lot? West Side						
Location of water well on lot? Northeast Side  Is the well a deep well? Y						
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups, surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system?  If yes, explain:						
When was the system last pumped? 2016 Name of pum	per:					
How often pumped in previous years?						
Have you received notices from any government agency concerning this system?						
Is your property located in a shoreland management area? N						
Do you have any additional information that should be given to the new owner?						
I hereby certify that the above information is correct to the best of my knowledge considered "non-compliant/failing" per MPCA rules, that the inspector must by local government unit within 15 days of the date of inspection completion. I all this report, that I/we are ultimately responsible for payment of all fees for all wo	law submit a copy of this report to the so agree that unless otherwise noted in					

by Inspect Minnesota and Midwest Soil Testing. Owner/Occupant: Date:

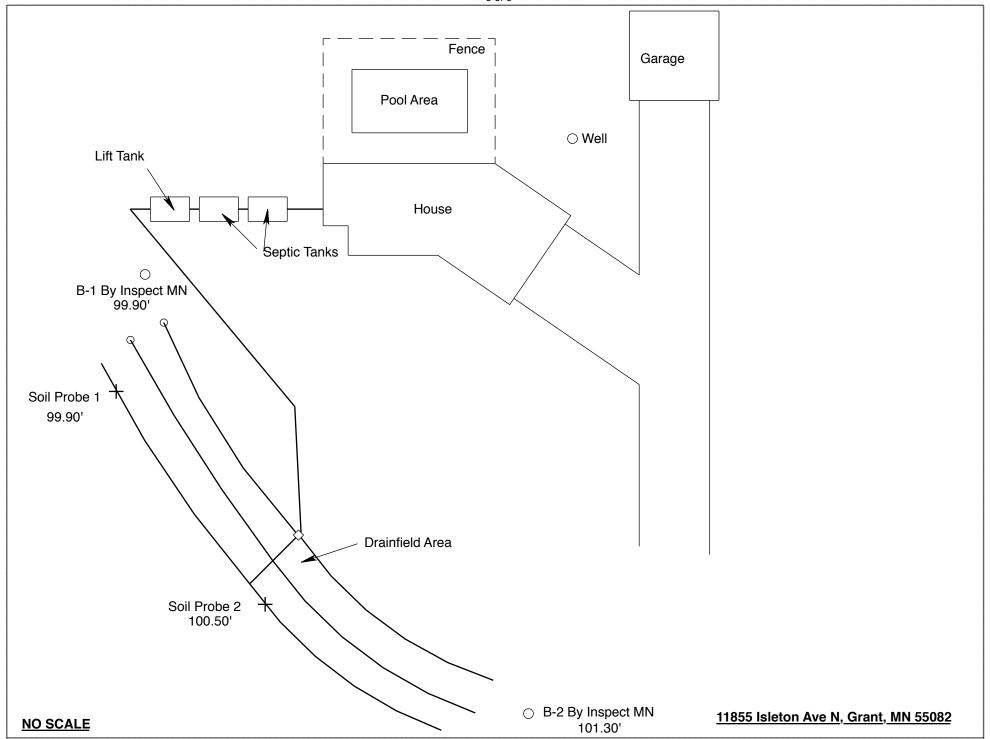

#### **Log Of Soil Borings**

Loca	Location of Project: 11855 Isleton Ave N, Grant, MN 55082					
Borings Made By: Inspect Minnesota				Date:	3/15/17	
Auger Used: Hand/Bucket		Class	ification System:	USDA		
Boring Number: 1		Boring Number:		2		
Surface		99.90'	Surface	Surface		
Elevation of	f Benchmark =	= 100.00' top of lift	Elevation	of	101.30'	
Boring	tank	c manhole	Boring			
Depth In	Soils Encountered		Depth In	Soils Encountered		
Inches	-		Inches			
0-8 8-14	•	Medium Sand Medium Sand	0-4 4-14		edium Sand (Fill) edium Sand (Fill)	
14-30		Medium Sand	14-27		Medium Sand	
30-47	-	Medium Sand	27-42		Coarse Sand With Gravel	
47-60	-	ine Sand With			ock Fragments	
60.76		mellae Banding	42-60		Coarse Sand With Gravel	
60-76		ine Sand With ellae Banding And	60-80		ock Fragments Im Coarse Sand With	
	-	10YR 6/2 Redox	00 00	-	n To Fine Sand Layers	
	,	.,		,	, , ,	
07.40		0(5)	97.17'		0651	
					of Distribution Media	
-94.81' Depth To Redox Or End Of Boring =2.59'/31" Of Separation		-94.63' Depth To Redox =2.54'/31" Of Separation				
-2.33 / 31   Of Separation						
E	nd Of Boring At:	76"		End Of Boring At:	80"	
Re	edox Present At:	61"/94.81'	Redox Present At: None			
Standing W	Standing Water Present At: None			Water Present At:	None	

Bottom Of Distribution Medium At: 30" Or Elevation 97.40' At Soil Probe 1
Bottom Of Distribution Medium At: 40" Or Elevation 97.17' At Soil Probe 2

#### **DISCLAIMER**

## Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1<sup>st</sup> through April 1<sup>st</sup>) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

## Subsurface Sewage Treatment Systems

Non-transferable

# Business License

## Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2017

Issued: 11/29/2016

## Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

### Designated Certified Individual(s):

Cert #

Name

**Certification Expires:** 

C5342

**Brian L Humpal** 

10/15/2017

Installer, Maintainer, Serv Prov, Adv Designer, Adv Inspector

C9852

Christopher R Uebe

3/4/2018

Designer, Inspector



St. Paul. Minnesota 55155-4194

Steven Giddings, Manager

Prevention and Solid Waste Management Section