1 of 9

Inspect Minnesota & Midwest Soil Testing

P.O. Box 383 Hugo, I	MN 55038	Brian Humpal
651-492-7550/Brian@midw	vestsoiltesting.com MP	PCA Licensed Designer & Inspector
SUBSURFACE SEWAG	E TREATMENT SYST	TEM COMPLIANCE REPORT
Date: April 17, 2017	Time: 12:30 PM	Owner: Tom & Susan Stebbing
Inspection Address: 4270 Sce	enic Ln, Woodbury, MN 551	29

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system. This older system (installed in 1995) consists of two pre-cast septic tanks and a rock trench drainfield.

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(D) because of the lack of the required three foot separation between the bottom of the drainfield and seasonally saturated soils/bedrock.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact Washington County Environmental Specialist, Mr. Chris LeClair (651-430-4052), to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Brian Humpal Brian Humpal

Inspect Minnesota & Midwest Soil Testing

Subsurface Sewage Treatment System Owner/Property Information

This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: April 17, 2017	Time: 12:30 PM			
Property Address: 4270 Scenic Ln, Woodbury, MN	Zip: 55129			
Property Address: 4270 Scenic Ln, Woodbury, MN Property Owner: Tom & Susan Stebbing	Phone: 651-214-8094			
	ttment System Other			
Septic 2FiberglassRockAerobicPlasticGraveLiftMetalCham	trench Alternative system lless trench Experimental system ber trench Cesspool system ge bed Other system d			
Are the tank maintenance covers accessible? \boxtimes Yes	\square No *If no, proper maintenance must be			
performed through the maintenance holes. Maintena				
the ground surface to facilitate access and proper ma	intenance of the system.			
Year house built: 1995 Year septic installed:	1995 Tank size (gals.): 2-1000			
	Number of residents in home?			
	s drained by gravity?			
	hirlpool bath?			
	More than one system (laundry, etc.)?			
Does this property have any footing drain tiles connected to the septic system?				
Are any buildings on this property such as garages o	r out-buildings connected to this system?			
Are there any additional systems on this property serving other buildings?				
Are there any additional systems on this property set	ving other bundings:			
Location of septic system on lot? Northwest Side				
Location of water well on lot? South Side	Is the well a deep well? Y			
Have you ever experienced any problems with the sy	1			
surfacing of sewage onto the ground, septic tank over				
to the system? If yes, explain:	anowing, etc., of have any repairs been made			
When was the system last pumped? 2014	Name of pumper:			
How often pumped in previous years?	Is system on a monitoring plan?			
Have you received notices from any government age				
Is your property located in a shoreland management				
Do you have any additional information that should be given to the new owner?				

I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection by Inspect Minnesota and Midwest Soil Testing.

Owner/Occupant:

Submit completed form to Local Unit of Government (LUG) and system owner within 15 days System Status

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms - additional local requirements may also apply.

ystem status	
System status on date (mm/dd/yyyy):	4/17/2017

Compliant – Certificate of Compliance (Valid for 3 years from report date, unless shorter time frame outlined in Local Ordinance.)

Reason(s) for noncompliance (check all applicable)

- □ Impact on Public Health (Compliance Component #1) Imminent threat to public health and safety
- Other Compliance Conditions (Compliance Component #3) Imminent threat to public health and safety
- Tank Integrity (Compliance Component #2) Failing to protect groundwater
- Other Compliance Conditions (Compliance Component #3) Failing to protect groundwater
- Soil Separation (Compliance Component #4) Failing to protect groundwater
- Operating permit/monitoring plan requirements (Compliance Component #5) Noncompliant

Property Information

Parcel ID# or Sec/Twp/Range:

Property address:	4270 S	cenic Ln, Woodbury, MN 55129	Reason for inspect	tion: Property Sale
Property owner:	Tom & S	usan Stebbing	Owner's phone:	651-214-8094
or				
Owner's represent	tative:		Representative pho	one:
Local regulatory a	uthority:	Washington County	Regulatory authorit	ty phone:651-430-4052
Brief system desci	ription:	Two pre-cast septic tanks and a rock trench dra	ainfield.	
Comments or reco	mmendat	ions:		

Comments or recommendations:

Certification

I hereby certify that all the necessary information has been gathered to determine the compliance status of this system. No determination of future system performance has been nor can be made due to unknown conditions during system construction, possible abuse of the system, inadequate maintenance, or future water usage.

Inspector name:	Brian Humpal	Certification number:	L5342
Business name:	Inspect Minnesota, Midwest Soil Testing	License number:	L2896
Inspector signature	: Brian Humpol	Phone number:	651-492-7550

Necessary or Locally Required Attachments

🛛 Soil boring logs	System/As-built drawing	Forms per local ordinance
Other information (list):	Report Summary, Property Informa	tion, Disclaimer, License

Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems

(SSTS)

Doc Type: Compliance and Enforcement

S20 Latayette Road North St. Paul, MN 55155-4194

Minnesota Pollution Control Agency

For local tracking purposes:

🖄 Noncompliant – Notice of Noncompliance

(See Upgrade Requirements on page 3)

3 of 9

1. Impact on Public Health – Compliance component #1 of 5

Compliance criteria:		
System discharge sewage to the ground surface.	🗌 Yes 🖾 No	
System discharge sewage to drain tile or surface waters.	🗌 Yes 🛛 No	
System cause sewage backup into dwelling or establishment.	🗌 Yes 🖾 No	
Any "yes" anower above indicates the system is		

Any "yes" answer above indicates the system is an Imminent Threat to Public Health and Safety.

Comments/Explanation:

None of the above found.

Verification method(s):

- Searched for surface outlet
- Searched for seeping in yard/backup in home
- Excessive ponding in soil system/D-boxes
- Homeowner testimony (See Comments/Explanation)
- "Black soil" above soil dispersal system
- System requires "emergency" pumping
- Performed dye test
- Unable to verify (See Comments/Explanation)
- Other methods not listed (See Comments/Explanation)

2. Tank Integrity – Compliance component #2 of 5

Compliance criteria:

System consists of a seepage pit, cesspool, drywell, or leaching pit.	🗌 Yes	🛛 No
Seepage pits meeting 7080.2550 may be compliant if allowed in local ordinance.		
Sewage tank(s) leak below their designed operating depth.	🗌 Yes	🖾 No
If yes, which sewage tank(s) leaks:		

Any "yes" answer above indicates the system is Failing to Protect Groundwater.

Comments/Explanation:

Lowered underwater camera into tanks - baffles and tank walls OK.

Verification method(s):

Probed tank(s) bottom
Examined construction records
Examined Tank Integrity Form (Attach)
Observed liquid level below operating depth
Examined empty (pumped) tanks(s)
Probed outside tank(s) for "black soil"
Unable to verify (See Comments/Explanation)
Other methods not listed (See Comments/Explanation)

3. Other Compliance Conditions - Compliance component #3 of 5

a.	Maintenance hole covers	are damaged, cra	acked, unsecured,	or appear to structurally	unsound.	□ Yes*	🛛 No	Unknown

b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. \Box Yes* \boxtimes No \Box Unknown *System is an imminent threat to public health and safety

Explain:

C.	System is non-protective of ground water for other conditions as determined by inspector	□ Yes*	🛛 No
	*System is failing to protect groundwater		

Explain:


4. Soil Separation – Compliance component #4 of 5

Date of installation: 1995	_ 🗌 Unkr	nown	Verification method(s):	
Shoreland/Wellhead protection/Food Beverage Lodging?	🗌 Yes	🖾 No	Soil observation does not expire. Pl observations by two independent pl	
Compliance criteria:	1		unless site conditions have been al	
For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment: Drainfield has at least a two-foot vertical	☐ Yes	🛛 No	 requirements differ. Conducted soil observation(s) (A Two previous verifications (Attac Not applicable (Holding tank(s), n Unable to verify (See Comments/ 	ch boring logs) o drainfield)
separation distance from periodically saturated soil or bedrock.			Other (See Comments/Explanation	ı)
Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes	🗌 No	Comments/Explanation:	
Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*				
"Experimental", "Other", or "Performance"	🗌 Yes	🗌 No	Indicate depths of elevations	
systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)			A. Bottom of distribution media	See Attached Boring Log(s
Drainfield meets the designed vertical			B. Periodically saturated soil/bedrock	
separation distance from periodically			C. System separation	
saturated soil or bedrock.			D. Required compliance separation*	
Any "no" answer above indicates t Failing to Protect Groundwater.	he syst	em is	*May be reduced up to 15 percent i Ordinance.	f allowed by Loca
v				
Operating Permit and Nitrogen B	MP* – C	Compliance	e component #5 of 5 🛛 🛛 Not app	licable
Is the system operated under an Operating Per	mit?	🗌 Yes	⊠ No If "yes", A below is required	
Is the system required to employ a Nitrogen BN	/IP?	🗌 Yes	⊠ No If "yes", B below is required	
BMP=Best Management Practice(s) specif	fied in the	system des	sign	
If the answer to both questions is "no",	this sec	tion does	s not need to be completed.	
Compliance criteria				

a.	Operating Permit number:	🗌 Yes 🔲 No
	Have the Operating Permit requirements been met?	
b.	Is the required nitrogen BMP in place and properly functioning?	🗌 Yes 🔲 No

Any "no" answer indicates Noncompliance.

Upgrade Requirements (*Minn. Stat.* § 115.55) *An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.*

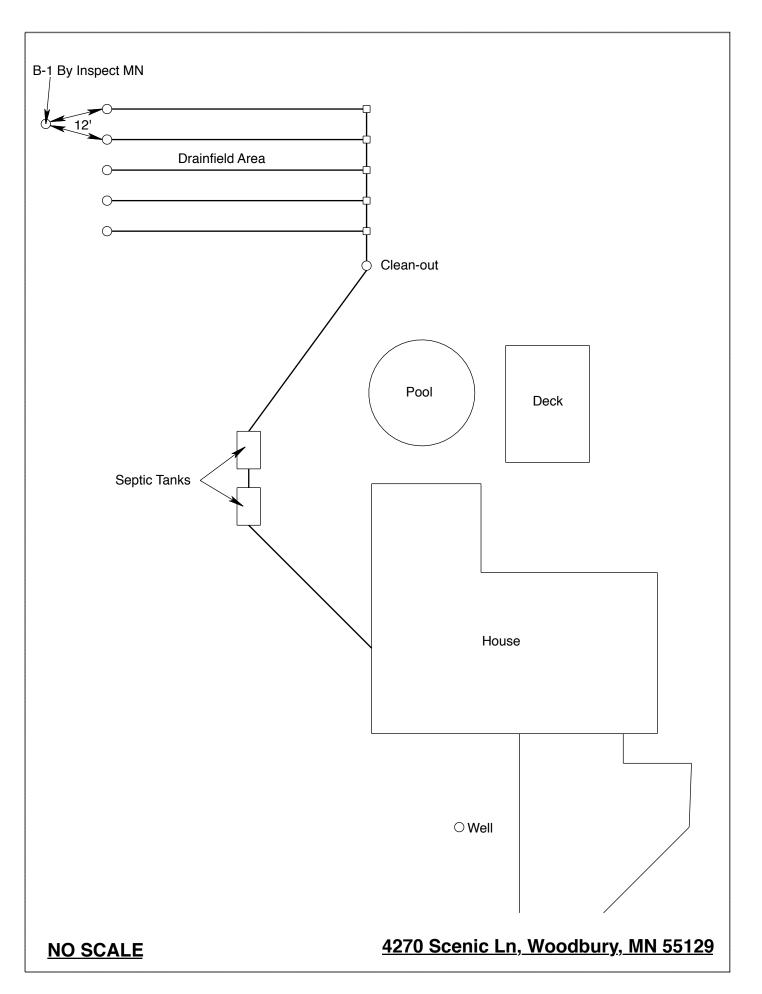

Log Of Soil Borings

Location of Project: 4270 Scenic Ln, Woodbury, MN 55129						
	Borings Made By: Inspect Minnesota			Date:	4/17/17	
	Auger Used: Hand/Bucket		Classifi	ication System:	USDA	
B	Boring Number: 1		Boring Number:			
Surface Elevation of Boring	Same ground surface as last		Surface Elevation o Boring	f		
Depth In Inches			Depth In Inches	Soils Er	countered	
0-6 6-24 24-33 33-46 46-58	10YR 4/4 S Few Bedr 10YR 2/2 7.5YR 10YR 4/3 Sa 2.5Y 6/6 Uncc With 7.5YR 5/8	/2 Silt Loam iandy Loam With ock Fragments Silt Loam With 5/8 Redox indy Loam (Moist) onsolidated Bedrock 8 & 10YR 7/1 Redox At 58" Bedrock				
24" De	24" Depth To End Of Boring Or Redox		D	epth To End Of Bo	oring Or Redox	
Same Elevation Of Boring Relative To System		EI	levation Of Boring	Relative To System		
				epth To Bottom C f Separation	f Distribution Media	
End Of Boring At: 58"			E	End Of Boring At:		
Redox Present At: 24"				edox Present At:		
Standing W	ater Present At:	None	Standing V	Vater Present At:		

Bottom Of Distribution Medium At: 27 Inches

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing

Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems Non-transferable Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2017

Issued: 11/29/2016

Specialty Area(s): Installer Maintainer Service Provider Advanced Designer Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expires:	
C5342	Brian L Humpal 10/15/2017 Installer, Maintainer, Serv Prov, Adv Designer, Adv Inspector		
C9852	Christopher R Uebe	3/4/2018	
C9052	Designer, Inspector	5/4/2016	



Minnesota Pollution Control Agency

520 Lafayette Road North St. Paul, Minnesota 55155-4194

Steven Giddings, Manager Prevention and Solid Waste Management Section