Inspect Minnesota & Midwest Soil Testing

P.O. Box 10853 White Bear Lake, MN 55110 651-492-7550/Brian@Midwestsoiltesting.com

Brian Humpal MPCA Licensed Advanced Inspector

SUBSURFACE SEWAGE TREATMENT SYSTEM (SSTS) COMPLIANCE REPORT

Inspection Address: 4187 Kirkwood Ln N, Lake Elmo, MN 55042

REPORT SUMMARY

I have performed an "MPCA Compliance Inspection" on this system and have reviewed the original design/permit records on file at the City of Lake Elmo. This system consists of two pre-cast septic tanks, a pre-cast lift tank, and a gravelless trench drainfield.

Although not a compliance criteria, it should be noted that gravelless pipe is no longer approved for installation in the State of Minnesota and we have had experience with this product having significantly reduced performance and/or life expectancy. We cannot guarantee the performance of this system beyond the compliance date (8/6/2019).

My inspection indicates that this system is presently "non-compliant" in accordance with MPCA rules 7080.1500 Subp.4(B)(D) because of the lack of the required three foot separation between the bottom of the drainfield and seasonally saturated soils.

In accordance with MPCA rules, I am sending a copy of this complete report to Washington County. I cannot officially speak on behalf of the County relative to the upgrade requirements of these non-compliant systems. Please contact the Washington County Department of Public Health & Environment (651-430-6655) to verify the County's position.

Please advise buyer, agents, lender, etc. to contact me should they have any questions regarding this system.

Christopher Uebe

Brian Humpal

Brian Humpal



Compliance Inspection Form

Existing Subsurface Sewage Treatment Systems (SSTS)

Doc Type: Compliance and Enforcement

Instructions: Inspection results based on Minnesota Pollution Control Agency (MPCA) requirements and attached forms – additional local requirements may also apply.	For local tracking purposes:
Submit completed form to Local Unit of Government (LUG) and system owner within 15 days	
System Status	
System status on date (mm/dd/yyyy): 8/6/2019	
•	pliant – Notice of Noncompliance ade Requirements on page 3)
Reason(s) for noncompliance (check all applicable) ☐ Impact on Public Health (Compliance Component #1) – Imminent threat to ☐ Other Compliance Conditions (Compliance Component #3) – Imminent thre ☐ Tank Integrity (Compliance Component #2) – Failing to protect groundwate ☐ Other Compliance Conditions (Compliance Component #3) – Failing to protect groundwate ☐ Soil Separation (Compliance Component #4) – Failing to protect groundwate ☐ Operating permit/monitoring plan requirements (Compliance Component #	eat to public health and safety er tect groundwater ater
Property Information Parcel ID# or Sec/Twp/Rang	e:
. ,	or inspection: Property Transfer
• •	hone: 651-592-1670
or	
Owner's representative: Represent	tative phone:
Local regulatory authority: Washington County Regulatory	y authority phone: 651-430-6655
Brief system description: _Two pre-cast septic tanks, a pre-cast lif tank, and a gravelle	es trench drainfield.
Comments or recommendations: Although not a compliance criteria, it should be noted that gravelless pipe is no longer a Minnesota and we have had experience with this product having significantly reduced p cannot guarantee the performance of this system beyond the compliance date (8/6/201)	erformance and/or life expectancy. We
Certification	
I hereby certify that all the necessary information has been gathered to determine the condetermination of future system performance has been nor can be made due to unknown possible abuse of the system, inadequate maintenance, or future water usage.	
Inspector name: Brian Humpal/Christopher Uebe Certification	on number: _C5342/C9852
Business name: Inspect Minnesota, Midwest Soil Testing Licens	se number: L2896
Inspector signature: Phon	ne number: 651-492-7550
Necessary or Locally Required Attachments	
Soil boring logs	ocal ordinance
☑ Other information (list): Report Summary, Property Information, Disclaimer, Lice	

Property address: 4187 Kirkwood Ln N, Lake Elmo, MN 55052

Inspector initials/Date: 8/6/2019 8/4 ()/

1.	lm	pact on Public Health – Cor	npliance compone	nt #1 of 5			
	Compliance criteria:			Verification method(s):			
		stem discharge sewage to the ound surface.	☐ Yes ⊠ No	☑ Searched for surface outlet☑ Searched for seeping in yard/backup in home			
		stem discharge sewage to drain tile surface waters.	☐ Yes ⊠ No	 Excessive ponding in soil system/D-boxes Homeowner testimony (See Comments/Explanation) "Black soil" above soil dispersal system 			
		stem cause sewage backup into elling or establishment.	☐ Yes ⊠ No	System requires "emergency" pumping Performed dye test			
		ny "yes" answer above indicates Imminent Threat to Public Heal		 ☐ Unable to verify (See Comments/Explanation) ☑ Other methods not listed (See Comments/Explanation) 			
	Alt Mi		with this product hav	velless pipe is no longer approved for installation in the State of ing significantly reduced performance and/or life expectancy. We compliance date (8/6/2019).			
2.	Ta	nk Integrity – Compliance com	ponent #2 of 5				
	Co	ompliance criteria:		Verification method(s):			
		stem consists of a seepage pit, sspool, drywell, or leaching pit.	☐ Yes ⊠ No	☑ Probed tank(s) bottom☑ Examined construction records			
		epage pits meeting 7080.2550 may be npliant if allowed in local ordinance.		Examined Tank Integrity Form (Attach)Observed liquid level below operating depth			
	de	wage tank(s) leak below their signed operating depth. res, which sewage tank(s) leaks:	☐ Yes ⊠ No	☐ Examined empty (pumped) tanks(s)☐ Probed outside tank(s) for "black soil"			
	Any "yes" answer above indicates the system is Failing to Protect Groundwater.			 ☐ Unable to verify (See Comments/Explanation) ☑ Other methods not listed (See Comments/Explanation) 			
3.	Lo Lif	mments/Explanation: wered underwater camera into tanks - pump and alarm were operational at ther Compliance Conditions	the time of the inspe	ction.			
	a.	Maintenance hole covers are damaged	d, cracked, unsecured	, or appear to structurally unsound. ☐ Yes* ☒ No ☐ Unknown			
	b. Other issues (electrical hazards, etc.) to immediately and adversely impact public health or safety. ☐ Yes* ☒ No ☐ Unkr*System is an imminent threat to public health and safety						
		Explain:					
	C.	System is non-protective of ground wa *System is failing to protect ground Explain:		s as determined by inspector ☐ Yes* ☒ No			

www.pca.state.mn.us • 651-296-6300 • 800-657-3864 • TTY 651-282-5332 or 800-657-3864 • Available in alternative formats wq-wwists4-31 • 1/24/12 Page 2 of 3

Inspector initials/Date: 8/6/2019 8/4 ()

4.	Soil Separation – Compliance compor	nent #4 of 5			
	Date of installation: 2003	Unknown	Verification method(s):		
	Shoreland/Wellhead protection/Food Beverage Lodging?	⊠ Yes □ No	Soil observation does not expire. Probservations by two independent pa	not expire. Previous soil	
	Compliance criteria:		unless site conditions have been alt		
	For systems built prior to April 1, 1996, and not located in Shoreland or Wellhead Protection Area or not serving a food, beverage or lodging establishment:	☐ Yes ☐ No	requirements differ. ⊠ Conducted soil observation(s) (A □ Two previous verifications (Attac □ Not applicable (Holding tank(s), not	ch boring logs)	
	Drainfield has at least a two-foot vertical separation distance from periodically saturated soil or bedrock.		☐ Unable to verify (See Comments/Explanation) ☐ Other (See Comments/Explanation)		
	Non-performance systems built April 1, 1996, or later or for non-performance systems located in Shoreland or Wellhead Protection Areas or serving a food, beverage, or lodging establishment:	☐ Yes ⊠ No	Comments/Explanation:		
	Drainfield has a three-foot vertical separation distance from periodically saturated soil or bedrock.*				
	"Experimental", "Other", or "Performance"	☐ Yes ☐ No	Indicate depths of elevations		
	systems built under pre-2008 Rules; Type IV or V systems built under 2008 Rules (7080. 2350 or 7080.2400 (Advanced Inspector License required)		A. Bottom of distribution media	See Attached Boring Log(s)	
	Drainfield meets the designed vertical		B. Periodically saturated soil/bedrock		
	separation distance from periodically saturated soil or bedrock.		C. System separation		
	Any the 2 answer shows indicates 4	ha ayatam ia	D. Required compliance separation*		
	Any "no" answer above indicates to Failing to Protect Groundwater.	*May be reduced up to 15 percent if Ordinance.	fallowed by Local		
5.	Operating Permit and Nitrogen B	MP* – Compliance o	component #5 of 5 Not appl	licable	
	Is the system operated under an Operating Per	mit?	No If "yes", A below is required		
	Is the system required to employ a Nitrogen BMP?				
	BMP=Best Management Practice(s) specifi	ied in the system desigi	n		
	If the answer to both questions is "no",	this section does n	ot need to be completed.		
	Compliance criteria				
	a. Operating Permit number: Have the Operating Permit requirements been met?				
			☐ Yes ☐ No		
	b. Is the required nitrogen BMP in place and	properly functioning?	☐ Yes ☐ No		
	Any "no" answer indicates Nencom	nlianaa			

Any "no" answer indicates Noncompliance.

Property address: 4187 Kirkwood Ln N, Lake Elmo, MN 55052

Upgrade Requirements (Minn. Stat. § 115.55) An imminent threat to public health and safety (ITPHS) must be upgraded, replaced, or its use discontinued within ten months of receipt of this notice or within a shorter period if required by local ordinance. If the system is failing to protect ground water, the system must be upgraded, replaced, or its use discontinued within the time required by local ordinance. If an existing system is not failing as defined in law, and has at least two feet of design soil separation, then the system need not be upgraded, repaired, replaced, or its use discontinued, notwithstanding any local ordinance that is more strict. This provision does not apply to systems in shoreland areas, Wellhead Protection Areas, or those used in connection with food, beverage, and lodging establishments as defined in law.


www.pca.state.mn.us • 651-296-6300 • 800-657-3864 TTY 651-282-5332 or 800-657-3864 • Available in alternative formats Page 3 of 3

Inspect Minnesota & Midwest Soil Testing Subsurface Sewage Treatment System Owner/Property Information This information will be used for the purpose of conducting an MPCA Compliance Inspection.

Date of Inspection: August 6, 2019	Time: 1:30 PM				
Property Address: 4187 Kirkwood Ln N, Lake Elmo, MN	Zip: 55042				
Property Owner: Mike & Artemisa Boston	Phone: 651-592-1670				
Tank(s) Tank(s)Material Soil Treatment System Septic 2 Fiberglass Rock trench Aerobic Plastic Gravelless trench Lift Metal Chamber trench Holding Concrete Seepage bed Other: Block Mound Other At-grade	Other Alternative system Experimental system Cesspool system Other system				
Are the tank maintenance covers accessible? ☐ Yes ☐ No *If	no, proper maintenance must be				
performed through the maintenance holes. Maintenance hole cov	ers should be made accessible to				
the ground surface to facilitate access and proper maintenance of	the system.				
Year house built: 2003 Year septic installed: 2003	Tank size (gals.): 2-1000				
1 1	esidents in home?				
Number of bedrooms? 5 Are all floors drained by g					
Garbage disposal? Whirlpool bath					
More than one system (laundry, etc.)?	•				
Does this property have any footing drain tiles connected to the so	eptic system?				
Are any buildings on this property such as garages or out-buildings connected to this system?					
Are there any additional systems on this property serving other but	aildings?				
Location of septic system on lot? East Side					
Location of water well on lot? West Side Is the well a deep well? Y					
Have you ever experienced any problems with the system such as: tree roots, sewage back-ups,					
surfacing of sewage onto the ground, septic tank overflowing, etc.; or have any repairs been made to the system? If yes, explain:					
When was the system last pumped? 2017 Name of pun	nper: Meyer Sewer Service				
How often pumped in previous years? Is system	n on a monitoring plan?				
Have you received notices from any government agency concerning this system?					
Is your property located in a shoreland management area? Y					
Do you have any additional information that should be given to the new owner?					
I hereby certify that the above information is correct to the best of my knowledge. I also understand that if the system is considered "non-compliant/failing" per MPCA rules, that the inspector must by law submit a copy of this report to the local government unit within 15 days of the date of inspection completion. I also agree that unless otherwise noted in this report, that I/we are ultimately responsible for payment of all fees for all work performed relative to this inspection					

Owner/Occupant: Date:

by Inspect Minnesota and Midwest Soil Testing.

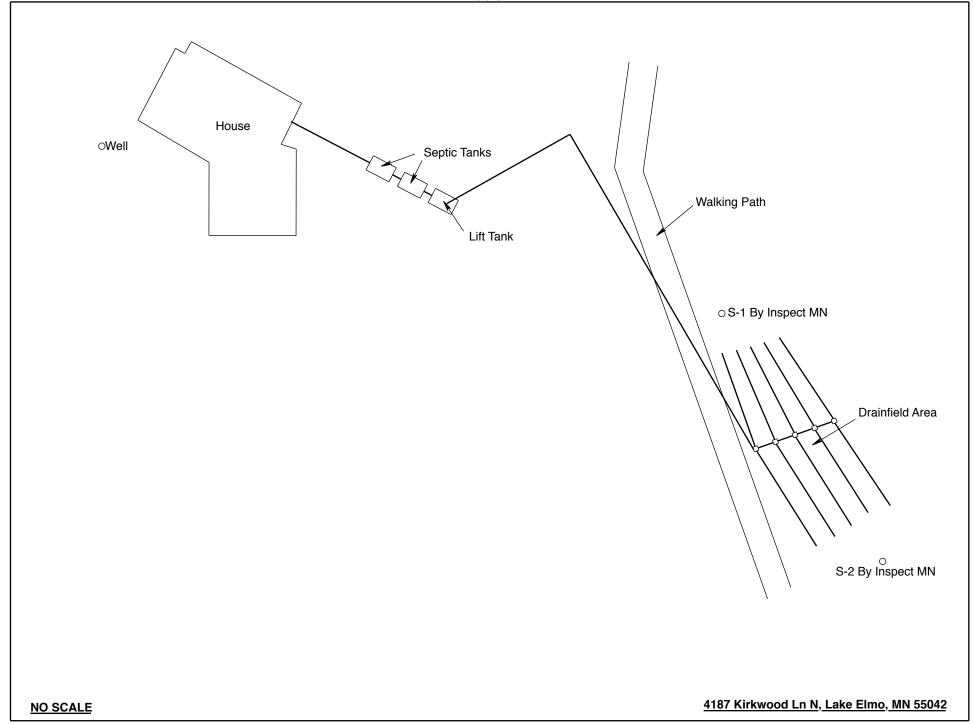

Soil Observations Log

Classification System: USDA	Location of Project: 4187 Kirkwood Ln N, Lake Elmo, MN 55042						
Soil Observation: 1 Surface Elevation of Observation Media -19" Depth To Bottom Of Distribution Media -19" Depth To Bottom of Distribution Media -19" Depth To Bottom of Observation At: 55" End Of Soil Observation At: 58" End Of Soil Observation At: 55"				•	•		8/6/19
Surface Elevation of Observation Same ground surface as last drainfied trench Depth In Inches Rock % Soils Encountered 10YR 3/3 Loamy Sand 10YR 3/4 Loamy Sand 10YR 3/6 Loamy Fine Sand 10YR 3/6 Loamy Fine Sand 10YR 3/6 Very Fine Sandy Loam With 7.5YR 5/8 & 10YR 6/1 Redox No Signs Of Fill, Compaction, Or Disturbed Soils Depth To End Of Soil Observation Or Redox Same Elevation of Observation Place in Compaction of Depth In Inches Depth In Inches Soils Encountered 10YR 3/4 Loamy Sand 10YR 3/6 Loamy Fine Sand 10YR 3/6 Loamy Fine Sand 10YR 3/6 Loamy Fine Sand 10YR 3/6 Very Fine Sand 10YR 3/4 Medium Sand 7.5YR 3/4 Weldium Sand 7.5YR 3/4 Very Fine Loamy Sand With Few 7.5YR 5/8 & Few 5YR 4/4 Redox No Signs Of Fill, Compaction, Or Disturbed Soils Depth To End Of Soil Observation Or Redox Same Elevation Of Observation Relative To System 19" Depth To Bottom Of Distribution Media 21" Of Separation Depth To Bottom Of Distribution Media 22" Of Separation End Of Soil Observation At: 58" End Of Soil Observation At: 55" Redox Present At: 40" Redox Present At: 45"	Classif	cation System:	USDA				
Same ground surface as last drainfied trench Soils Encountered Depth In Inches Soils Encountered Depth Inches Depth Inches Soils Encountered Depth Inches Soils Encountered Depth Inches Depth Inches Soils Encountered Depth Inches Dep	So	oil Observation:	1		Soil C	bservation:	2
10-13 10 10 10 10 10 10 10	Elevation of Same ground surface as last			Elevat	Elevation of Same ground surface as		
0-13 10YR 3/3 Loamy Sand 13-38 10YR 3/4 Loamy Sand 10YR 3/4 Loamy Sand 10YR 3/6 Loamy Fine Sand 10YR 3/6 Loamy Fine Sand 10YR 3/6 Very Fine Sandy Loam With 7.5YR 5/8 & 10YR 6/1 Redox No Signs Of Fill, Compaction, Or Disturbed Soils	י ו אחרע ש	Soils E	ncountered		Rock %	Soils	Encountered
Same Elevation Of Observation Relative To System Same Elevation Of Observation Relative To System -19" Depth To Bottom Of Distribution Media =21" Of Separation = 26" Of Separation End Of Soil Observation At: 58" End Of Soil Observation At: 55" Redox Present At: 40" Redox Present At: 45"	13-38 38-40	10YR 3/6 I 10YR 3/6 I 10YR 3/6 Ver With 7.5YR 5/	4 Loamy Sand Loamy Fine Sand y Fine Sandy Loam 8 & 10YR 6/1 Redox Fill, Compaction, Or	Inches 10YR 3/3 Loamy Sand 6-17 ≥50 10YR 3/4 Loamy Sand With Gra 17-38 10YR 3/4 Medium Sand 38-45 7.5YR 3/4 Medium Sand 45-55 7.5YR 3/4 Very Fine Loamy Sand W		amy Sand With Gravel 3/4 Medium Sand 3/4 Medium Sand ry Fine Loamy Sand With	
-19" Depth To Bottom Of Distribution Media = 21" Of Separation = 26" Of Separation = 26" Of Soil Observation At: 58" End Of Soil Observation At: 55" Redox Present At: 40" Redox Present At: 45"	40" Depth To End Of Soil Observation Or Redox		45"	Depth 1	o End Of Soil	Observation Or Redox	
=21" Of Separation =26" Of Separation End Of Soil Observation At: 58" End Of Soil Observation At: 55" Redox Present At: 40" Redox Present At: 45"							
End Of Soil Observation At: 58" End Of Soil Observation At: 55" Redox Present At: 40" Redox Present At: 45"						Distribution Media	
Redox Present At: 40" Redox Present At: 45"	=21" Of Separation		=26"	Of Sepa	ration		
Redox Present At: 40" Redox Present At: 45"	End Of Soil Observation At: 58"			End Of	Soil Oh	servation At:	55"
	Standing Water Present At: None			Standi			None

Bottom Of Distribution Medium At: 19 Inches				
Signature:	Offer 1/2			

DISCLAIMER

Brian L. Humpal, Inc. dba. Inspect Minnesota, Midwest Soil Testing Relative to Subsurface Sewage Treatment System (SSTS) Compliance Inspections

- 1. This inspection/report is being performed for only the seller/owner of the property on which the SSTS is located. In such case that another party is paying for the inspection, the contract is between only said party and Brian L. Humpal, Inc.; there is no contract between Brian L. Humpal, Inc. and any other party unless otherwise noted.
- 3. Brian L. Humpal, Inc. has not been retained to warranty, guarantee, or certify the proper functioning of the SSTS for any period of time beyond the date of inspection or into the future. Because of the numerous factors (usage, maintenance, soil characteristics, previous failures, etc.) which may affect the proper operation of an SSTS, as well as the inability of Brian L. Humpal, Inc. to supervise or monitor the use or maintenance of the SSTS, the report shall not be construed as a warranty by Brian L. Humpal, Inc. that the SSTS will function properly for any particular party for any period of time.
- 4. Brian L. Humpal, Inc. is unable to verify the frequency and/or, quality of prior or future maintenance of the SSTS. Maintenance of the tank(s) must be performed through the tanks maintenance hole. The removal of solids from any location other than the maintenance hole is not a compliant method of maintenance. It is strongly recommended that maintenance covers be made accessible to the ground surface to facilitate proper maintenance.
- 5. Minimum Compliance Inspection requirements relative to this inspection and this report include <u>only</u> verification that the SSTS has tank(s) (septic tanks, lift tanks, dosing tanks, stilling tanks, etc.) which are watertight below the designed operating depth, the required separation between the bottom of the subsurface soil distribution medium and seasonally saturated soils, no back-ups of sewage into the dwelling, no discharge of sewage/effluent to the ground surface or surface waters, and no imminent safety hazards. Brian L. Humpal, Inc. does not inspect plumbing or pumps prior to the first SSTS component as these are plumbing components. The performance of exterior pumps and associated components are not inspected as they are considered to be maintenance items. Additionally, no indications relative to compliance with electrical code requirements have been made. It is recommended that any other applicable plumbing, electrical, housing, etc. inspections be performed by a qualified inspection business. Sewage back-up verification is limited to observing the floor drain area and/or the information supplied by the last occupants of the building prior to inspection. Brian L. Humpal, Inc. cannot guarantee that the information given to them by the last occupants of the building prior to inspection relative to back-ups is accurate.
- 4. Certification of this SSTS does not warranty future use beyond the date of the inspection. Any SSTS, old or new, can become hydraulically overloaded or discharge sewage/effluent to the ground surface as a result of more people moving into the house than were previously occupying the house, improper maintenance, heavy usage, leaking plumbing fixtures, groundwater infiltration, tree roots, freezing conditions, surface drainage problems, poor initial design, poor construction practices, or unsuitable materials used in constructing the system; the system can also simply stop working because of its age. An SSTS that has been properly designed and installed, properly maintained, and used in the manner for which the system was designed can be expected to provide service for twenty to twenty-five years on average. Some parts of the SSTS such as alarms, switches, pumps, filters, etc. will most likely have to be repaired or replaced over the lifetime of the system.
- 5. A Compliance Inspection is not meant to be a test or inspection for longevity of the system; a Compliance Inspection is strictly for the purpose of determining if the SSTS is protective of public health and safety, as well as the groundwater at the date and time the inspection was performed. This inspection is not intended to determine if the SSTS was originally designed or installed to past or present MPCA or other Local Government Unit code requirements. This inspection is not intended to determine if the SSTS was designed and/or installed to support the anticipated flow from the building as the use of the building may have changed since the design and construction of the SSTS due to the addition of bedrooms, occupants, etc. In addition, this inspection is not intended to determine the quality of the original SSTS design, the quality of the construction practices used while installing the SSTS, or the quality of the materials used in constructing the SSTS.
- 6. Brian L. Humpal, Inc. cannot guarantee the performance of SSTS products/components such as: gravelless pipe, chamber trenches, effluent filters, tanks, sewage pre-treatment components, piping, etc. Products such as gravelless pipe are no longer approved for installation in the State of Minnesota and may have a significantly reduced performance and/or life expectancy.
- 7. WINTER WORK: By accepting this report, it is understood that inspections conducted during winter months (approximately November 1st through April 1st) are more difficult to perform because of possible snow cover and/or ground frost. SSTS components such as tanks, maintenance covers, tank inspection pipes, subsurface distribution medium inspection pipes, and soil treatment areas are more difficult or impossible to locate due to snow cover and/or ground frost. In addition, soil borings are more difficult to perform due to snow cover and/or ground frost. Brian L. Humpal, Inc. will attempt to use the same level of standards when performing work during winter periods as when performing work during non-winter periods. However, the recipient of this report understands that because of the aforementioned considerations, the same level of standards may not be possible.
- 8. By accepting this report, the client understands that Brian L. Humpal, Inc. will not be responsible for any monetary damages exceeding the fee for the services provided.

Subsurface Sewage Treatment Systems

Non-transferable

Business License

Inspect Minnesota, Midwest Soil Testing

License # L2896

License Expires: 12/22/2019

Issued: 11/20/2018

Specialty Area(s):

Installer
Maintainer
Service Provider
Advanced Designer
Advanced Inspector

Designated Certified Individual(s):

Cert #	Name	Certification Expires:
C9633	Anthony P Scully	3/5/2020
	Installer, Designer (Apprentice)	, v , v
C5342	Brian L Humpal	10/15/2023
	Installer, Maintainer, Serv Prov, Adv	Designer, Adv Inspector
C9852	Christopher R Uebe	3/4/2021
	Designer, Inspector	



520 Lafayette Road North St. Paul, Minnesota 55155-4194 Nich Haig

Nick Haig, Supervisor Certification and Training Unit